


REV	ECN.NO:	B Y	DATE
A0	NEW-DWG	ING	10/04/23

NOTE:
MATERIAL:
HOUSING:PBT+30% G.F. UL 94V-0
CONTACT:PHOSPHOR BRONZE
SHELL:BRASS
PLATING:
CONTACT: GOLD FLASH AND TIN OVER NICKEL PLATED
SHELL: NICKEL PLATED OVER ALL
SPECIFICATION:
CURRENT-MAX[AMPS]:1.5A
VOLTAGE-MAX[VOLTS]:30V
WITHSTANDING VOLTAGE: 500V AC
CONTACT RESISTANCE[OHMS]:30 milliohms max
INSULATION RESISTANCE[OHMS]: 1000 MEGOHMS MIN
ENVIRONMENTAL
TEMPERATURE RANGE -55°C~+85°C

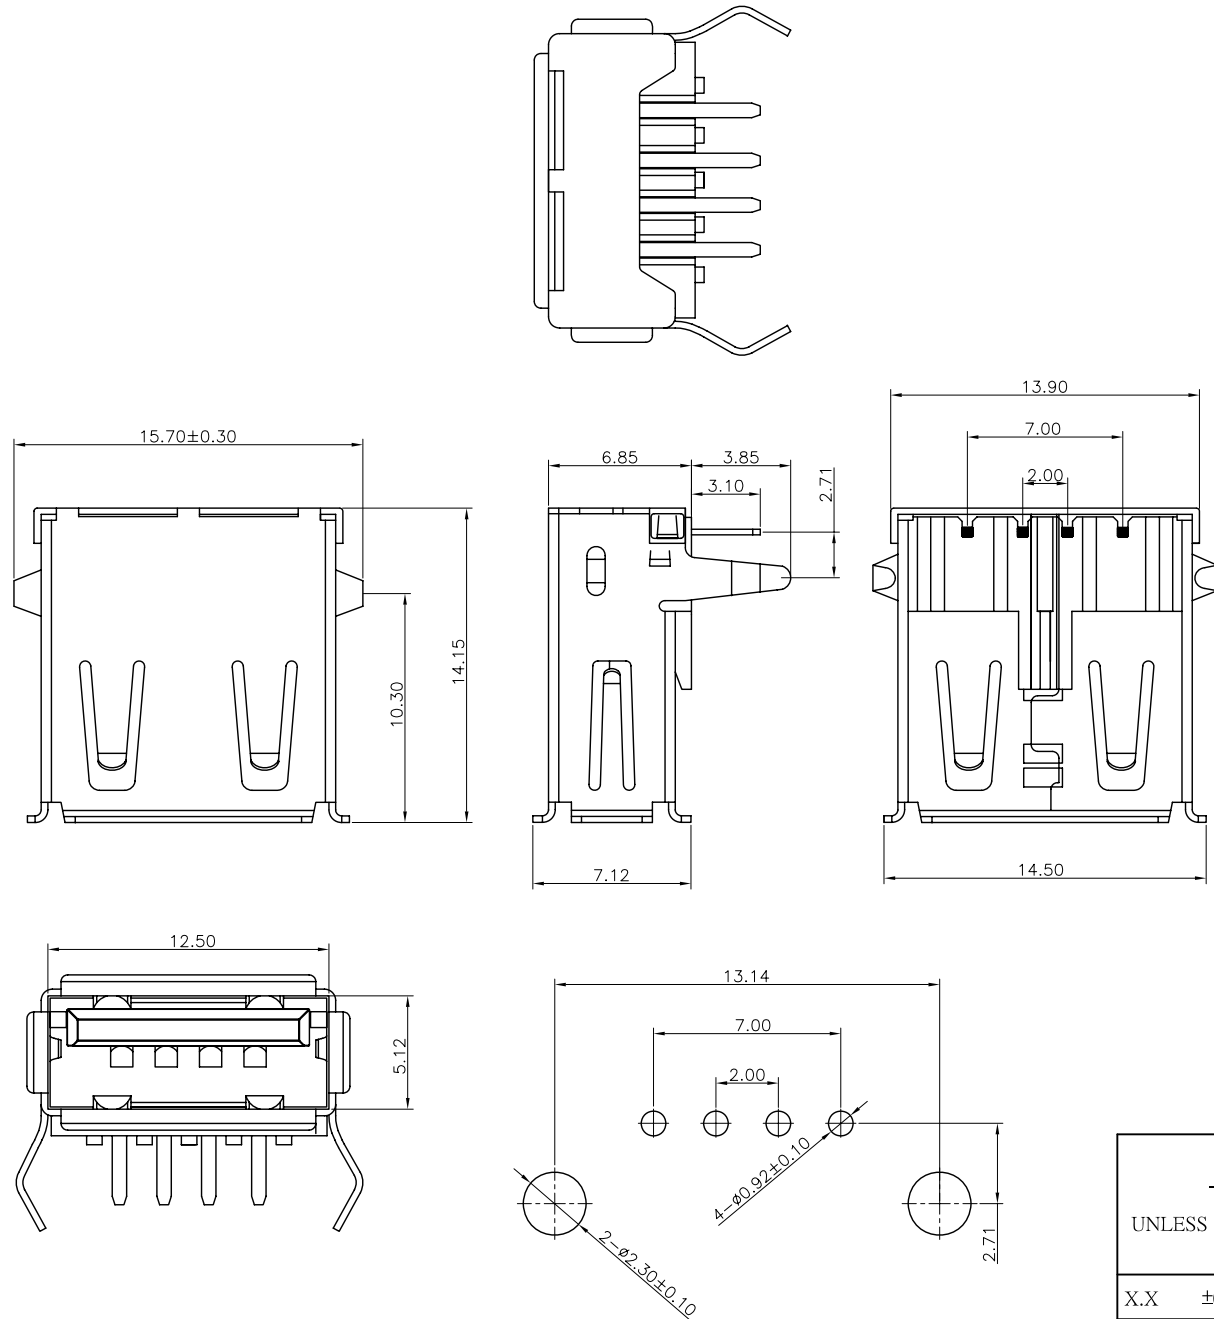

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		CnC Tech,LLC							
				TITLE: USB 4P A/F DIP 90° 30U 銅殼成品					
X.X	± 0.38	X.X°	$\pm 3.0^\circ$	APPD:	PRODUCT NO: 1002-001-01000				
X.XX	± 0.25	X.XX°	$\pm 1.0^\circ$	CHECK:	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	± 0.13	X.XXX°	$\pm 0.5^\circ$	DRAW:	2010.04.23	FREE	MM	Z	1