


PT6200 Series

SLTS063

**2 AMP HIGH-PERFORMANCE ADJUSTABLE
ISR WITH ON/OFF CONTROL**

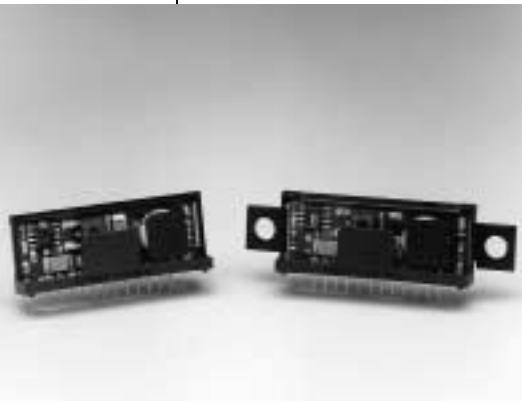


- 90% Efficiency
- Adjustable Output Voltage
- Internal Short Circuit Protection
- Over-Temperature Protection
- On/Off Control (Ground Off)
- Small SIP Footprint
0.36" x 1.64" x 0.60"(H)

The PT6200 Series is a line of High-Performance 2 Amp, 12-Pin SIP (Single In-line Package) Integrated Switching Regulators (ISRs) designed

to meet the on-board power conversion needs of battery powered or other equipment requiring high efficiency and small size. This high performance ISR family offers a unique combination of features combining 90% typical efficiency with open-collector on/off control and adjustable output voltage. Quiescent current in the shutdown mode is less than 100µA.

Standard Application

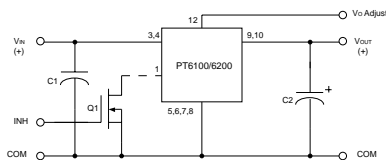

C₁ = Optional ceramic (1µF)
Q₁ = NFET
C₂ = Required 100µF electrolytic

Pin-Out Information

Pin No.	Function	Pin No.	Function
1	Inhibit	7	GND
2	N/C	8	GND
3	V _{in}	9	V _{out}
4	V _{in}	10	V _{out}
5	GND	11	N/C
6	GND	12	V _{out Adj}

Ordering Information

- PT6202□ = +5 Volts
 PT6203□ = +3.3 Volts
 PT6204□ = +12 Volts
 (For dimensions, see page 65.)

PT Series Suffix (PT1234X)

Case/Pin Configuration	Heat Tab Configuration	
	None	Side
Vertical Through-Hole	N	R
Horizontal Through-Hole	A	G
Horizontal Surface Mount	C	B

(See Thermal Application Notes on page 44 for heat tab application data.)

Specifications

Characteristics (T _a =25°C unless note d)	Symbols	Conditions	PT6200 SERIES			
			Min	Typ	Max	Units
Output Current	I _o	Over V _{in} range	0.1**	—	2.0	Amps
Current Limit	I _{cl}	V _{in} = V _o + 5V	—	3.5	4.5	Amps
Short Circuit Current	I _{sc}	V _{in} = V _o + 5V	—	5.0	—	Apk
Input Voltage Range	V _{in}	0.1 ≤ I _o ≤ 2.0 Amp V _o = 3.3V V _o = 5V V _o = 12V	7 7.25 14.5	—	26 30 30	VDC VDC VDC
Static Voltage Tolerance	V _o	Over V _{in} Range, I _o = 2.0 Amp T _A = -40° C to shutdown	—	±1.0	±2.0	%V _o
Line Regulation	Reg _{line}	Over V _{in} range	—	±0.25	±0.5	%V _o
Load Regulation	Reg _{load}	0.1 ≤ I _o ≤ 2.0 Amp	—	±0.25	±0.5	%V _o
Ripple/Noise	V _n	V _{in} = V _o + 5V, I _o = 2.0 Amp	—	±2	—	%V _o
Transient Response with C _o = 100µF	t _{tr} V _{os}	50% load change V _o over/undershoot	—	100 3.0	200 5.0	µSec %V _o
Efficiency	η	V _{in} =8V, I _o = 0.5 Amp, V _o = 3.3V V _{in} =8V, I _o = 0.5 Amp, V _o = 5V V _{in} =15V, I _o = 0.5 Amp, V _o = 12V	—	85 90 93	—	% % %
Switching Frequency	f _o	Over V _{in} and I _o ranges, V _o = 3.3V V _o = 5V V _o = 12V	400 500 500	500 650 650	600 800 800	KHz KHz KHz
Shutdown Current	I _{sc}	V _{in} = 15V	—	100	—	µAmp
Quiescent Current	I _{nl}	I _o = 0A, V _{in} = 10V	—	10	—	mAmp
Output Voltage Adjustment Range	V _o	Below V _o Above V _o	See Application Notes on page 40.			
Operating Temperature	T _A	Free Air Convection, (40-60LFM) 5V Over V _{in} and I _o ranges 12V	-40 -40 -40	—	+85* +60* *	C
Thermal Resistance	θ _{JA}	Free Air Convection (40-60LFM) V _o = 3.3V V _o = 5V V _o = 12V	—	25 30 35	—	C/W
Storage Temperature	T _s	—	-40	—	+125	C
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3 Condition A, 1 msec, Half Sine, mounted to a fixture	—	—	500	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2 Condition A, 20-2000 Hz	—	—	15	G's
Weight	—	—	—	8.5	—	grams
Relative Humidity	—	Non-condensing	0	—	95	%


*See Thermal Derating chart. ** ISR will operate down to no load with reduced specifications.
Note: The PT6200 Series requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications.

CHARACTERISTIC DATA


PT6203, 3.3 VDC

(See Note 1)

Efficiency vs Output Current

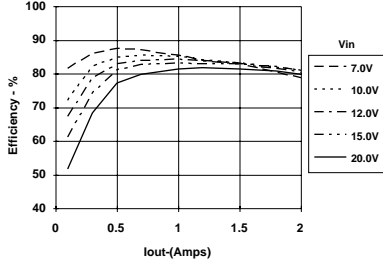


Ripple vs Output Current

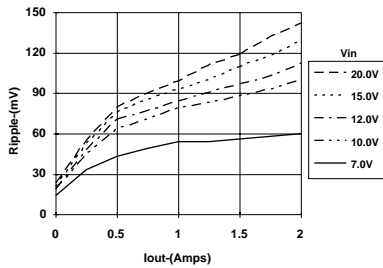


Minimum Input Voltage

(See Note 2)

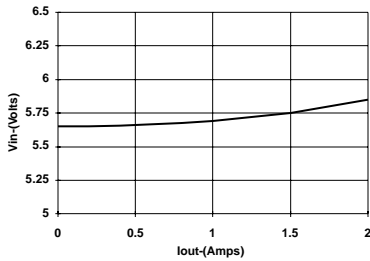


Thermal Derating (Ta)

(See Note 3)

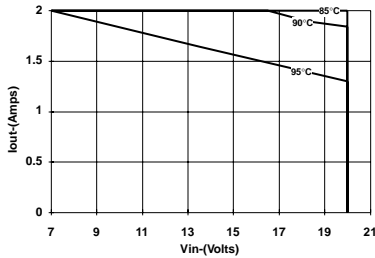


Power Dissipation vs Output Current

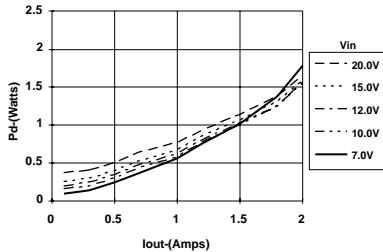


PT6202, 5.0 VDC

(See Note 1)

Efficiency vs Output Current

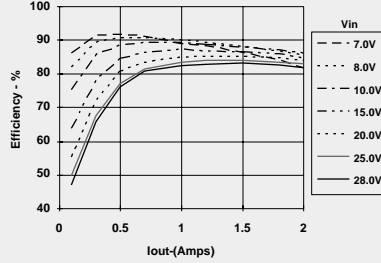


Ripple vs Output Current

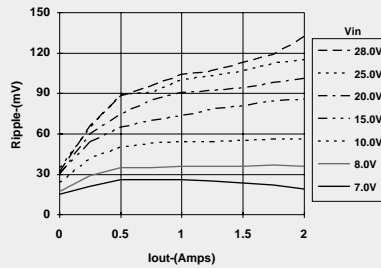


Minimum Input Voltage

(See Note 2)

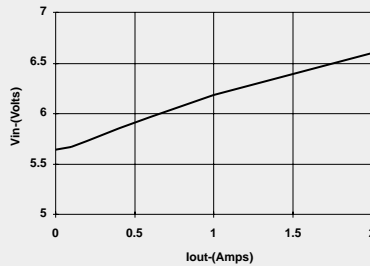


Thermal Derating (Ta)

(See Note 3)

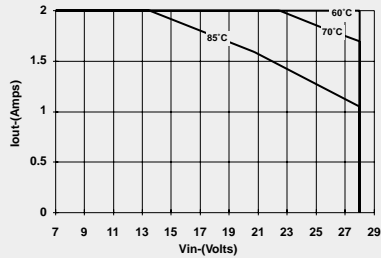


Power Dissipation vs Output Current

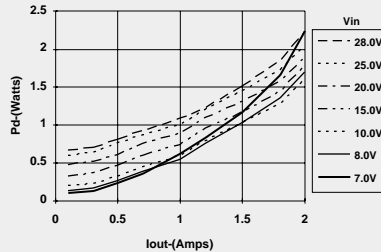


PT6204, 12.0 VDC

(See Note 1)

Efficiency vs Output Current

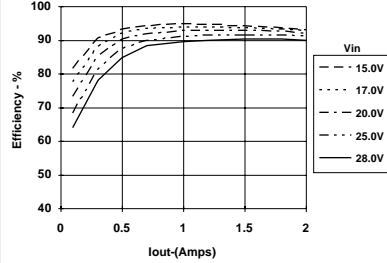


Ripple vs Output Current

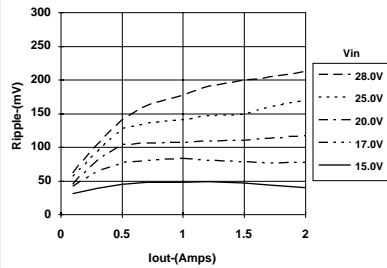


Minimum Input Voltage

(See Note 2)

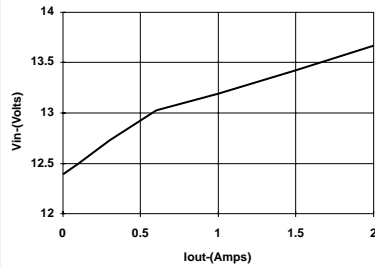


Thermal Derating (Ta)

(See Note 3)

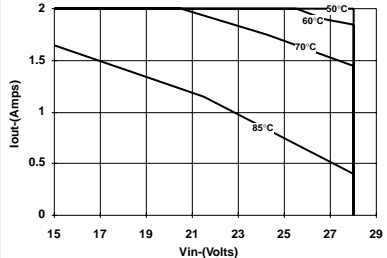

Power Dissipation vs Output Current

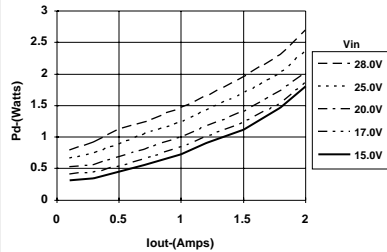

Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

Note 2: Minimum Vin data is typical and is not guaranteed. The data corresponds to a 2% output voltage drop.

Note 3: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM with no optional heat tab. (See Thermal Application Notes).

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, license, warranty or endorsement thereof.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations and notices. Representation or reproduction of this information with alteration voids all warranties provided for an associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Also see: [Standard Terms and Conditions of Sale for Semiconductor Products](http://www.ti.com/sc/docs/stdterms.htm). www.ti.com/sc/docs/stdterms.htm

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265