


### FEATURES

- **NEW MINIATURE M03 PACKAGE:**
  - Small transistor outline
  - Low profile / 0.59 mm package height
  - Flat lead style for better RF performance
- **IDEAL FOR  $\leq 3$  GHz OSCILLATORS**
- **LOW 1/f NOISE**
- **LOW PUSHING FACTOR**

### DESCRIPTION

NEC's NE851M03 transistor is designed for oscillator applications up to 3 GHz. The NE851M03 features low voltage operation, low phase noise, and high immunity to pushing effects. NEC's low profile/flat lead style "M03" package is ideal for today's portable wireless applications.

### OUTLINE DIMENSIONS (Units in mm)

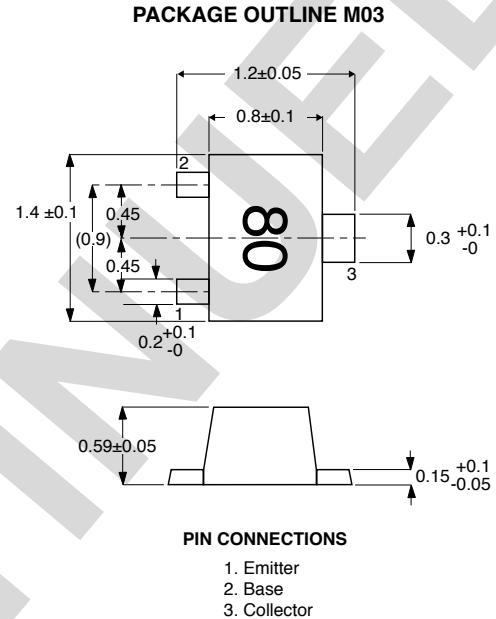

### ELECTRICAL CHARACTERISTICS (TA = 25°C)

| PART NUMBER<br>EIAJ <sup>1</sup> REGISTERED NUMBER<br>PACKAGE OUTLINE |  | NE851M03<br>2SC5800<br>M03 |     |     |     |
|---|--|----------------------------|-----|-----|-----|
| SYMBOLS   | PARAMETERS AND CONDITIONS  | UNITS                      | MIN | TYP | MAX |
| ft  | Gain Bandwidth at VCE = 1 V, IC = 5 mA, f = 2 GHz<br>at VCE = 1 V, IC = 15 mA, f = 2 GHz       | GHz                        | 3.0 | 4.5 | –   |
|   |  | GHz                        | 5.0 | 6.5 | –   |
| IS21E1 <sup>2</sup>   | Insertion Power Gain at VCE = 1 V, IC = 5 mA, f = 2 GHz<br>at VCE = 1 V, IC = 15 mA, f = 2 GHz | dB                         | 3.0 | 4.0 | –   |
|   |  | dB                         | 4.5 | 5.5 | –   |
| NF  | Noise Figure at VCE = 1 V, IC = 10 mA, f = 2 GHz, Zs = Zopt                                    | dB                         | –   | 1.9 | 2.5 |
| CRE   | Reverse Transfer Capacitance <sup>3</sup> at VCB = 0.5 V, IE = 0 mA, f = 1 MHz                 | pF                         | –   | 0.6 | 0.8 |
| ICBO  | Collector Cutoff Current at VCB = 5 V, IE = 0  | nA                         | –   | –   | 600 |
| IEBO  | Emitter Cutoff Current at VEB = 1 V, IC = 0  | nA                         | –   | –   | 600 |
| hFE   | DC Current Gain <sup>2</sup> at VCE = 1 V, IC = 5 mA   |                            | 100 | 120 | 145 |

**Notes:**

1. Electronic Industrial Association of Japan.
2. Pulsed measurement, pulse width  $\leq 350 \mu\text{s}$ , duty cycle  $\leq 2\%$ .
3. Collector to base capacitance when the emitter is grounded

**ABSOLUTE MAXIMUM RATINGS<sup>1</sup>** ( $T_A = 25^\circ\text{C}$ )





| SYMBOLS   | PARAMETERS                   | UNITS            | RATINGS     |
|-----------|------------------------------|------------------|-------------|
| $V_{CB0}$ | Collector to Base Voltage    | V                | 9.0         |
| $V_{CE0}$ | Collector to Emitter Voltage | V                | 5.5         |
| $V_{EB0}$ | Emitter to Base Voltage      | V                | 1.5         |
| $I_C$     | Collector Current            | mA               | 100         |
| $P_T^2$   | Total Power Dissipation      | mW               | 200         |
| $T_J$     | Junction Temperature         | $^\circ\text{C}$ | 150         |
| $T_{STG}$ | Storage Temperature          | $^\circ\text{C}$ | -65 to +150 |

Notes:

- Operation in excess of any one of these parameters may result in permanent damage.
- With device mounted on 1.08 cm<sup>2</sup> X 1.0 mm (t) glass epoxy board.


**ORDERING INFORMATION**

| PART NUMBER   | QUANTITY      |
|---------------|---------------|
| NE851M03-T1-A | 3 k pcs./reel |

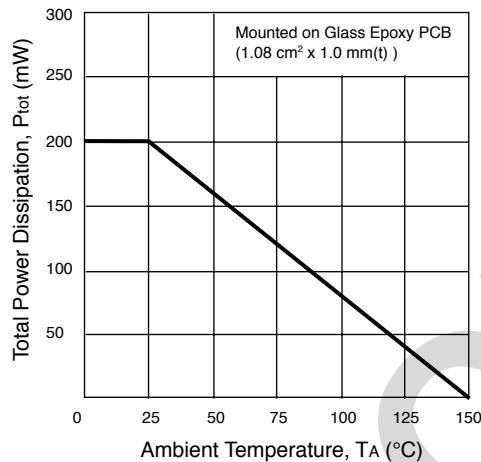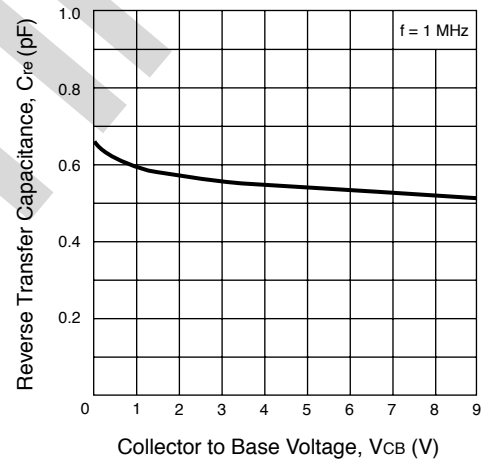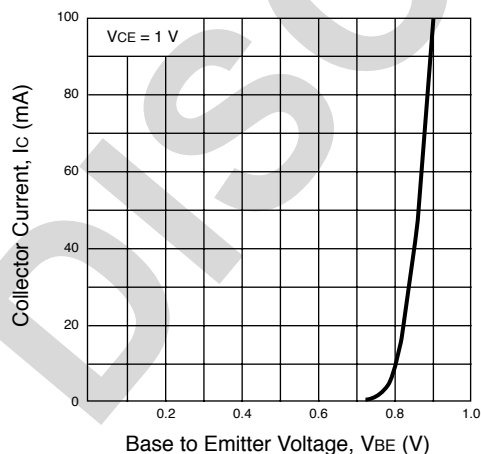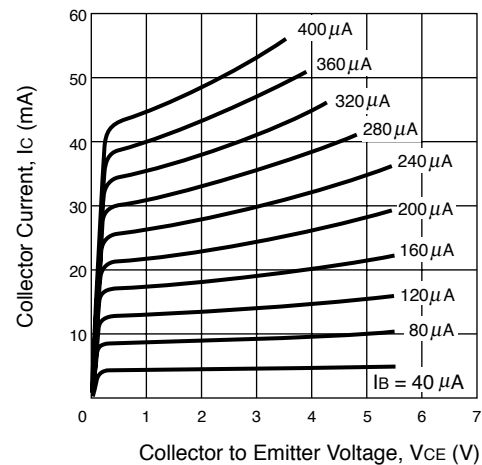
**TYPICAL PERFORMANCE CURVES** ( $T_A = 25^\circ\text{C}$ )**TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE****REVERSE TRANSFER CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE****COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE****COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE**

TYPICAL PERFORMANCE CURVES (TA = 25°C)


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

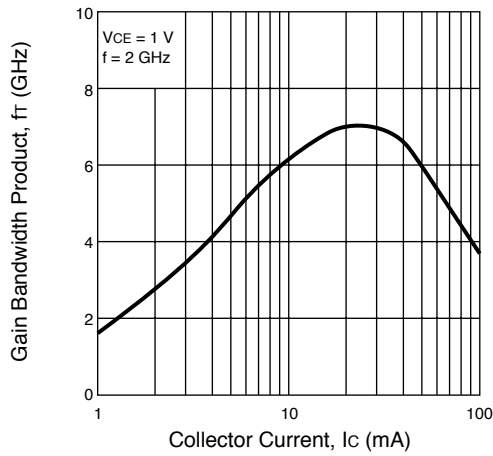


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

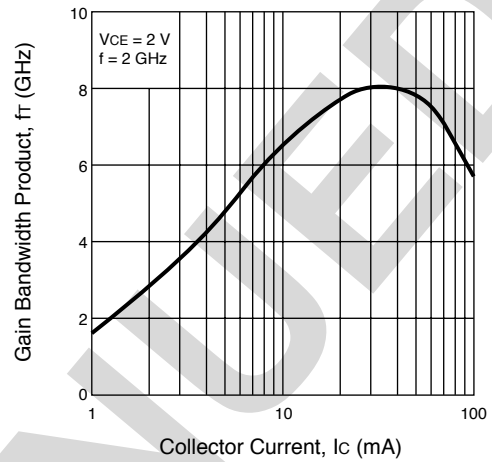


INSERTION POWER GAIN vs. FREQUENCY

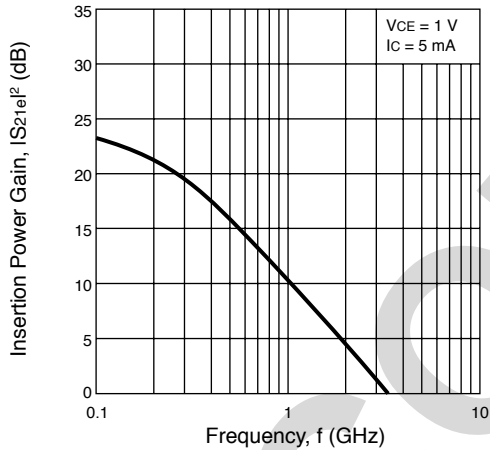


INSERTION POWER GAIN vs. FREQUENCY






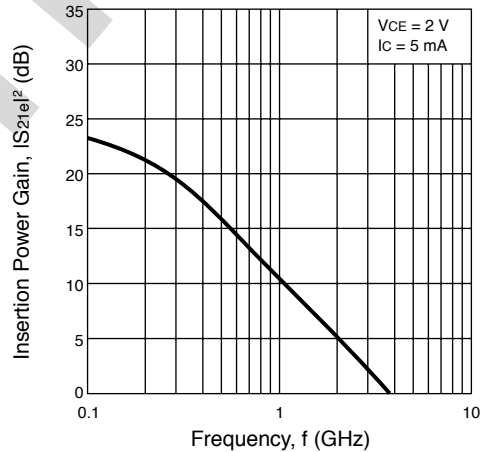


INSERTION POWER GAIN vs. FREQUENCY

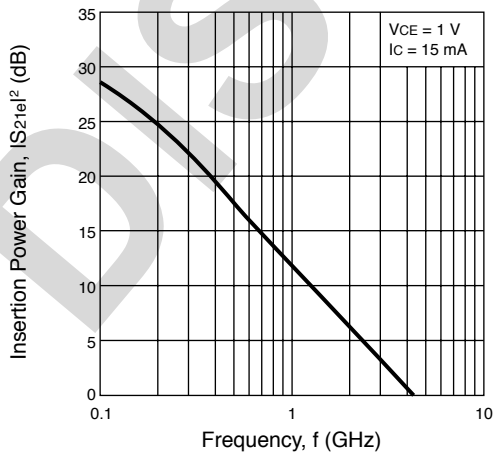


INSERTION POWER GAIN vs. FREQUENCY

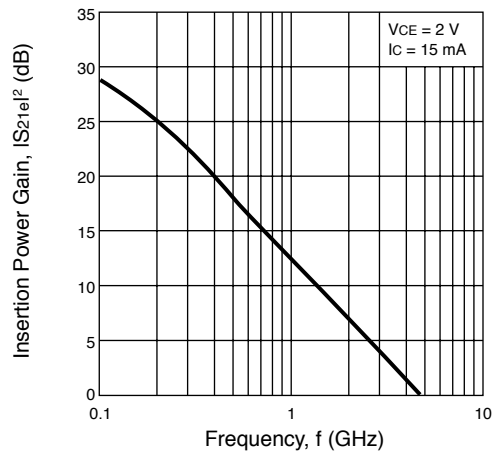

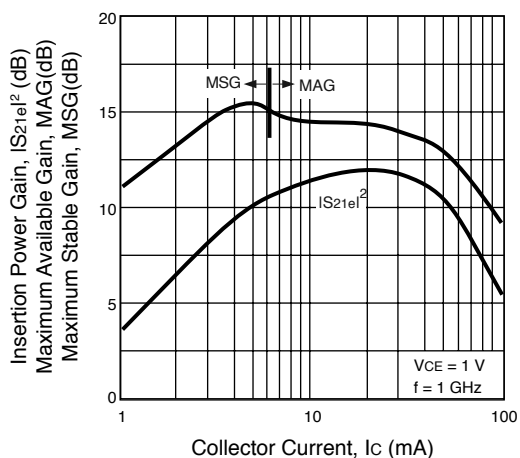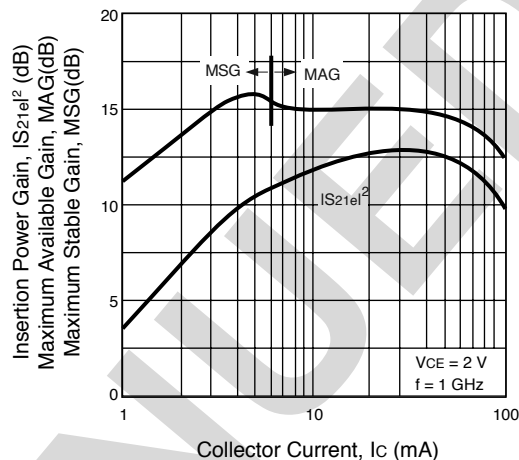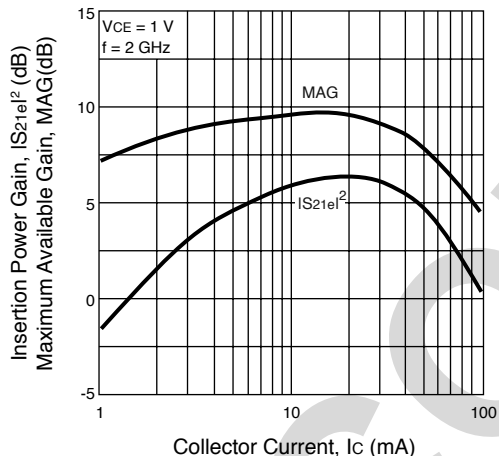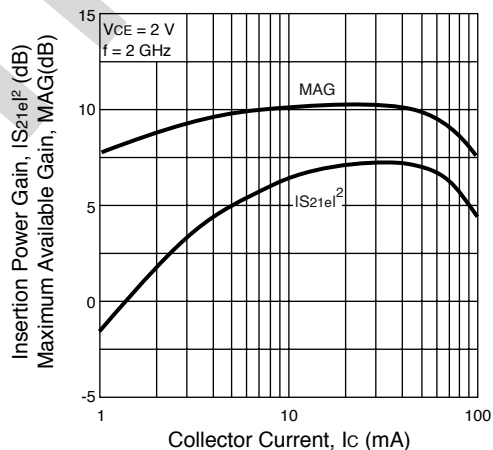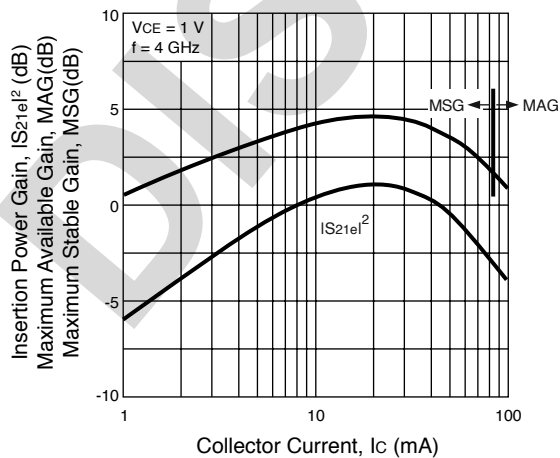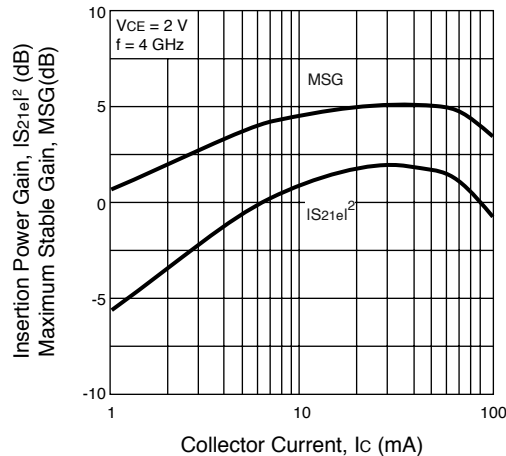
TYPICAL PERFORMANCE CURVES ( $T_A = 25^\circ\text{C}$ )INSERTION POWER GAIN, MAG,  
MSG vs. COLLECTOR CURRENTINSERTION POWER GAIN, MAG, MSG  
vs. COLLECTOR CURRENTINSERTION POWER GAIN and MAG  
vs. COLLECTOR CURRENTINSERTION POWER GAIN and MAG  
vs. COLLECTOR CURRENTINSERTION POWER GAIN, MAG, MSG  
vs. COLLECTOR CURRENTINSERTION POWER GAIN, MSG vs.  
COLLECTOR CURRENT

TYPICAL PERFORMANCE CURVES (T<sub>A</sub> = 25°C)


NOISE FIGURE and ASSOCIATED GAIN vs. COLLECTOR CURRENT

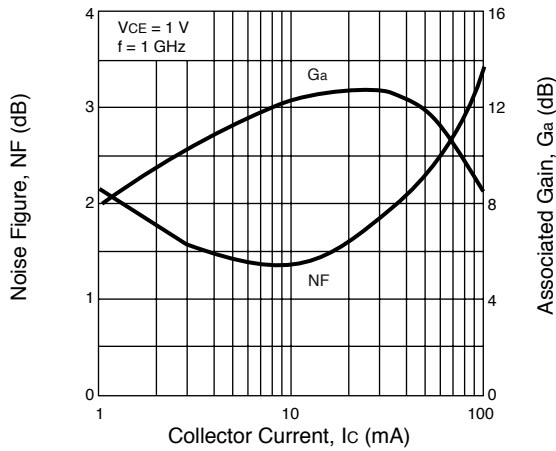


NOISE FIGURE and ASSOCIATED GAIN vs. COLLECTOR CURRENT

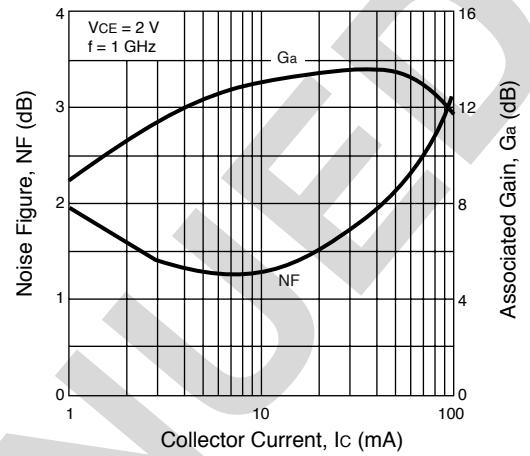


NOISE FIGURE and ASSOCIATED GAIN vs. COLLECTOR CURRENT

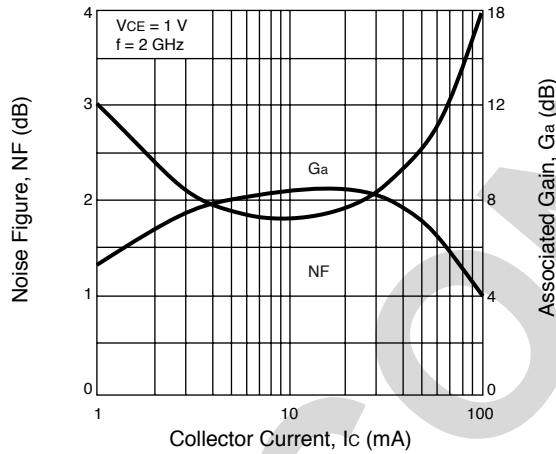


NOISE FIGURE and ASSOCIATED GAIN vs. COLLECTOR CURRENT

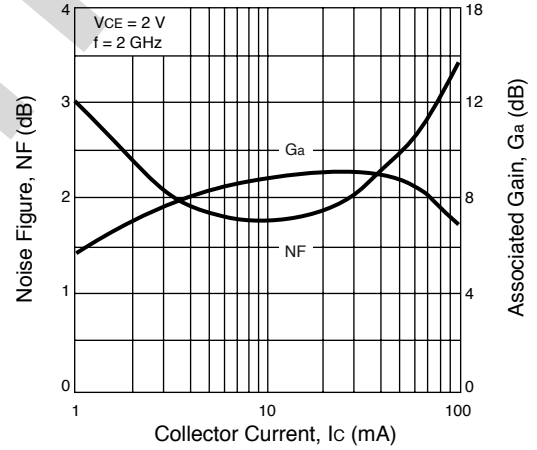



OUTPUT POWER AND COLLECTOR CURRENT vs. INPUT POWER

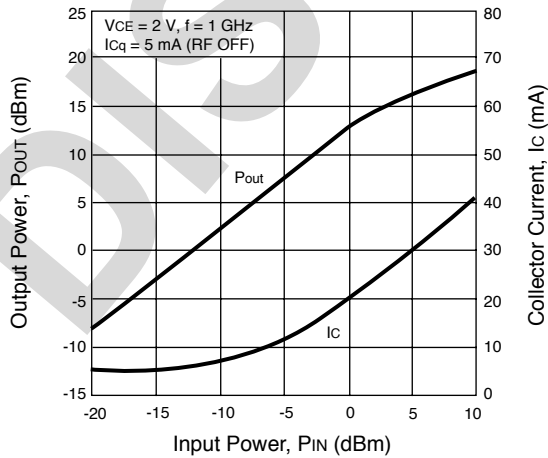

OUTPUT POWER AND COLLECTOR CURRENT vs. INPUT POWER

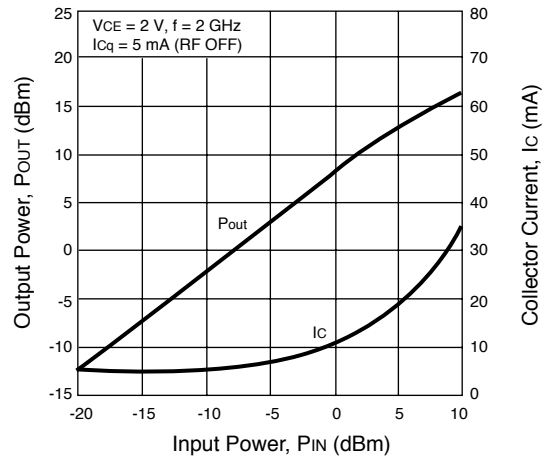

**TYPICAL SCATTERING PARAMETERS** (TA = 25°C)

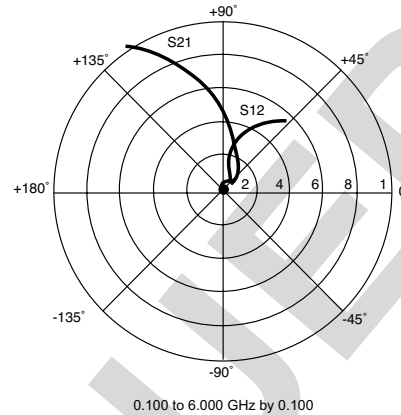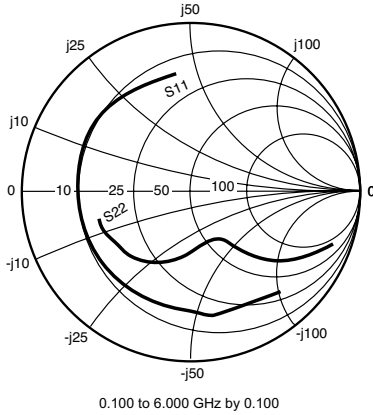

**NE851M03**  
**Vc = 1 V, Ic = 5 mA**

| FREQUENCY<br>GHz | S11   |         | S21    |        | S12   |       | S22   |         | K     | MAG <sup>1</sup><br>(dB) |
|------------------|-------|---------|--------|--------|-------|-------|-------|---------|-------|--------------------------|
|                  | MAG   | ANG     | MAG    | ANG    | MAG   | ANG   | MAG   | ANG     |       |                          |
| 0.100            | 0.824 | -46.13  | 13.999 | 152.23 | 0.033 | 66.48 | 0.903 | -21.08  | 0.089 | 26.32                    |
| 0.200            | 0.748 | -80.11  | 11.531 | 131.89 | 0.051 | 52.70 | 0.745 | -34.82  | 0.187 | 23.51                    |
| 0.300            | 0.705 | -104.73 | 9.279  | 118.04 | 0.062 | 43.78 | 0.620 | -42.24  | 0.283 | 21.75                    |
| 0.400            | 0.679 | -121.76 | 7.580  | 108.36 | 0.067 | 39.96 | 0.537 | -46.40  | 0.368 | 20.54                    |
| 0.500            | 0.673 | -141.72 | 6.194  | 98.80  | 0.068 | 35.59 | 0.410 | -53.91  | 0.510 | 19.57                    |
| 0.700            | 0.666 | -155.88 | 4.587  | 89.15  | 0.072 | 37.14 | 0.356 | -57.66  | 0.677 | 18.03                    |
| 1.000            | 0.664 | -168.35 | 3.313  | 78.69  | 0.078 | 43.34 | 0.331 | -62.07  | 0.872 | 16.26                    |
| 1.100            | 0.665 | -171.53 | 3.030  | 75.69  | 0.081 | 45.75 | 0.327 | -64.09  | 0.924 | 15.75                    |
| 1.200            | 0.664 | -174.29 | 2.794  | 72.95  | 0.083 | 48.31 | 0.325 | -65.91  | 0.976 | 15.26                    |
| 1.300            | 0.665 | -176.88 | 2.593  | 70.20  | 0.086 | 51.04 | 0.326 | -68.31  | 1.010 | 14.15                    |
| 1.400            | 0.664 | -179.25 | 2.424  | 67.64  | 0.090 | 53.34 | 0.329 | -70.20  | 1.039 | 13.11                    |
| 1.500            | 0.665 | 178.52  | 2.274  | 65.18  | 0.094 | 55.84 | 0.332 | -72.21  | 1.056 | 12.40                    |
| 1.600            | 0.666 | 176.60  | 2.145  | 62.84  | 0.098 | 58.31 | 0.335 | -74.41  | 1.065 | 11.82                    |
| 1.700            | 0.666 | 174.50  | 2.029  | 60.56  | 0.103 | 60.46 | 0.340 | -76.60  | 1.071 | 11.31                    |
| 1.800            | 0.666 | 172.69  | 1.928  | 58.37  | 0.109 | 62.48 | 0.345 | -78.64  | 1.066 | 10.91                    |
| 1.900            | 0.666 | 170.70  | 1.835  | 56.25  | 0.115 | 64.26 | 0.351 | -80.85  | 1.064 | 10.49                    |
| 2.000            | 0.666 | 169.07  | 1.754  | 54.18  | 0.121 | 66.01 | 0.356 | -83.15  | 1.056 | 10.17                    |
| 2.100            | 0.667 | 167.34  | 1.677  | 52.01  | 0.128 | 67.42 | 0.362 | -85.49  | 1.039 | 9.96                     |
| 2.200            | 0.667 | 165.53  | 1.610  | 50.17  | 0.135 | 68.65 | 0.370 | -87.59  | 1.021 | 9.87                     |
| 2.300            | 0.667 | 163.82  | 1.548  | 48.31  | 0.143 | 69.81 | 0.377 | -89.58  | 1.004 | 9.96                     |
| 2.400            | 0.668 | 162.04  | 1.491  | 46.50  | 0.152 | 70.84 | 0.383 | -91.66  | 0.983 | 9.93                     |
| 2.500            | 0.669 | 160.31  | 1.440  | 44.69  | 0.160 | 71.44 | 0.391 | -93.66  | 0.959 | 9.53                     |
| 2.600            | 0.669 | 158.48  | 1.391  | 42.95  | 0.169 | 72.05 | 0.397 | -95.62  | 0.944 | 9.15                     |
| 2.700            | 0.670 | 156.71  | 1.347  | 41.25  | 0.179 | 72.44 | 0.405 | -97.78  | 0.920 | 8.77                     |
| 2.800            | 0.669 | 154.91  | 1.305  | 39.67  | 0.189 | 72.75 | 0.412 | -99.60  | 0.903 | 8.39                     |
| 2.900            | 0.669 | 152.89  | 1.265  | 38.08  | 0.199 | 72.87 | 0.420 | -101.42 | 0.888 | 8.03                     |
| 3.000            | 0.671 | 151.05  | 1.228  | 36.56  | 0.209 | 72.79 | 0.427 | -103.43 | 0.868 | 7.68                     |
| 3.500            | 0.670 | 141.05  | 1.075  | 29.73  | 0.266 | 71.32 | 0.463 | -112.30 | 0.808 | 6.07                     |
| 4.000            | 0.672 | 130.96  | 0.959  | 24.15  | 0.326 | 67.81 | 0.493 | -121.04 | 0.775 | 4.69                     |
| 4.500            | 0.671 | 120.95  | 0.870  | 19.76  | 0.387 | 62.94 | 0.518 | -130.14 | 0.778 | 3.52                     |
| 5.000            | 0.673 | 111.68  | 0.802  | 16.38  | 0.445 | 57.33 | 0.538 | -139.86 | 0.798 | 2.56                     |
| 5.500            | 0.675 | 103.60  | 0.752  | 13.83  | 0.498 | 51.29 | 0.553 | -150.11 | 0.830 | 1.79                     |
| 6.000            | 0.680 | 96.09   | 0.718  | 11.88  | 0.545 | 45.24 | 0.563 | -160.44 | 0.865 | 1.19                     |

Note:

1. Gain Calculations:



$$MAG = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } MSG = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

# NE851M03

## TYPICAL SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

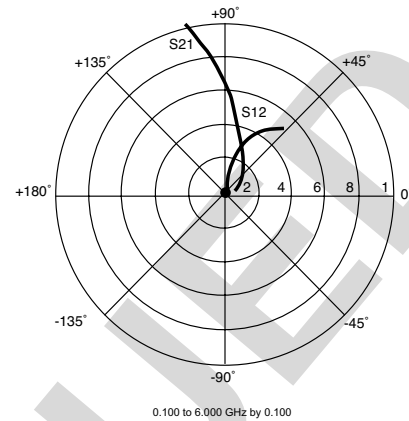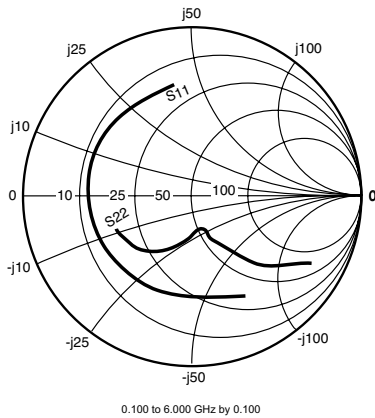

### NE851M03

V<sub>c</sub> = 2 V, I<sub>c</sub> = 10 mA

| FREQUENCY | S <sub>11</sub> |         | S <sub>21</sub> |        | S <sub>12</sub> |       | S <sub>22</sub> |         | K     | MAG <sup>1</sup> |
|-----------|-----------------|---------|-----------------|--------|-----------------|-------|-----------------|---------|-------|------------------|
| GHz       | MAG             | ANG     | MAG             | ANG    | MAG             | ANG   | MAG             | ANG     |       | (dB)             |
| 0.100     | 0.695           | -61.64  | 23.158          | 144.21 | 0.026           | 61.44 | 0.821           | -29.68  | 0.183 | 29.48            |
| 0.200     | 0.624           | -100.58 | 17.024          | 122.63 | 0.038           | 50.73 | 0.610           | -44.71  | 0.335 | 26.51            |
| 0.300     | 0.595           | -123.61 | 12.782          | 110.30 | 0.044           | 47.67 | 0.480           | -51.39  | 0.469 | 24.63            |
| 0.400     | 0.582           | -137.95 | 10.071          | 102.30 | 0.049           | 47.72 | 0.405           | -54.57  | 0.583 | 23.13            |
| 0.500     | 0.609           | -154.61 | 8.021           | 95.02  | 0.052           | 47.72 | 0.289           | -65.42  | 0.727 | 21.91            |
| 0.700     | 0.608           | -165.54 | 5.858           | 87.23  | 0.060           | 52.69 | 0.245           | -68.86  | 0.876 | 19.91            |
| 1.000     | 0.608           | -175.12 | 4.192           | 78.55  | 0.075           | 59.31 | 0.226           | -72.02  | 0.984 | 17.48            |
| 1.100     | 0.610           | -177.63 | 3.830           | 76.03  | 0.080           | 61.10 | 0.223           | -73.72  | 1.005 | 16.36            |
| 1.200     | 0.609           | -179.89 | 3.528           | 73.70  | 0.086           | 62.79 | 0.221           | -75.21  | 1.026 | 15.15            |
| 1.300     | 0.608           | 178.01  | 3.271           | 71.35  | 0.091           | 64.04 | 0.223           | -77.34  | 1.039 | 14.33            |
| 1.400     | 0.608           | 176.04  | 3.057           | 69.13  | 0.097           | 65.34 | 0.226           | -78.57  | 1.044 | 13.69            |
| 1.500     | 0.608           | 174.19  | 2.866           | 66.99  | 0.104           | 66.51 | 0.229           | -80.20  | 1.045 | 13.12            |
| 1.600     | 0.609           | 172.64  | 2.703           | 64.95  | 0.110           | 67.27 | 0.232           | -81.76  | 1.043 | 12.63            |
| 1.700     | 0.609           | 170.81  | 2.556           | 62.92  | 0.117           | 68.13 | 0.237           | -83.43  | 1.040 | 12.18            |
| 1.800     | 0.608           | 169.29  | 2.429           | 60.94  | 0.124           | 68.82 | 0.241           | -85.04  | 1.033 | 11.81            |
| 1.900     | 0.607           | 167.57  | 2.313           | 59.01  | 0.131           | 69.46 | 0.247           | -86.60  | 1.027 | 11.45            |
| 2.000     | 0.606           | 166.16  | 2.211           | 57.16  | 0.138           | 70.00 | 0.252           | -88.61  | 1.023 | 11.11            |
| 2.100     | 0.607           | 164.68  | 2.115           | 55.16  | 0.146           | 70.12 | 0.258           | -90.25  | 1.011 | 10.96            |
| 2.200     | 0.606           | 163.12  | 2.031           | 53.46  | 0.154           | 70.56 | 0.266           | -91.95  | 0.999 | 11.21            |
| 2.300     | 0.605           | 161.63  | 1.954           | 51.71  | 0.162           | 70.80 | 0.271           | -93.42  | 0.990 | 10.82            |
| 2.400     | 0.606           | 160.05  | 1.884           | 50.01  | 0.170           | 70.94 | 0.278           | -94.93  | 0.979 | 10.45            |
| 2.500     | 0.606           | 158.52  | 1.821           | 48.31  | 0.178           | 70.87 | 0.285           | -96.56  | 0.966 | 10.10            |
| 2.600     | 0.605           | 156.89  | 1.760           | 46.64  | 0.186           | 70.86 | 0.291           | -98.07  | 0.957 | 9.75             |
| 2.700     | 0.606           | 155.28  | 1.706           | 44.97  | 0.196           | 70.87 | 0.299           | -99.75  | 0.941 | 9.41             |
| 2.800     | 0.604           | 153.71  | 1.654           | 43.40  | 0.205           | 70.66 | 0.306           | -101.10 | 0.931 | 9.08             |
| 2.900     | 0.603           | 151.89  | 1.605           | 41.82  | 0.214           | 70.49 | 0.314           | -102.50 | 0.922 | 8.76             |
| 3.000     | 0.604           | 150.23  | 1.561           | 40.28  | 0.223           | 69.98 | 0.321           | -104.02 | 0.907 | 8.45             |
| 3.500     | 0.602           | 141.17  | 1.375           | 33.08  | 0.272           | 68.05 | 0.357           | -111.13 | 0.862 | 7.04             |
| 4.000     | 0.604           | 131.89  | 1.233           | 26.63  | 0.323           | 64.75 | 0.391           | -118.23 | 0.823 | 5.81             |
| 4.500     | 0.607           | 122.66  | 1.119           | 20.91  | 0.376           | 60.65 | 0.421           | -126.11 | 0.805 | 4.73             |
| 5.000     | 0.614           | 114.03  | 1.026           | 15.94  | 0.428           | 55.85 | 0.448           | -134.94 | 0.799 | 3.80             |
| 5.500     | 0.625           | 106.41  | 0.949           | 11.68  | 0.477           | 50.70 | 0.471           | -144.72 | 0.805 | 2.99             |
| 6.000     | 0.638           | 99.10   | 0.887           | 8.19   | 0.523           | 45.37 | 0.489           | -154.78 | 0.821 | 2.30             |

Note:



1. Gain Calculations:

$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} (K \pm \sqrt{K^2 - 1}). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

TYPICAL SCATTERING PARAMETERS (TA = 25°C)

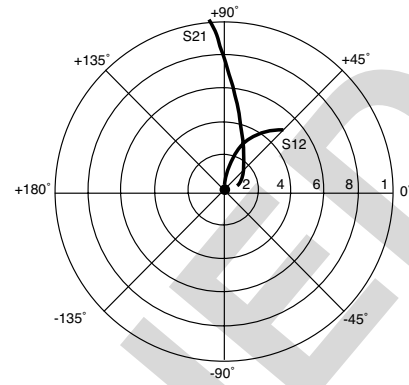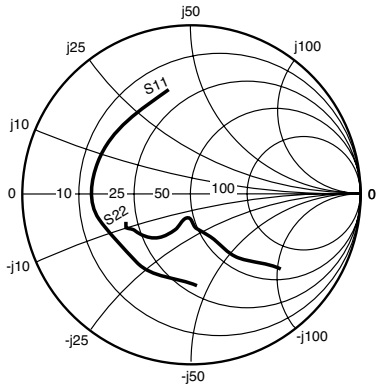

NE851M03

Vc = 3 V, Ic = 20 mA

| FREQUENCY | S11   |         | S21    |        | S12   |       | S22   |         | K     | MAG <sup>1</sup> |
|-----------|-------|---------|--------|--------|-------|-------|-------|---------|-------|------------------|
| GHz       | MAG   | ANG     | MAG    | ANG    | MAG   | ANG   | MAG   | ANG     |       | (dB)             |
| 0.100     | 0.555 | -83.93  | 33.100 | 134.57 | 0.020 | 59.16 | 0.705 | -40.19  | 0.304 | 32.17            |
| 0.200     | 0.525 | -123.08 | 21.477 | 114.01 | 0.028 | 53.63 | 0.469 | -55.38  | 0.529 | 28.79            |
| 0.300     | 0.519 | -141.74 | 15.332 | 103.82 | 0.035 | 55.51 | 0.355 | -61.29  | 0.680 | 26.43            |
| 0.400     | 0.518 | -152.59 | 11.824 | 97.41  | 0.040 | 58.95 | 0.295 | -63.99  | 0.790 | 24.68            |
| 0.500     | 0.570 | -165.20 | 9.286  | 91.94  | 0.045 | 60.56 | 0.203 | -82.72  | 0.896 | 23.15            |
| 0.700     | 0.572 | -173.28 | 6.730  | 85.52  | 0.058 | 64.80 | 0.170 | -87.94  | 0.977 | 20.68            |
| 1.000     | 0.573 | 179.45  | 4.793  | 78.07  | 0.078 | 68.73 | 0.156 | -90.92  | 1.020 | 17.03            |
| 1.100     | 0.574 | 177.46  | 4.376  | 75.85  | 0.085 | 69.69 | 0.154 | -92.65  | 1.024 | 16.18            |
| 1.200     | 0.573 | 175.59  | 4.030  | 73.81  | 0.092 | 70.12 | 0.153 | -93.73  | 1.032 | 15.34            |
| 1.300     | 0.573 | 173.85  | 3.736  | 71.72  | 0.099 | 70.66 | 0.156 | -95.63  | 1.033 | 14.66            |
| 1.400     | 0.572 | 172.20  | 3.490  | 69.72  | 0.106 | 71.00 | 0.159 | -96.09  | 1.031 | 14.09            |
| 1.500     | 0.572 | 170.60  | 3.272  | 67.80  | 0.113 | 71.20 | 0.162 | -97.01  | 1.030 | 13.54            |
| 1.600     | 0.571 | 169.35  | 3.086  | 65.92  | 0.121 | 71.30 | 0.164 | -97.84  | 1.027 | 13.07            |
| 1.700     | 0.571 | 167.72  | 2.918  | 64.09  | 0.129 | 71.48 | 0.169 | -98.85  | 1.022 | 12.65            |
| 1.800     | 0.570 | 166.42  | 2.772  | 62.29  | 0.136 | 71.38 | 0.173 | -99.61  | 1.018 | 12.28            |
| 1.900     | 0.568 | 164.85  | 2.641  | 60.52  | 0.144 | 71.29 | 0.177 | -100.52 | 1.015 | 11.89            |
| 2.000     | 0.567 | 163.64  | 2.524  | 58.79  | 0.152 | 71.21 | 0.182 | -101.75 | 1.010 | 11.61            |
| 2.100     | 0.566 | 162.32  | 2.415  | 56.94  | 0.160 | 71.07 | 0.188 | -102.94 | 1.004 | 11.40            |
| 2.200     | 0.566 | 160.87  | 2.321  | 55.35  | 0.167 | 70.95 | 0.194 | -103.84 | 0.997 | 11.42            |
| 2.300     | 0.564 | 159.57  | 2.233  | 53.71  | 0.176 | 70.63 | 0.200 | -104.57 | 0.990 | 11.04            |
| 2.400     | 0.564 | 158.12  | 2.155  | 52.12  | 0.184 | 70.33 | 0.205 | -105.29 | 0.982 | 10.69            |
| 2.500     | 0.563 | 156.71  | 2.082  | 50.51  | 0.192 | 69.89 | 0.212 | -106.25 | 0.974 | 10.35            |
| 2.600     | 0.562 | 155.22  | 2.013  | 48.91  | 0.200 | 69.69 | 0.218 | -107.15 | 0.968 | 10.02            |
| 2.700     | 0.562 | 153.77  | 1.953  | 47.33  | 0.209 | 69.30 | 0.225 | -108.26 | 0.958 | 9.70             |
| 2.800     | 0.559 | 152.31  | 1.895  | 45.82  | 0.218 | 68.85 | 0.231 | -108.94 | 0.952 | 9.39             |
| 2.900     | 0.558 | 150.61  | 1.840  | 44.30  | 0.227 | 68.41 | 0.238 | -109.85 | 0.946 | 9.10             |
| 3.000     | 0.558 | 149.11  | 1.791  | 42.79  | 0.235 | 67.76 | 0.245 | -110.73 | 0.937 | 8.82             |
| 3.500     | 0.554 | 140.64  | 1.583  | 35.66  | 0.280 | 65.12 | 0.280 | -115.50 | 0.903 | 7.52             |
| 4.000     | 0.555 | 132.00  | 1.426  | 29.06  | 0.327 | 61.75 | 0.313 | -120.66 | 0.870 | 6.39             |
| 4.500     | 0.558 | 123.35  | 1.300  | 22.97  | 0.374 | 57.82 | 0.345 | -127.21 | 0.850 | 5.41             |
| 5.000     | 0.567 | 115.32  | 1.196  | 17.43  | 0.421 | 53.51 | 0.374 | -134.94 | 0.834 | 4.54             |
| 5.500     | 0.581 | 108.18  | 1.109  | 12.40  | 0.465 | 48.92 | 0.400 | -143.93 | 0.826 | 3.77             |
| 6.000     | 0.599 | 101.26  | 1.034  | 7.97   | 0.507 | 44.18 | 0.423 | -153.49 | 0.828 | 3.09             |

Note:

1. Gain Calculations:

$$MAG = \frac{|S_{21}|}{|S_{12}|} \left( K \pm \sqrt{K^2 - 1} \right). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } MSG = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

**CEL** California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.

4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • www.cel.com


DATA SUBJECT TO CHANGE WITHOUT NOTICE

09/02/2003



**NONLINEAR MODEL**

**SCHEMATIC**

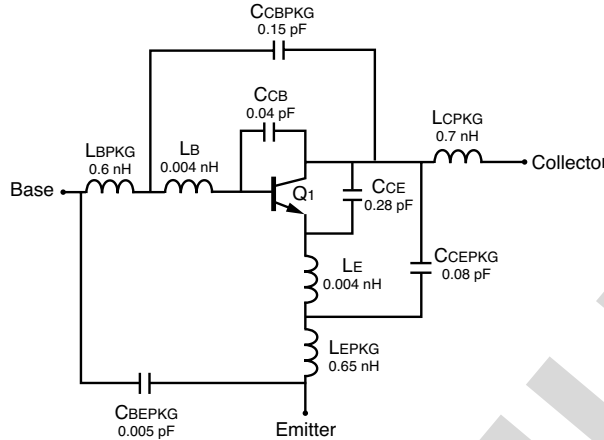

**BJT NONLINEAR MODEL PARAMETERS<sup>(1)</sup>**

| Parameters | Q1        | Parameters | Q1     |
|------------|-----------|------------|--------|
| IS         | 734.5e-18 | MJC        | 0.122  |
| BF         | 166.6     | XCJC       | 0.1    |
| NF         | 1.00      | CJS        | 0      |
| VAF        | 41        | VJS        | 0.75   |
| IKF        | 0.597     | MJS        | 0      |
| ISE        | 39.37e-15 | FC         | 0.5    |
| NE         | 2.258     | TF         | 13e-12 |
| BR         | 28.67     | XTF        | 0.39   |
| NR         | 1.000     | VTF        | 0.668  |
| VAR        | 2.541     | ITF        | 0.06   |
| IKR        | 23.22e-3  | PTF        | 20     |
| ISC        | 27.52e-18 | TR         | 0      |
| NC         | 2.0       | EG         | 1.11   |
| RE         | 1.7       | XTB        | 0      |
| RB         | 3.0       | XTI        | 3      |
| RBM        | 1.0       | KF*        | 0      |
| IRB        | 759e-6    | AF*        | 1      |
| RC         | 4.0       |            |        |
| CJE        | 2.51e-12  |            |        |
| VJE        | 0.887     |            |        |
| MJE        | 0.332     |            |        |
| CJC        | 498.2e-15 |            |        |
| VJC        | 0.367     |            |        |

(1) Gummel-Poon Model

**ADDITIONAL PARAMETERS**

| Parameters | NE851M03 |
|------------|----------|
| CCB        | 0.04 pF  |
| CCE        | 0.28 pF  |
| LB         | 0.004 nH |
| LE         | 0.004 nH |
| CCBPKG     | 0.15 pF  |
| CCEPKG     | 0.08 pF  |
| CBEPKG     | 0.005 pF |
| LBPKG      | 0.6 nH   |
| LCPKG      | 0.7 nH   |
| LEPKG      | 0.65 nH  |

AF and KF are 1/f noise parameters and are bias dependent. The appropriate values for the 1/f noise parameters (AF and KF) shall be chosen from the table below, according to the desired current range.

|           | Ic = 5 mA | Ic = 10 mA | Ic = 15 mA |
|-----------|-----------|------------|------------|
| <b>AF</b> | 1.40      | 2.551      | 2.626      |
| <b>KF</b> | 4.547e-15 | 855.6e-12  | 1.735e-9   |

For a better understanding on AF and KF parameters, please refer to AN1026.

**MODEL TEST CONDITIONS**

Frequency: 0.1 to 6.0 GHz  
 Bias: VCE = 1.5 V, Ic = 1 mA to 9 mA  
 Date: 09/2003

**Life Support Applications**

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

**CEL** California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.

4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • [www.cel.com](http://www.cel.com)

DATA SUBJECT TO CHANGE WITHOUT NOTICE

09/02/2003

**NEC**  
 A Business Partner of NEC Compound Semiconductor Devices, Ltd.

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (\*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

| Restricted Substance per RoHS | Concentration Limit per RoHS (values are not yet fixed) | Concentration contained in CEL devices |     |
|-------------------------------|---|--|-----|
|                               |   | -A                                     | -AZ |
| Lead (Pb)                     | < 1000 PPM  | Not Detected                           | (*) |
| Mercury                       | < 1000 PPM  | Not Detected                           |     |
| Cadmium                       | < 100 PPM   | Not Detected                           |     |
| Hexavalent Chromium           | < 1000 PPM  | Not Detected                           |     |
| PBB                           | < 1000 PPM  | Not Detected                           |     |
| PBDE                          | < 1000 PPM  | Not Detected                           |     |

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

**Important Information and Disclaimer:** Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL's liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.