

SMT Power Inductors

Flat Coils - PG0434NL Series



- Height:** 6.5mm Max
- Footprint:** 14.5mm x 13.0mm Max
- Current Rating:** up to 58A
- Inductance Range:** 0.14μH to 2.65μH
- RoHS compliant
- High temperature core material; no thermal aging below 150°C

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

| Part ⁸ Number | Inductance ² @ I _{rated} (μH TYP) | I _{rated} ³ (A) | DCR (mΩ) | | Inductance @0ADC (μH ±20%) | Saturation ⁴ Current I _{sat} (A) | Heating ⁵ Current I _{bc} (A) | Core Loss ⁶ Factor K ₂ |
|-----------------------------|---|--|----------|------|----------------------------------|--|--|--|
| | | | TYP | MAX | | | | |
| PG0434.181NL | 0.15 | 58 | 0.45 | 0.50 | 0.18 | 60 | 58 | 22.3 |
| PG0434.401NL | 0.37 | 45 | 0.75 | 0.80 | 0.45 | 48 | 45 | 33.5 |
| PG0434.801NL | 1.66 | 35 | 1.20 | 1.30 | 0.80 | 38 | 35 | 42.5 |
| PG0434.142NL * | 1.12 | 27 | 2.00 | 2.10 | 1.40 | 28 | 27 | 57.8 |
| PG0434.202NL * | 1.64 | 23 | 2.80 | 2.90 | 2.00 | 24 | 23 | 67.6 |
| PG0434.282NL | 2.24 | 19 | 4.10 | 4.20 | 2.80 | 20 | 19 | 80.1 |

Notes:

- The temperature of the component (ambient plus temperature rise) must be within the standard operating temperature range.
- Inductance at I_{rated} is a typical inductance value for the component taken at rated current.
- The rated current listed is the lower of the saturation current @ 25°C or the heating current.
- The saturation current, I_{SAT}, is the current at which the component inductance drops by 20% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current, I_{bc}, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the component's performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Core Loss approximation is based on published core data:






$$\text{Core Loss} = K1 * (f)^{1.33} * (K2 \Delta I)^{2.51}$$
Where: Core Loss = in Watts
 K1 = 1.05E-10
 f = switching frequency in kHz
 K1 & K2 = core loss factors
 ΔI = delta I across the component in Ampere
 K2ΔI = one half of the peak to peak flux density across the component in Gauss
- Unless otherwise specified, all testing is made at 100kHz, 0.1V_{AC}.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG0077.401NL becomes PG0077.401NLT). Pulse complies to industry standard tape and reel specification EIA481.

* Contact Pulse for availability


Mechanical

Schematic

PG0434.XXXNL

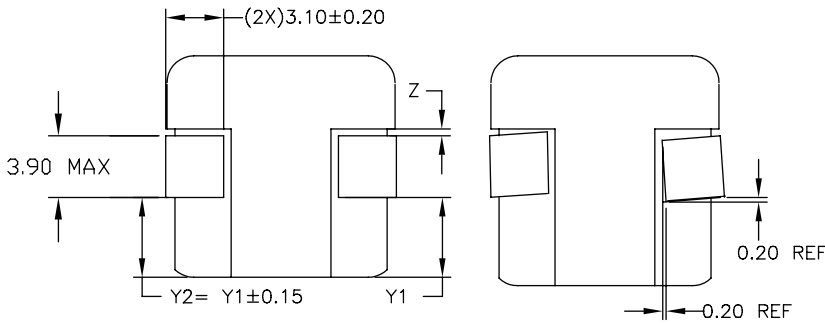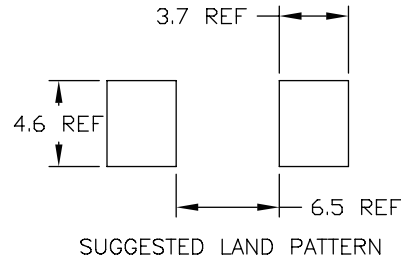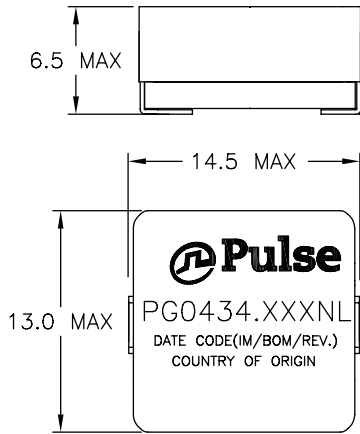

| PART NUMBER | Y1 in MM | Z in MM REF. |
|--------------|-----------|--------------|
| PG0434.181NL | 4.65±0.40 | 0.65 |
| PG0434.401NL | 4.65±0.40 | 0.65 |
| PG0434.801NL | 4.65±0.40 | 0.65 |
| PG0434.142NL | 5.20±0.40 | 1.20 |
| PG0434.202NL | 5.20±0.40 | 1.20 |
| PG0434.282NL | 5.20±0.40 | 1.20 |
| PG0434.222NL | 5.20±0.40 | 1.20 |

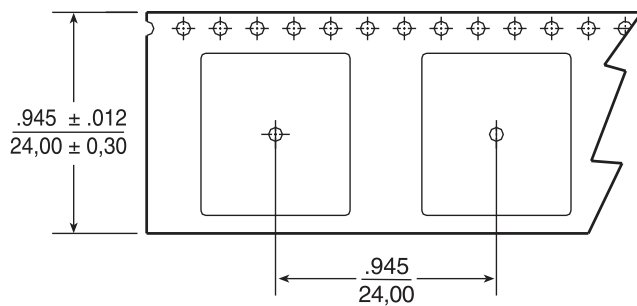

TAPE & REEL LAYOUT


Weight5.5 grams

Tape & Reel300/reel


Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Typical Inductance vs Current Characteristics @ 25°C

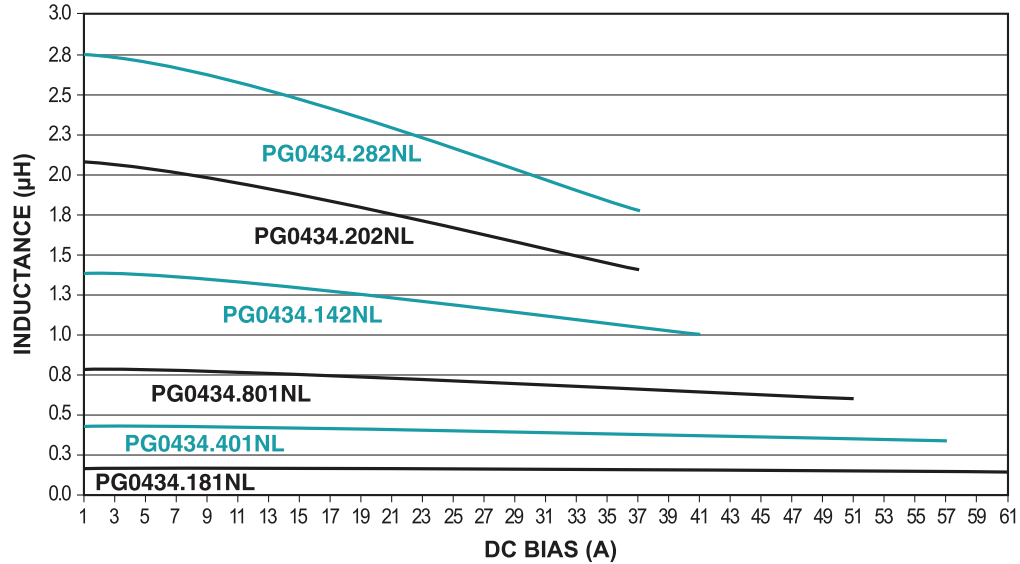

Typical Core Loss vs Peak Flux Density

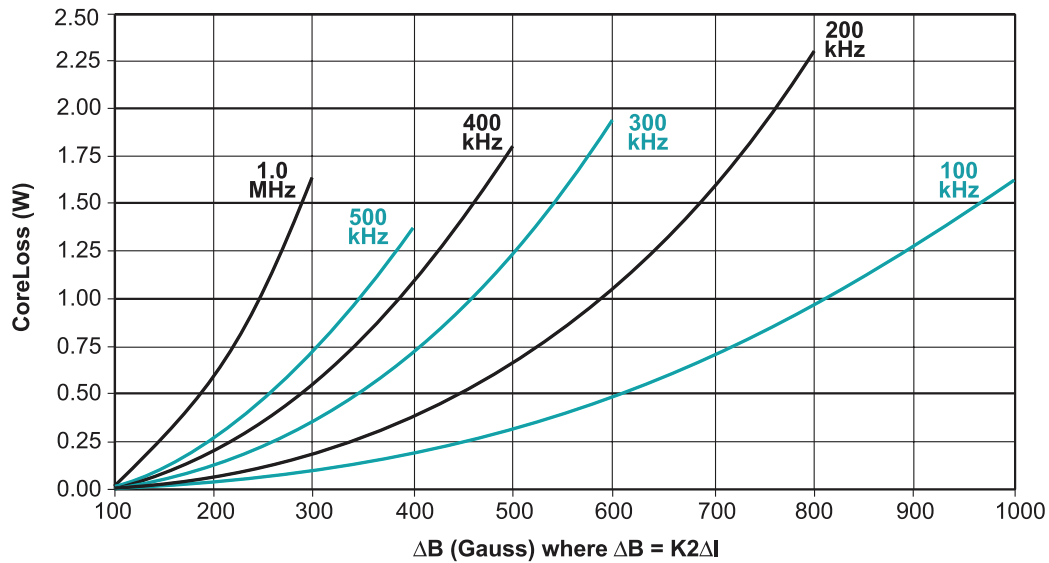

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen, P.R.
China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Pulse North Asia

1F., No.111 Xiyuan Rd
Zhongli City
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 21 62786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2017. Pulse Electronics, Inc. All rights reserved.