## LED RGB CONTROLLER

The LED RGB Controller is designed for LED lighting color control. It can control modules, LED ribbons, LED bars, High Power LED modules and other LED lighting fixtures.

## **FEATURES**

- Power Off Memory
- 11 Control Modes

RELEASE AND CANCEL PL-0901-03

DESCRIPTION/ECO

NUMBER

- Rate Control for Cycling Color Changes and Brightness Control
- Common Anode CMOS Outputs
- Operates up to 8 JKL LED Light Bars, reference P/N ZRS-10573-RGB




## **RATINGS**

CHARACTERISTICS	UNIT	MINIMUM	TYPICAL	MAXIMUM
Input Voltage	Volts DC		12	
Load Current	Amps		4	6
Operating Temperature	degrees C	-20		60

## **MODES**

MODE #	TITLE	DESCRIPTION	
1	Static Red	The "R" output is constantly ON	
2	Static Blue	The "B" output is constantly ON	
3	Static Violet	The "R and G" output is constantly ON	
4	Static Green	The "G" output is constantly ON	
5	Static Yellow	The "R and G" outputs are constantly ON	
6	Static Cyan	The "G, and B" outputs are constantly ON	
7	Static White	The "R, G, and B" outputs are constantly ON	
8	Flash Cycle #1	The "R, B, and G" outputs go ON and OFF in order	
9	Flash Cycle #2	All the static colors come ON and OFF in a sequence	
10	Gradual Cycle #1	The "R, G, and B" output go ON and OFF in order with overlap between colors (Brightness adjust Not Available)	
11	Gradual Cycle #2	All the static colors come ON and OFF in a sequence with overlap between colors (Brightness adjust Not Available)	

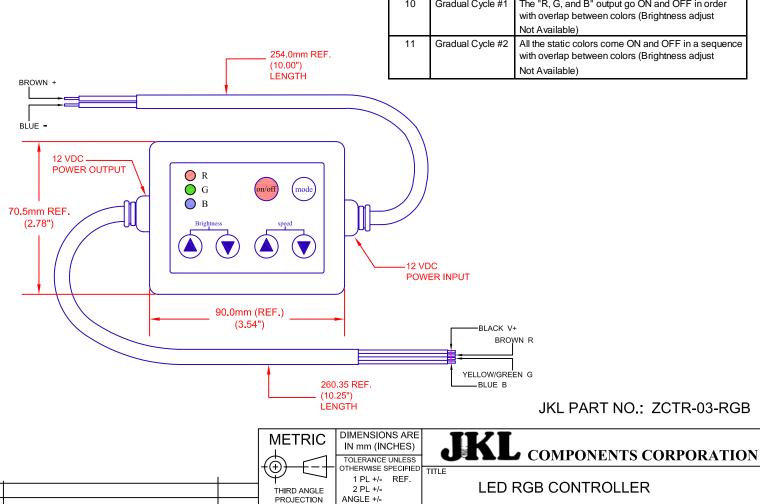

APPV'D BY

- CAD DRAWING -

MANUAL REVISIONS NOT PERMITTED

DRAWN BY

5/7/09

APPV'D DATE L WENGSTROM L.R.

FSCM NO.

55335

NONE

Α

SCALE

5/7/09

DRAWING

NO.

DATE

ZCTR-03-RGB

SHEET

1 OF 1

NO.

REVISION

DATE

5/7/09