

1

2

3




4

5

6

7

Male

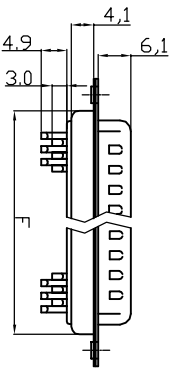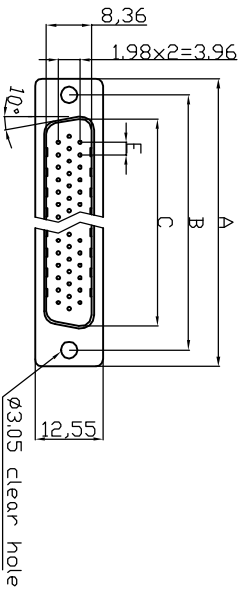

Product Specification

Material
 Insulator : Glass-Filled Thermoplastic PBT, UL94V-0 rated, Black
 Contact : Copper alloy, Gold flash selective gold plating
 Shell : Steel, 100u" Tin Over 50u" min Copper


Electrical

Contact Resistance :20 milliohms Max at 1 AMP DC.
 Insulation Resistance :1000megohms at 500 VDC
 Dielectric Withstanding Voltage :1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3 AMP
 Voltage Rating :250 VAC/rms 60Hz
 ① Durability :250 mating cycles
 Operating Temperature : -20°C ~ +85°C
 Order Code:
 A-HDX xx LLZ


Contact style: No. of Contacts
 F - Female 15 / 26 / 44 / 62
 S - Male

Dimensions

Positions	A	B	C	E	F
15	30.81	24.99	16.92	2.29	19.20
26	39.20	33.30	25.25	2.29	27.70
44	53.04	47.04	38.96	2.29	41.10
62	69.40	63.50	55.42	2.41	57.30

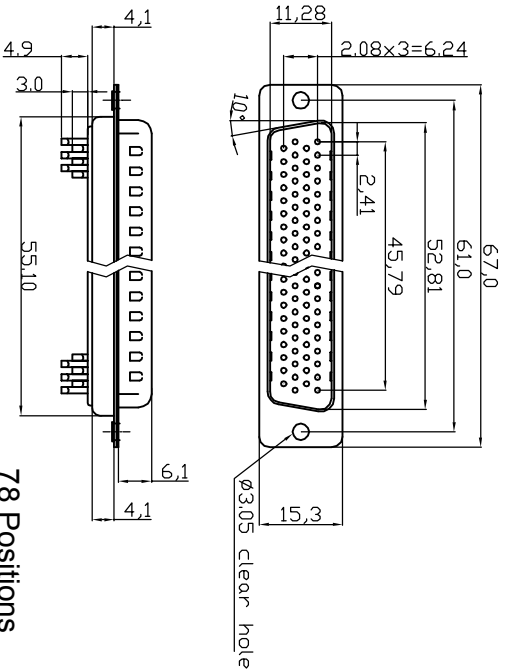

78 Positions



ROHS compliant

Unit: mm



File No.: E198287

Scale	Free
TOLERANCE	
X.	±0.38
X.X	±0.25
X.XX	±0.13
DIM	TOL
X.°	±3°
X.X°	±1.0°
Angle	TOL

Id.	Modification	Date	Name
①	Add the mating cycles	19.10.2017	Winnie
②	Drawn	15.08.2012	Lucas

Date	Name
15.08.2012	Lucas
19.10.2017	Winnie



Customer-No.
 ASSMANN WSW-No.
A-HDX xx LLZ
 Drawing-No.
ASS 4895 CO

Replace
rev01
 Sheet
 1/2

1

2

3

4

5

6

7

H

G

F

E

D

C

B

A

1

2

3



4

5

6

7

Female

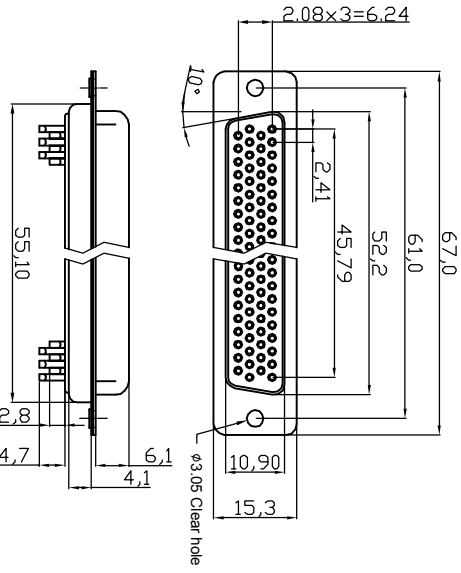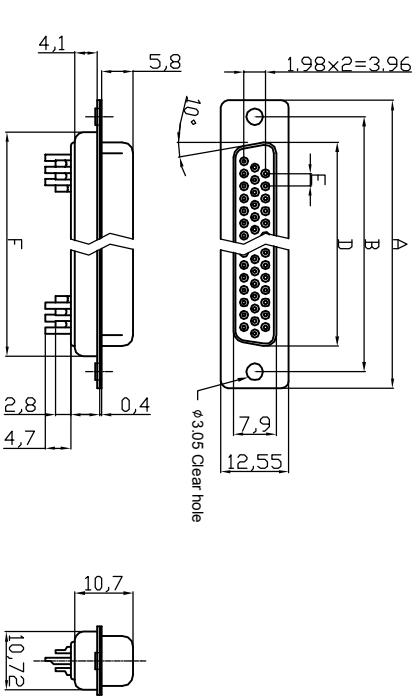

78 Positions

Dimensions


Positions	A	B	D	E	F
15	30.81	24.99	16.33	2.29	19.20
26	39.20	33.30	24.70	2.29	27.70
44	53.05	47.04	38.40	2.29	41.10
62	69.40	63.50	54.80	2.41	57.30

NOTES:

MATERIAL
 Insulator Material: Glass-filled thermoplastic PBT, UL 94V-0 rated, Black
 Contact Material: Copper alloy, Gold flash selective gold plating
 Shell :Steel, 100 µ" Tin Over 50µ" min Copper

Electrical
 Contact Resistance :20 milliohms Max at 1 AMP DC.
 Insulation Resistance : 1000megohms at 500 VDC
 Dielectric Withstanding Voltage:1000 VAC/rms 60Hz for 1 minute
 Current Rating :3 AMP
 Durability :250 mating cycles
 Volage Rating :250 VAC/rms 60Hz
 Operating Temperature: -20°C+85°C

ROHS compliant
 Unit: mm



File No.: E198287

Scale	Free				
TOLERANCE					
X.	±0.38				
X.X	±0.25				
X.XX	±0.13				
DIM					
X.°	±3°	①	Add the mating cycles	19.10.2017	Winnie
X.X°	±1.0°	②	Drawn	15.08.2012	Lucas
Angle	TOL	Id.	Modification	Date	Name

Date	Name	Customer-No.
Drawn	Lucas	
Approved	Winnie	

ASSMANN WSW-No. **A-HDX XX LL/Z**

Drawing-No. **ASS 4895 CO**

Replace **rev01**

Sheet 2/2



1

2

3

4

5

6

7

H

G

F

E

D

C

B

A