






HDMI M- HDMI M

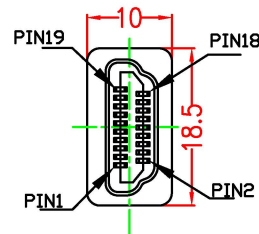


HDMI 19P MALE

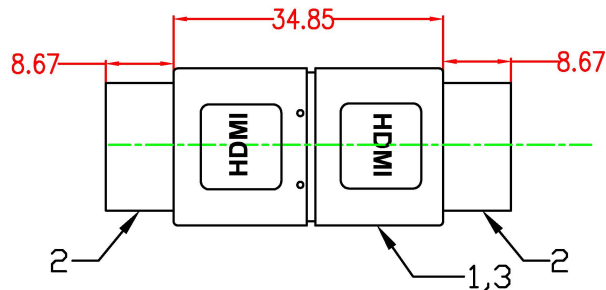

HDMI 19P MALE

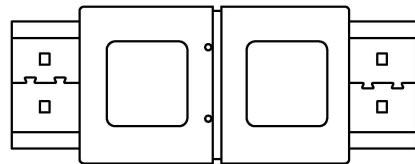

DUST COVER



DUST COVER



REACH SVHC176

PIN ASSENGMENT

HDMI 19M		HDMI 19M
3		3 (TMDS Data 2-)
1		1 (TMDS Data 2+)
2		2 (TMDS Data 2 Shield)
6		6 (TMDS Data 1-)
4		4 (TMDS Data 1+)
5		5 (TMDS Data 1 Shield)
9		9 (TMDS Data 0-)
7		7 (TMDS Data 0+)
8		8 (TMDS Data 0 Shield)
12		12 (TMDS Clock -)
10		10 (TMDS Clock +)
11		11 (TMDS Clock Shield)
18		18 (+5V Power)
17		17 (Ground)
15		15 (DCC Clock)
16		16 (DCC Data)
19		19 (Hot Plug Detect)
13		13 (CEC)
14		14 NO FUNCTION
SHELL		SHELL

ELECTRICAL PROPERTIES:

- 100% OPEN SHORT MIS-WIRE TEST
- CONTACT RESISTANCE:10Ω
- INSULATION RESISTANCE:5MΩ
- HIPOT TEST:DC 300V/10MS

No.	DESCRIPTION	UNIT	Q'TY
3	PVC 45P MOLDED BLACK IN COLOR	PCS	1
2	HDMI 19PIN MALE SOLDER TYPE CONTACT PLATED,NICKEL	PCS	2
1	INTERNAL WIRES,UL1007 30AWG 7STRAND	PCS	20

REV.	DESCRIPTION	DATE
A	ADAPTER HDMI A-TYPE MALE TO MALE	17/09/07

UNLESS OTHERWISE SPECIFIED TOLERANCE		DRAWN NAME: ASSMANN - AB562
ANG.	±5°	
0.	±0.5	DRAWN NO.
.0	±0.3	
.00	±0.2	PRODUCT NO.
SCALE:	NONE	
	UNIT: mm	FILE NAME:
DRAWN:	tang 17/09/07	
CHECKED:	zeng 17/09/07	
APPROVED:		
SIZE	A4	REV. A