

## SUMMARY

### # Wires

Low	20
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	5K
Termination type	Male solder
IP rating	68
Cable Ø	0.00 - 0.00 mm
Matching parts	
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	*:
Keying	2 keys (gamma=75, plug: female contacts, receptacle: male contacts)
Housing Material	Stainless steel shell, collet nut, latch sleeve, mid pieces, collet and washers
Cable Fixing	∅ 0 - 0 mm
Variant	PV : Watertight / Vacuum-tested
Weight	380.27 g

### Performance

Configuration	5K.320 : 20 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	10 Amps

### Specifications

Contact Type: Solder  
Max. Matings: 5000

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Contact Dia.: 1.6 mm (0.063in)  
Bucket Dia.: 1.4 mm (0.055in)  
Max. Solid Conductor: 1 mm<sup>2</sup> (AWG 16)  
Max. Stranded Conductor: 1 mm<sup>2</sup> (AWG 18)  
R (max): 3.5 mOhm  
Vtest (contact-shell): 1700 V (AC), 2400 V (DC)  
Vtest (contact-contact): 1900 V (AC), 2700 V (DC)


## Others

Endurance (Shell): 5000 mating cycles  
Temp (min / max): -20°C / +80°C  
Humidity (max): ≤95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Salt Spray Corrosion: >144 hr  
Climatical Category: 20/80/21  
Shielding (min): 95 dB (10 MHz)  
Shielding (min): 80 dB (1 GHz)  
R leak (He) (max): 0.0000001 mbar·l/s (if vacuum-tested)  
Pressure: 5 bars  
IP Rating: 68

---

## DRAWINGS

### Draws

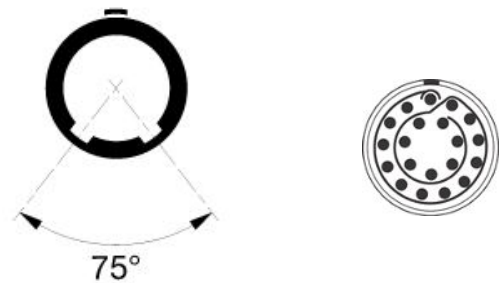

### Dimensions

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

# RECOMMENDED BY LEMO

## Tools

None

## Cables

CMN.20.T22.084PGCE	PVC	GREY	
CMN.20.T22.084PGZE		Grey	
CMN.20.T22.084PNCE	PVC	Black	
CMN.20.T22.084PNZE			
420 250	PVC	Grey	
420 500	PVC	Grey	
520 750	PVC	Grey	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.