


# Silicon Power Schottky Diode

**V<sub>RRM</sub> = 45 V - 100 V**  
**I<sub>F(AV)</sub> = 400 A**

## Features

- High Surge Capability
- Types from 45 V to 100 V V<sub>RRM</sub>
- Not ESD Sensitive

## Twin Tower Package

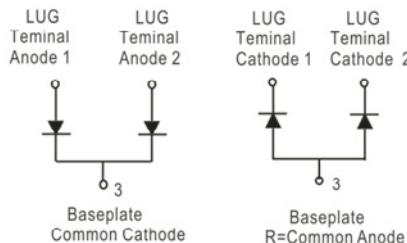

**Maximum ratings, at T<sub>j</sub> = 25 °C, unless otherwise specified ("R" devices have leads reversed)**





| Parameter                       | Symbol           | Conditions | MBR40045CT(R) | MBR40060CT(R) | MBR40080CT(R) | MBR400100CT(R) | Unit |
|---------------------------------|------------------|------------|---------------|---------------|---------------|----------------|------|
| Repetitive peak reverse voltage | V <sub>RRM</sub> |            | 45            | 60            | 80            | 100            | V    |
| RMS reverse voltage             | V <sub>RMS</sub> |            | 32            | 42            | 57            | 70             | V    |
| DC blocking voltage             | V <sub>DC</sub>  |            | 45            | 60            | 80            | 100            | V    |
| Operating temperature           | T <sub>j</sub>   |            | -55 to 150    | -55 to 150    | -55 to 150    | -55 to 150     | °C   |
| Storage temperature             | T <sub>stg</sub> |            | -55 to 150    | -55 to 150    | -55 to 150    | -55 to 150     | °C   |

**Electrical characteristics, at T<sub>j</sub> = 25 °C, unless otherwise specified**

| Parameter  | Symbol             | Conditions   | MBR40045CT(R) | MBR40060CT(R) | MBR40080CT(R) | MBR400100CT(R) | Unit |
|--|--------------------|--|---------------|---------------|---------------|----------------|------|
| Average forward current (per pkg)                      | I <sub>F(AV)</sub> | T <sub>C</sub> = 125 °C  | 400           | 400           | 400           | 400            | A    |
| Peak forward surge current (per leg)                   | I <sub>FSM</sub>   | t <sub>p</sub> = 8.3 ms, half sine   | 3000          | 3000          | 3000          | 3000           | A    |
| Maximum forward voltage (per leg)                      | V <sub>F</sub>     | I <sub>FM</sub> = 200 A, T <sub>j</sub> = 25 °C                              | 0.70          | 0.75          | 0.84          | 0.84           | V    |
| Reverse current at rated DC blocking voltage (per leg) | I <sub>R</sub>     | T <sub>j</sub> = 25 °C<br>T <sub>j</sub> = 100 °C<br>T <sub>j</sub> = 150 °C | 1<br>10<br>50 | 1<br>10<br>50 | 1<br>10<br>50 | 1<br>10<br>50  | mA   |


## Thermal characteristics

|  |                  |  |      |      |      |      |      |
|--|------------------|--|------|------|------|------|------|
| Thermal resistance, junction-case, per leg | R <sub>θJC</sub> |  | 0.35 | 0.35 | 0.35 | 0.35 | °C/W |
|--|------------------|--|------|------|------|------|------|

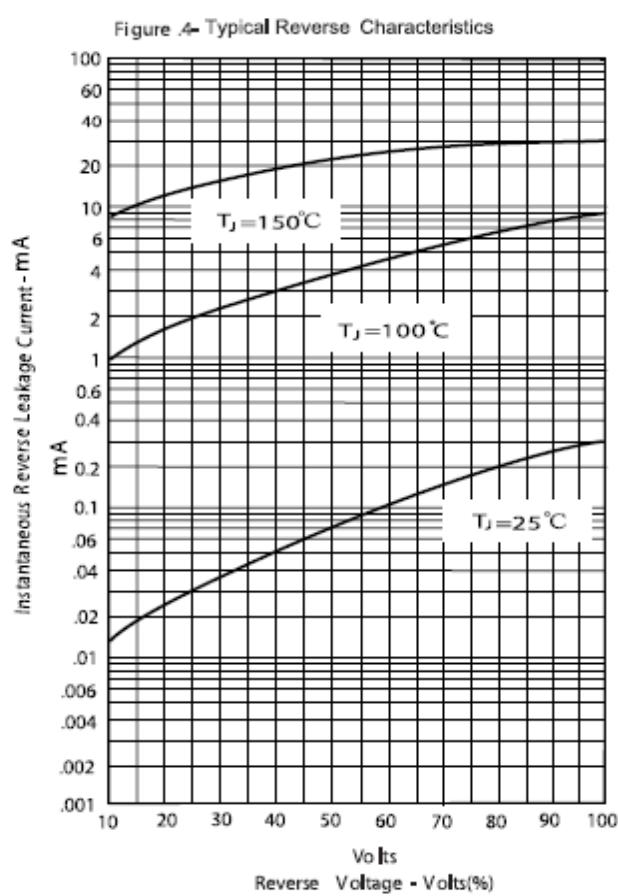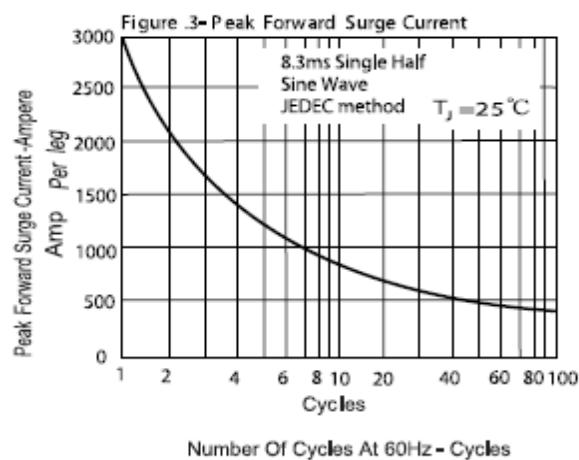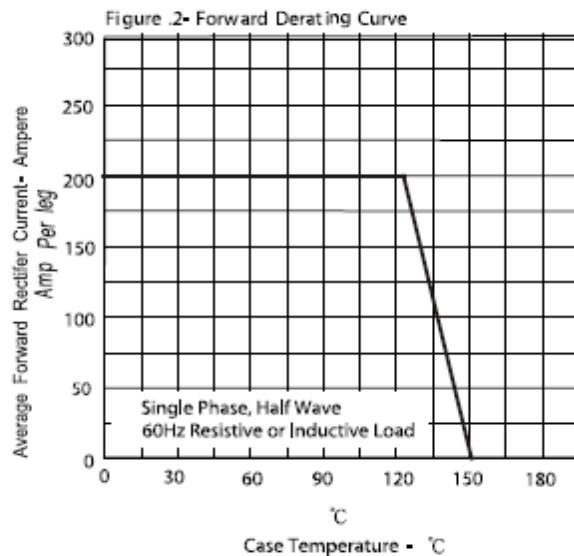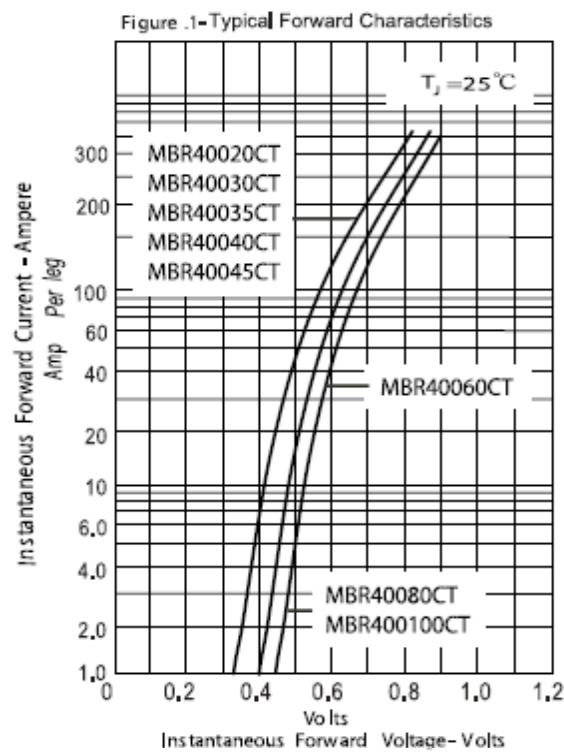

## Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

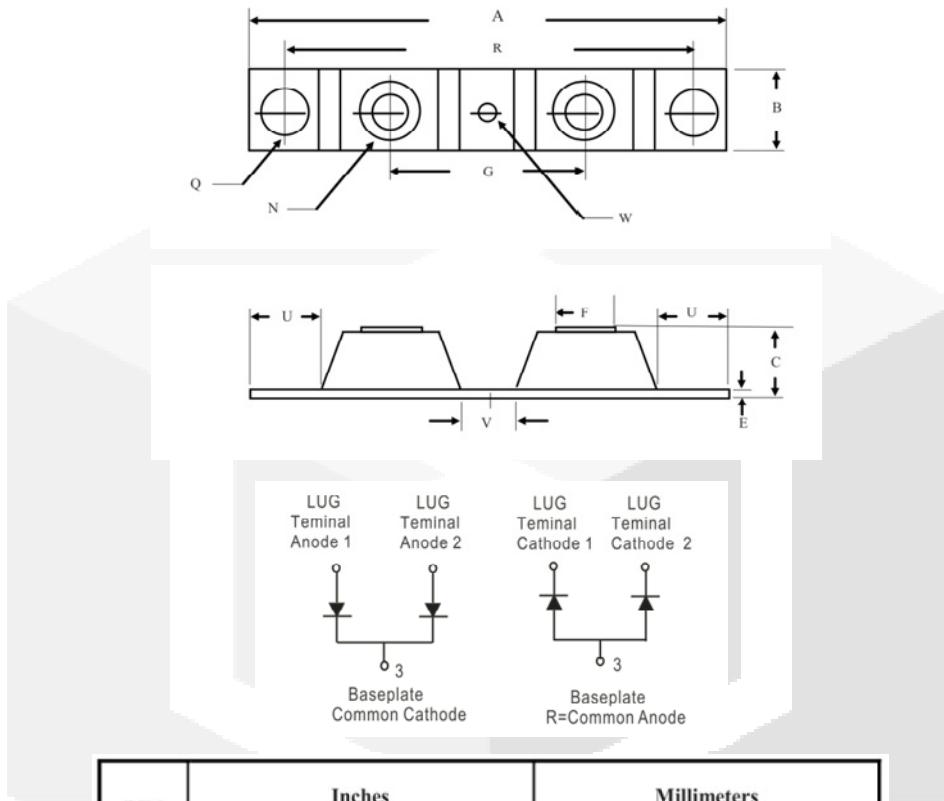

| DIM | Inches          |       | Millimeters |       |
|-----|-----------------|-------|-------------|-------|
|     | Min             | Max   | Min         | Max   |
| A   | -----           | 3.638 | -----       | 92.40 |
| B   | 0.700           | 0.800 | 17.78       | 20.32 |
| C   | -----           | 0.650 | -----       | 16.51 |
| E   | 0.130           | 0.141 | 3.30        | 3.60  |
| F   | 0.482           | 0.490 | 12.25       | 12.45 |
| G   | 1.368           | BSC   | 34.75       | BSC   |
| N   | 1/4-20 UNC FULL |       |             |       |
| Q   | 0.275           | 0.290 | 6.99        | 7.37  |
| R   | 3.150           | BSC   | 80.01       | BSC   |
| U   | 0.600           | ----- | 15.24       | ----- |
| V   | 0.312           | 0.370 | 7.92        | 9.40  |
| W   | 0.180           | 0.195 | 4.57        | 4.95  |