

date 09/05/2017

page 1 of 4

SERIES: MD-SMK | DESCRIPTION: MINI DIN CONNECTOR


FEATURES

- PCB mount
- right angle
- side shielded with kinked pins





PART NUMBER KEY




SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
rated input voltage			100 12		Vac Vdc
rated input current	at 100 Vac at 12 Vdc			1 2	A A
contact resistance				30	mΩ
insulation resistance	at 250 Vdc	50			МΩ
voltage withstand	for 1 minute			250	Vac
insertion force		1		4.5	kg
withdrawal force		0.8		3	kg
operating temperature		-40		85	°C
life			1,000		cycles
flammability rating	UL94V-0				
RoHS	2011/65/EU				

MECHANICAL DRAWINGS












MATERIAL	PLATING
brass	tin
phosphor bronze	silver
steel	tin
PBT	
	brass phosphor bronze steel












PCB LAYOUT TOP VIEW


MD-40SMK






MD-50SMK





MECHANICAL DRAWINGS (CONTINUED)

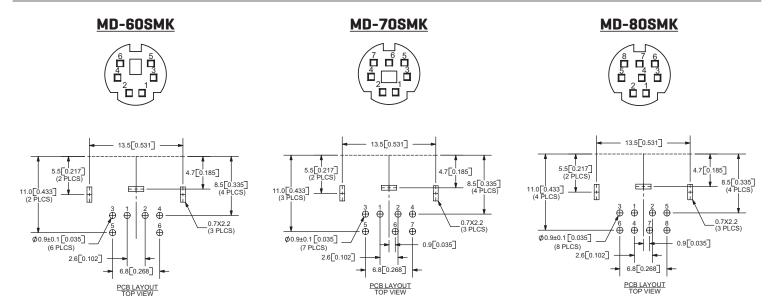

REVISION HISTORY

rev.	description	date
1.0	initial release	02/23/2006
1.01	new template applied	02/22/2012
1.02	updated datasheet	09/05/2017

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 800.275.4899

Fax 503.612.2383 cui.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.