




| REV. | DESCRIPTION | DATE |
|------|-------------------------------|-----------|
| A | NEW DRAWING | 3/10/2006 |
| B | Added tolerances | 8/17/2006 |
| C | Updated operating temperature | 8/7/2017 |

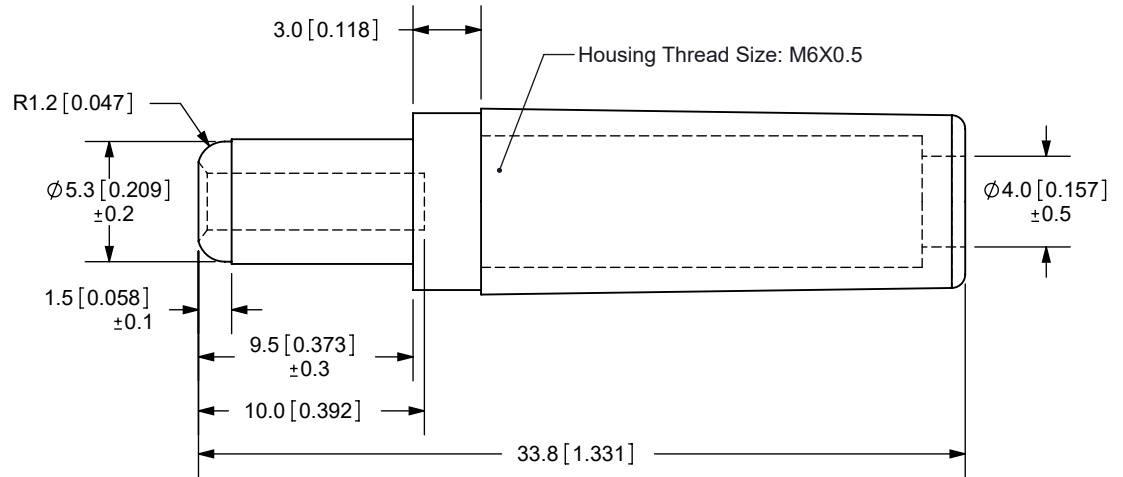

SCALE 1:1

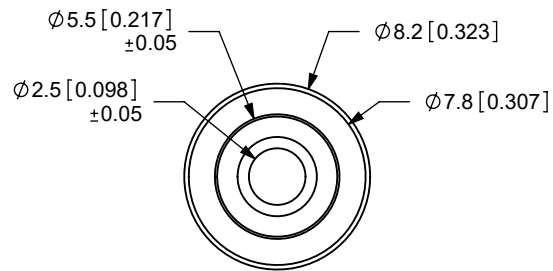

SPECIFICATIONS:
 RATING: 24V DC @ 5A
 OPERATING TEMP: -25~70°C

| | MATERIAL | PLATING |
|-----------|----------|-------------|
| BARREL | Brass | Nickel |
| INSULATOR | POM | Black Color |
| HOUSING | ABS | |

TOLERANCE:
 ±0.2mm UNLESS OTHERWISE
 SPECIFIED



CUI INC

20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com

| | | |
|-------------------|--------------------|------------|
| TITLE: DC PLUG | | REV: C |
| PART NO. PP3-002B | UNITS: MM [INCHES] | |
| DRAWN BY: RDS | APPROVED BY: | SCALE: 3:1 |

PC FILE NAME:
 PP3-002B

COPYRIGHT 2007 BY CUI INC.