

## SUMMARY

### # Wires

|         |   |
|---------|---|
| Low     | 0 |
| High    | 0 |
| Coax    | 0 |
| Triax   | 1 |
| Quad    | 0 |
| Fiber   | 0 |
| Fluidic | 0 |

Series 4M

Termination type

IP rating 66

Cable Ø 0.00 - 0.00 mm

Matching parts

Status active

Alternative part



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

|                   |   |
|-------------------|---|
| Shell Style/Model | RMA*: Straight coupler  |
| Keying            | Circular, plug has male contact(s)  |
| Housing Material  | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Cable Fixing      | ∅ 0 - 0 mm  |
| Variant           |   |

### Performance

|               |                           |
|---------------|---------------------------|
| Configuration | 4M.675 : 1 Triax (75 Ohm) |
| Insulator     |                           |
| Rated Current | 15 Amps                   |

### Specifications

Vtest: 1500 V (AC), 2120 V (DC)  
Impedance: 75 Ohm

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

## Others

Humidity (max):  $\leq 95\%$  [at 60 deg C / 140 F]

Vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [ 6 ms]

Salt Spray Corrosion: >144 hr

Climatical Category: 55/175/21


Shielding (min): 85 dB (10 MHz)

IP Rating: 66

---

## DRAWINGS

### Draws

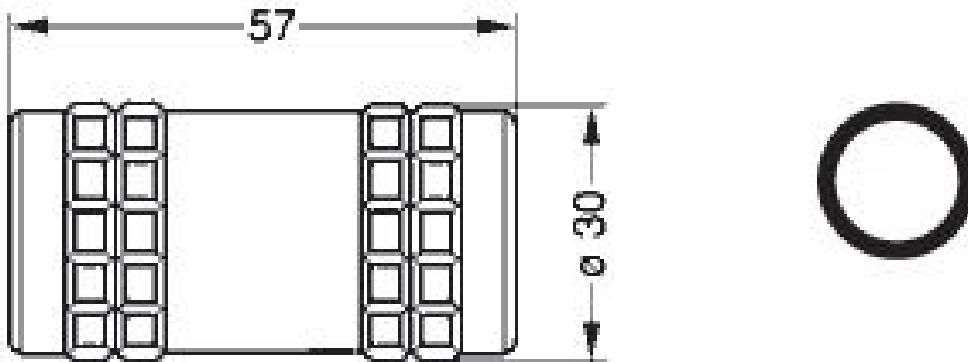

### Dimensions

|     | A    | L    |
|-----|------|------|
| mm. | 30   | 57   |
| in. | 1,18 | 2,24 |

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*