

ALUMINUM ELECTROLYTIC CAPACITORS

ULV Chip Type, High Voltage.
Long Life.




- Chip Type, high voltage and long life.
- Load life of 10000 hours at +105°C
- Applicable to automatic mounting machine using carrier tape.
- Compliant to the RoHS directive (2011/65/EU).



Specifications

Item	Performance Characteristics	
Category Temperature Range	-40 to +105°C	
Rated Voltage Range	160 to 500V	
Rated Capacitance Range	1.8 to 33μF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Leakage Current	Rated voltage (V)	160 to 450
	-	0.04CV+100(μA)max.(1 minute's at 20°C)
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C	
	Rated voltage (V)	160 200 250 400 450 500
Stability at Low Temperature	Measurement frequency: 120Hz	
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 10000 hours at 105°C.	
	Capacitance change	tan δ
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.	
	Capacitance change	tan δ
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the characteristic requirements listed at right when they are removed from the plate.	
	Capacitance change	tan δ
Marking	Black print on the case top.	


Chip Type

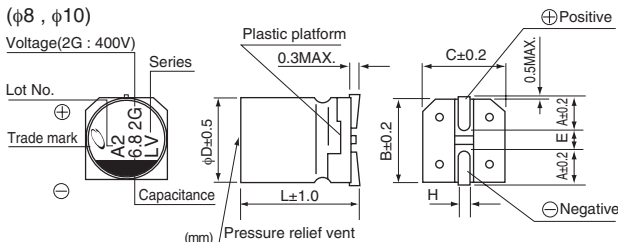

φxL (mm)	8x10	10x10	10x13.5
A	2.9	3.2	3.2
B	8.3	10.3	10.3
C	8.3	10.3	10.3
E	3.1	4.5	4.5
L	10	10	13.5
H	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1

Voltage (V)	160	200	250	400	450	500
Code	2C	2D	2E	2G	2W	2H

Type numbering system (Example : 400V 6.8μF)

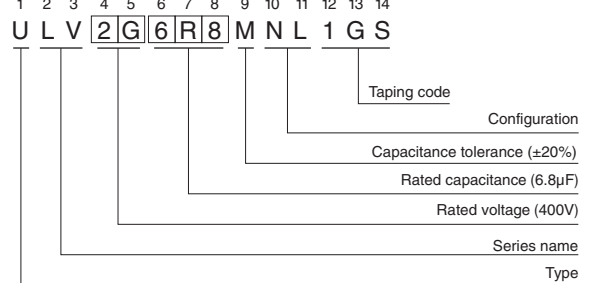

Dimensions

Cap.(μF)	Code	160		200		250		400		450		500	
		2C	2D	2D	2E	2G	2W	2H					
1.8	1R8											8 x 10	25
3.3	3R3											10 x 10	40
3.9	3R9												
4.7	4R7							8 x 10	35				
5.6	5R6												
6.8	6R8							10 x 10	50			10 x 13.5	45
7.5	7R5												
8.2	8R2							8 x 10	35				
10	100												
12	120												
15	150	8 x 10	50	8 x 10	50			10 x 13.5	55				
18	180												
22	220	10 x 10	65	10 x 10	65	10 x 13.5	55						
27	270												
33	330	10 x 13.5	70										

Rated ripple current (mArms) at 105°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.80	1.00	1.25	1.40	1.60

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.