

Type 0ADKC / 0ADKP

Time Delay, Ceramic Tube Fuse Series

HF [Ⓟ] 0ADKC/0ADKP Series 5x20mm Ceramic Tube Time Delay Fuse

RoHS 2 Compliant

Description

A 600 Vac / 500 Vdc rated ceramic tube cartridge fuse in a compact 5x20mm package.

Features

- Time Delay, high breaking capacity
- Ceramic tube, Silver plated copper cap construction
- Available in cartridge and pigtail axial lead
- Meet Underwriters Laboratories Standard UL 248-14(Pending)
- RoHS 2 compliant
- Halogen Free
- Leadfree

Applications

- Industrial Power Supply
- DC/DC module

LEAD FREE = [Ⓟ]
HALOGEN FREE = HF

Physical Specifications

Materials	Body : Ceramic
	Cap : Silver Plated Copper Alloy
	Pigtail Leads : Tin Plated Copper
Marking	On Fuse :
	"bel"
	"0ADK" "Current Rating", "Voltage Rating", "Appropriate Safety Logos"
	On Label :
	"bel", "0ADKC" or "0ADKP", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and " [Ⓟ] ", " [Ⓟ] " (China RoHS compliant).



Ratings

SAFETY AGENCY	VOLTAGE RATING (V)	AMPERE RANGE / VOLT @ I.R. ABILITY*
[Ⓟ] Pending	500mA - 20A / 600V AC 500mA - 20A / 500V DC 500mA - 20A / 400V DC	500mA - 20A / 600V @ 200A AC 500mA - 20A / 500V @ 300A DC 500mA - 10A / 400V @ 2KA DC

* I.R. = INTERRUPTING RATING = SHORT CIRCUIT RATING (AMPS)

Electrical Characteristics

Rated Current	1.5In	2.1In	2.75In	3.0In	4.0In	10.0In
< 1A	1 hour min.	N/A	N/A	120sec max	N/A	N/A
1A - 3.15A	1 hour min.	30min. max.	750ms - 80sec	N/A	95ms - 5sec	10ms - 150ms
4A - 6.3A	1 hour min.	30min. max.	750ms - 80sec	N/A	150ms - 5sec	10ms - 150ms
8A - 20A	30min. min.	30min. max.	750ms - 80sec	N/A	150ms - 8sec	10ms - 150ms

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com

Type 0ADKC / 0ADKP

Time Delay, Ceramic Tube Fuse Series


HF  0ADKC/0ADKP Series 5x20mm Ceramic Tube Time Delay Fuse

RoHS 2 Compliant

Environmental Specifications

Operating Temperature	-55 °C to +125 °C
Terminal Strength	MIL-STD-202G, Method 211 Test Condition A
Lead Solderability	MIL-STD-202, Method 208
Mechanical Vibration	MIL-STD-202, Method 201
Thermal Shock	MIL-STD-202, Method 107, Test Condition B (5 cycles -65 °C to +125 °C).
Humidity	MIL-STD-202, Method 103, Test Condition A 95%RH and 40 °C for 240 hours

Electrical Specifications

Part Number	Ampere Rating	Typical Cold Resistance (mohm)	Voltage and Interrupting Ratings	Typical Voltage Drop (mV)	Typical Pre-Arcing I ² t (A ² Sec)	Agency Approvals
						
0ADKC0500-XX 0ADKP0500-XX	500mA	382	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	190	0.287	Pending
0ADKC0630-XX 0ADKP0630-XX	630mA	359		261	0.34	Pending
0ADKC0800-XX 0ADKP0800-XX	800mA	175		144	1.18	Pending
0ADKC1000-XX 0ADKP1000-XX	1A	139		146	1.55	Pending
0ADKC1250-XX 0ADKP1250-XX	1.25A	134		138	2.34	Pending
0ADKC1600-XX 0ADKP1600-XX	1.6A	57		105	4.10	Pending
0ADKC2000-XX 0ADKP2000-XX	2A	55		130	10	Pending
0ADKC2500-XX 0ADKP2500-XX	2.5A	34		93	12.5	Pending
0ADKC3150-XX 0ADKP3150-XX	3.15A	28		110	17.8	Pending
0ADKC4000-XX 0ADKP4000-XX	4A	24		118	25	Pending
0ADKC5000-XX 0ADKP5000-XX	5A	17		104	50	Pending
0ADKC6300-XX 0ADKP6300-XX	6.3A	13		100	80	Pending
0ADKC8000-XX 0ADKP8000-XX	8A	9		85	179	Pending
0ADKC9100-XX 0ADKP9100-XX	10A	7.6		90	400	Pending
0ADKC9120-XX 0ADKP9120-XX	12A	6		80	576	Pending
0ADKC9150-XX 0ADKP9150-XX	15A	4.3		75	900	Pending
0ADKC9160-XX 0ADKP9160-XX	16A	3.7		68	1024	Pending
0ADKC9200-XX 0ADKP9200-XX	20A	3.3		75	1600	Pending

Consult manufacturer for other ratings

Specifications subject to change without notice

* DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C

* Typical Pre-arcing I²t are measured at 10In Current



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com


Type 0ADKC / 0ADKP

Time Delay, Ceramic Tube Fuse Series


HF Pb 0ADKC/0ADKP Series 5x20mm Ceramic Tube Time Delay Fuse

RoHS 2 Compliant

Average Time Current Curve

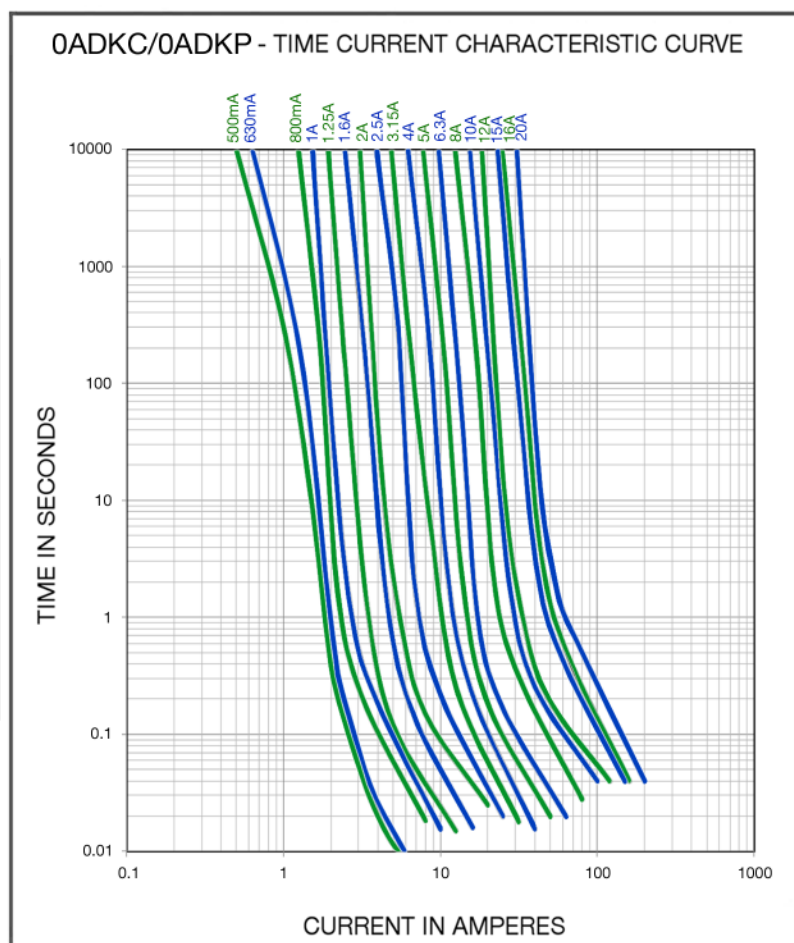

Temperature Re-Rating Curve

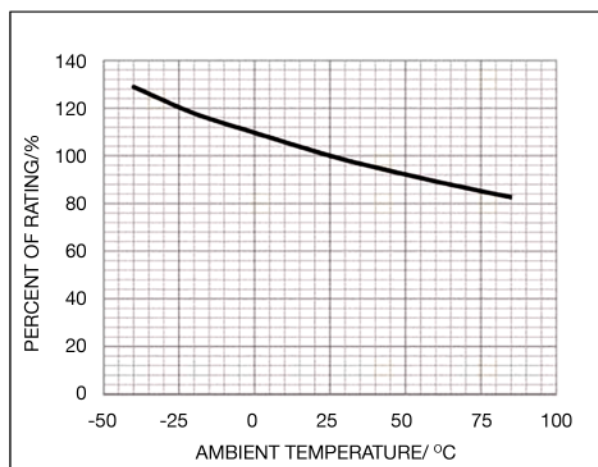

Soldering parameters for Pigtail Type

Wave Soldering Compatible : (260° C, 10 sec max)

Hand-Solder:

Solder Iron Temperature: (350° C +/- 5° C)

Heating Time: (5 sec max)

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com

Type 0ADKC / 0ADKP

Time Delay, Ceramic Tube Fuse Series

HF  0ADKC/0ADKP Series 5x20mm Ceramic Tube Time Delay Fuse

RoHS 2 Compliant

Fuse FGNO Explanation

0ADK X[XXXX] - XX


0ADKC/P=0ADKC/P; [XXXX]=Ampere Rating; XX=See Ordering Information as below

Fraction	Decimal	Milliamps	Bel FGNO[XXX]
1/2	.500	500	0500
	.630	630	0630
8/10	.800	800	0800


Fraction	Decimal	Amps	Bel FGNO[XXX]
	1.0	1	1000
1-1/4	1.25	1.25	1250
	1.60	1.6	1600
	2.0	2	2000
2-1/2	2.5	2.5	2500
	3.15	3.15	3150
	4.0	4	4000
	5.0	5	5000
	6.3	6.3	6300
	8.0	8	8000

Amps	Bel FGNO[XXX]
10	9100
12	9120
15	9150
16	9160
20	9200

Mechanical Dimensions

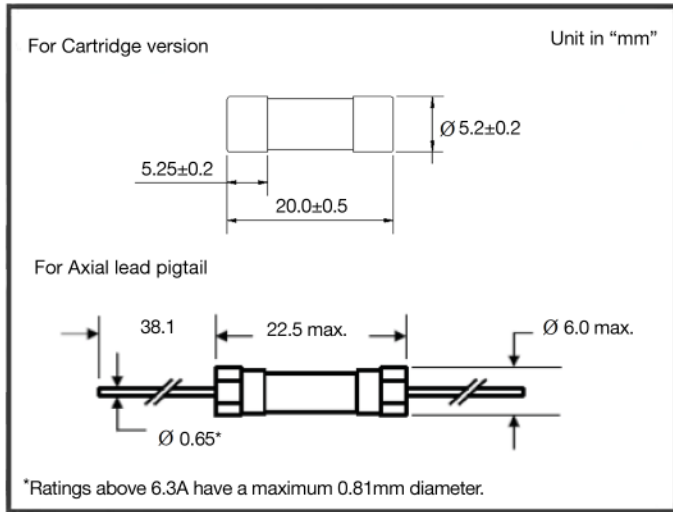

Ordering Information

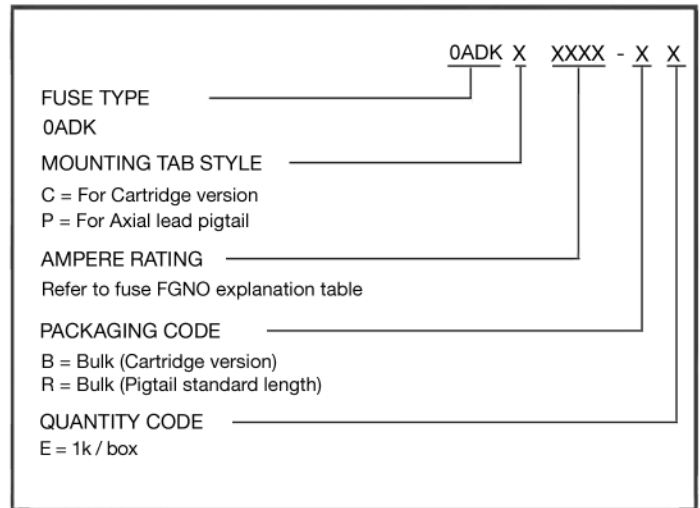

Packaging

Packaging Option	Quantity	Packaging Code
Bulk(Cartridge Type)	1000	BE
Bulk(Pigtail Type)	1000	RE

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com