

SCALE 2:1

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		rev	ecm no	dr	date
A	S05-0189	SH	06/28/05	SH	06/28/05
B	T06-0866	JH	7/3/06	SH	7/3/06

LINEAR	XX = ± 0.25				
	XXX = ± 0.15				
	XXXX = ± 0.05				
ANGULAR	$\pm 2^\circ$				

Dr	SH TAN	06/28/05	Product Family	ASME Y14.5	tolerance	ASME Y14.5	projection	size	A4	Scale	2:1
Eng	SH TAN	06/28/05	Spec ref								
Chr	SH TAN	06/28/05	Material								
Appr	JDEY NG	06/28/05	SEE NOTES								

4 LANE VERTICAL
TH HEADER




customer	10053670	Rev.	B
catalog no		sheet	1 of 2



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

Tous droits strictement reserves. Reproduction ou communication a des tiers interalite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

PRODUCT NO.	DIMENSION 'A'	DIMENSION 'B'	DIMENSION 'C'	PCB THICKNESS
10053670-001LF	2.75±0.20	3.20±0.10	2.54±0.20	1.57±0.10
10053670-002LF	4.35±0.20	3.20±0.10	3.50±0.12	2.36±0.23

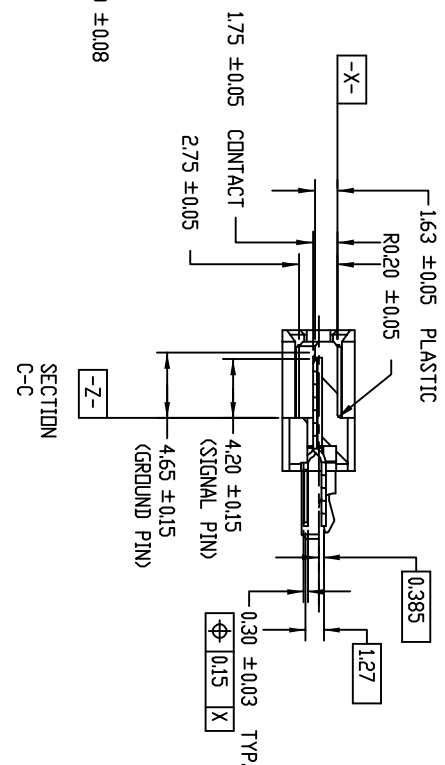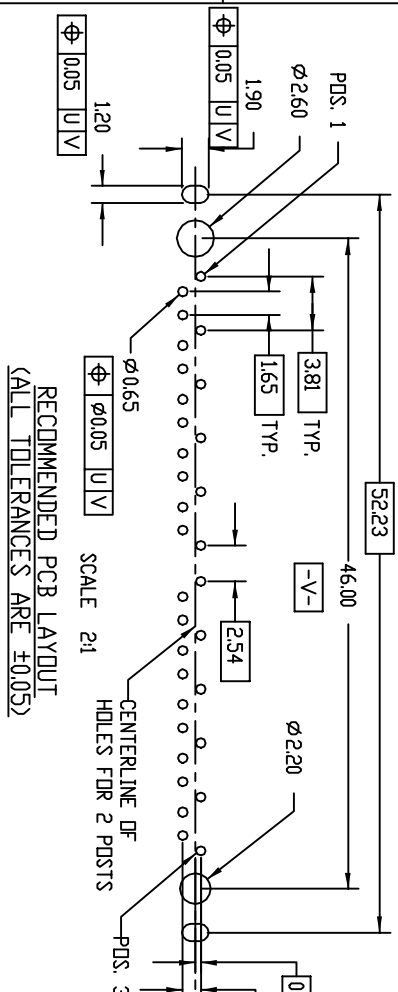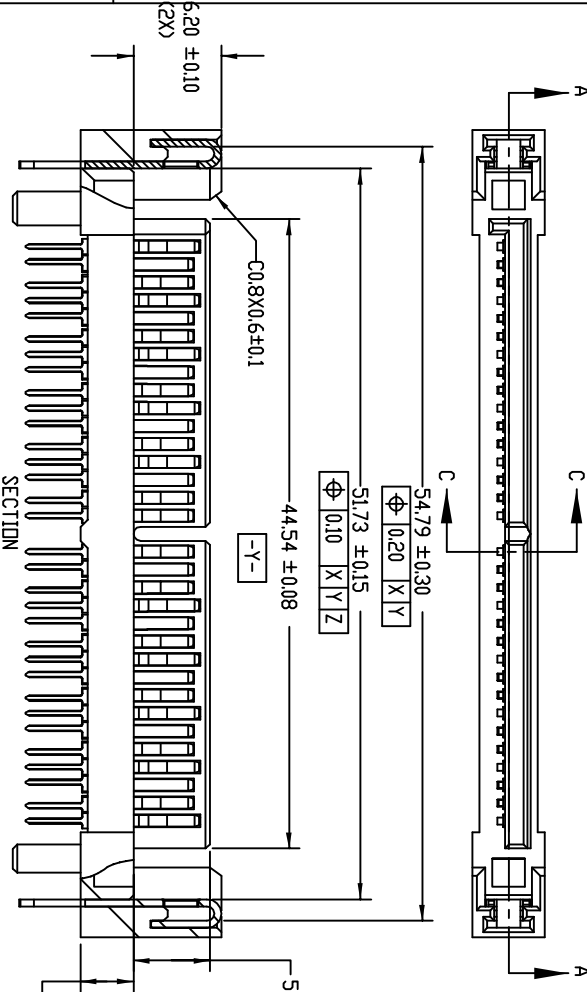

NOTES

1. MATERIAL:
HOUSING: HIGH TEMPERATURE PLASTIC, BLACK COLOR, UL94V-0
CONTACT: COPPER ALLOY
HOLD DOWN: COPPER ALLOY
2. FINISH:
1.27um MIN NICKEL UNDERPLATE OVERALL,
1.91um MIN TIN (LEAD-FREE) ON SOLDER TAIL,
0.76um MIN GOLD IN CONTACT AREA
THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRARED OR VAPOR PHASE REFLUX OVEN
3. CONTACT WIPER: 2.07 MIN FOR SIGNAL AND 2.52 MIN FOR GROUND
- 4.
- 5.

title	4 LANE VERTICAL TH HEADER	dwg no	10053670	Rev.	B
catalog no		CUSTOMER		Sheet	2 of 2