

Coupler connector - HC-26S1N1290DU - 1590357

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Coupler connector, straight, Screw locking, M27, Number of positions: 26, Type of contact: Socket, Solder connection, shielded: yes, Cable diameter: 2 mm...14.5 mm



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 100.45 g |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Technical data

General

| | |
|--|----------------------|
| Type of locking | Screw locking |
| Insertion/withdrawal cycles mechanical | 50 |
| Direction of rotation of contact chamber numbering | Standard |
| Coding | N |
| Contact connection method | Solder connection |
| Type of contacts | Socket |
| Number of positions | 26 |
| Contact diameter of power contacts | 1 mm |
| Litz wire cross section of power contacts min. | 0.08 mm ² |
| Litz wire cross section of power contacts max. | 1 mm ² |
| Nominal current per power contact at 25°C | 8 A |
| Conductor entry | 2 mm ... 14.5 mm |
| Pg housing screw connection | none |

Ambient conditions

| | |
|---------------------|-------------------|
| Ambient temperature | -20 °C ... 125 °C |
|---------------------|-------------------|

Coupler connector - HC-26S1N1290DU - 1590357

Technical data

Ambient conditions

| | |
|----------------------|-----------------------|
| Degree of protection | IP67, when plugged in |
|----------------------|-----------------------|

Material

| | |
|----------------------------|--|
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Insulator material | PA66 |
| Contact material | CuZn |
| Contact surface | Nickel-plated, gold coating |
| Gasket and O-ring material | FPM |

Specifications according to DIN EN 61984:2001

| | |
|---|--------|
| Installation height max. | 2000 m |
| Nominal / operating voltage of power contacts | 150 V |
| Rated surge voltage of power contacts | 1.5 kV |
| Overvoltage category of power contacts | II |
| Degree of pollution of power contacts | 3 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260708 |
| eCl@ss 7.0 | 27440312 |
| eCl@ss 8.0 | 27440102 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC001121 |
| ETIM 5.0 | EC002641 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11 | 43172015 |
| UNSPSC 12.01 | 43201404 |
| UNSPSC 13.2 | 43201404 |

Coupler connector - HC-26S1N1290DU - 1590357

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted


Approval details

EAC


EAC

Drawings

Schematic diagram



Diagram

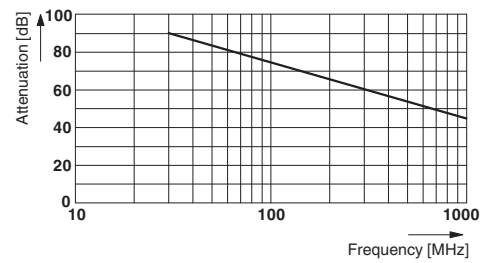

Dimensional drawing

