


SD-D/SC/LA

Order No.: 2964898




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2964898>

Rail-mountable socket, with screw connection, with light indicator, housing color green, national version: D



Commercial data

| | |
|--------------------------|--------------------------------------------------------------------------------------------------------|
| GTIN (EAN) |  4 017918 190651 |
| sales group | H070 |
| Pack | 5 pcs. |
| Customs tariff | 85366990 |
| Catalog page information | Page 602 (IF-2009) |

Product notes

WEEE/RoHS-compliant since:
10/26/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|-----------------------|----------|
| Nominal voltage U_N | 250 V AC |
| Nominal current I_N | 16 A AC |
| | 10 A DC |

| | |
|-----------------------------------------|-----------------------------------|
| Status display | Glow lamp or LED with preresistor |
| Contact material | CuZn37 |
| For country-specific use in | D |
| Color | green |
| Insulating material | PA |
| Ambient temperature (operation) | -20 °C ... 60 °C |
| Ambient temperature (storage/transport) | -20 °C ... 60 °C |
| Standards/regulations | IEC 83 |
| | DIN 49440-1 |
| Width | 45 mm |
| Height | 75 mm |
| Depth | 70.5 mm |

Connection data

| | |
|----------------------------------------|---------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Type of connection | Screw connection |
| Stripping length | 8 mm |
| Screw thread | M3 |


Certificates / Approvals

Certification

GOST, VDE-PZI

Diagrams/Drawings

Circuit diagram

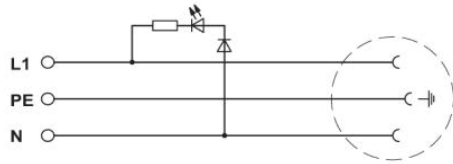

SD-D/SC/LA Order No.: 2964898

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2964898>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;