# DIMENSIONS

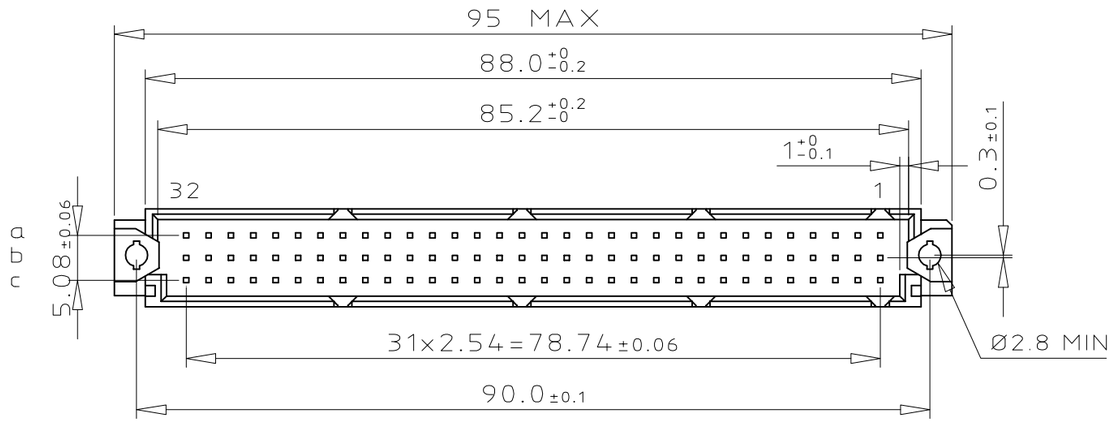


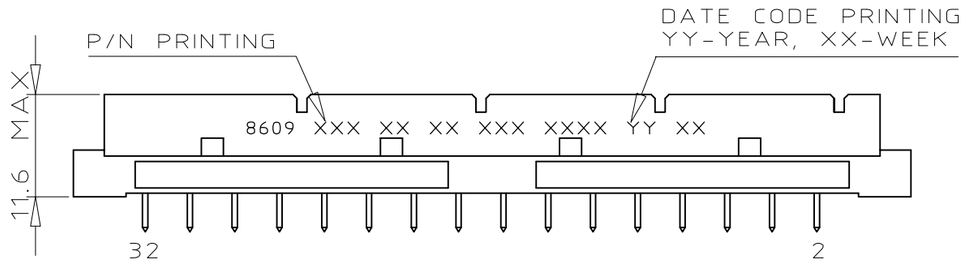





# TERMINATION

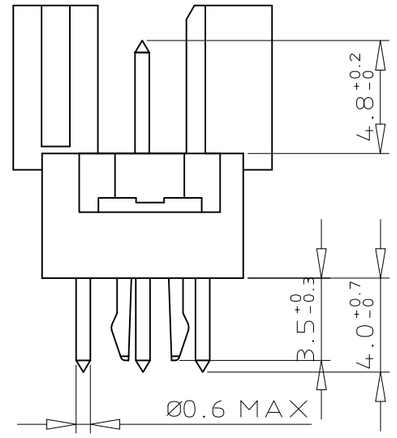


# ORDERING INFORMATION

| SERIES | 8609 | 3 | 48 | 7 | 8 | 14 | 7 | 4 | 8 | ELF |
|---|---|---|---|---|---|---|---|---|---|---|
| ROWS FITTED WITH CONTACTS | | | | | | | | | | |
| ROW a b c | | 3 | 48 | | | | | | | |
| NO. OF CONTACTS | | | | | | | | | | |
| TYPE OF INSULATOR | | | | | | | | | | |
| 3 ROW MALE INSULATOR | | | | 7 | | | | | | |
| METHOD OF MOUNTING | | | | | | | | | | |
| REVERSE MOUNTING - STYLE R | | | | | 8 | | | | | |
| TERMINATION | | | | | | | | | | |
| STRAIGHT SPILL | | | | | | 14 | | | | |
| OPTIONS | | | | | | | | | | |
| NO OPTION | | | | | | | 7 | | | |
| WITH HARPOONS | | | | | | | H | | | |
| PERFORMANCE CLASS | | | | | | | | | | |
| DIN 41612 CLASS 3 | | | | | | | | 4 | | |
| DIN 41612 CLASS 2 | | | | | | | | 5 | | |
| DIN 41612 CLASS 1 | | | | | | | | 6 | | |
| AS PER MIL C 55302 / JSS 50808 | | | | | | | | 8 | | |
| PITCH PER ROW | | | | | | | | | | |
| 5.08 mm EVEN LOADING | | | | | | | | | 8 | |
| LEAD FREE VERSION | | | | | | | | | | ELF |

# PCB LAYOUT

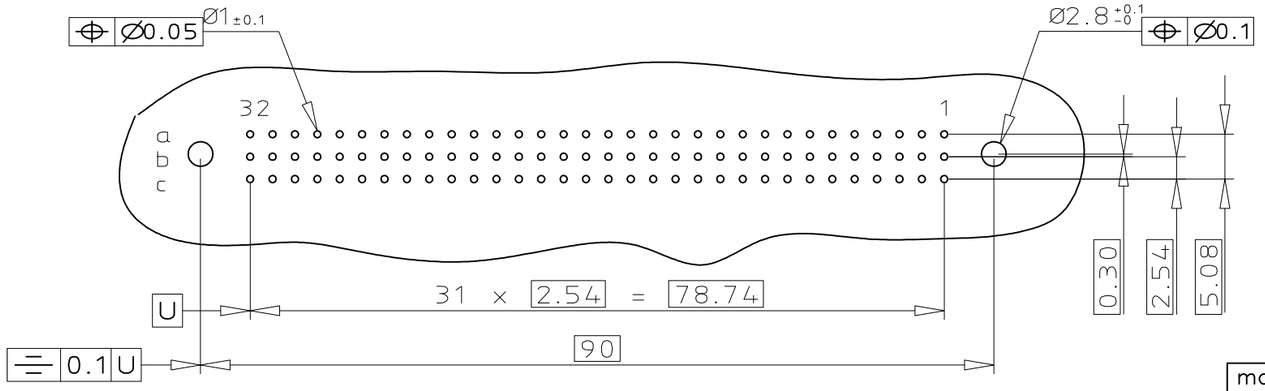


GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING 8609-0000A

| | | | | | | | | | |