

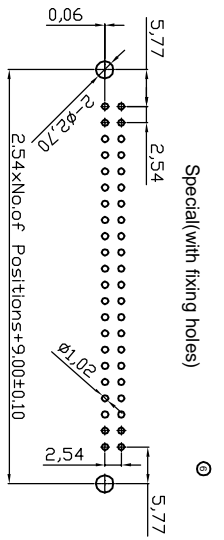


**A**

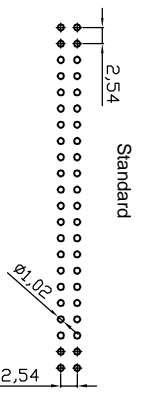

- NOTES:**
- MATERIAL**
1. Insulator Material: PBT+30%G.F. (UL94V-0), Grey
  2. Contact Material : Brass
  3. Contact Plating : Gold Flash / Tin or Full Timmed Over Ni
- ELECTRICAL**
1. Current Rating : 3.0AMP
  2. Withstand Voltage : 1000V AC/minute
  3. Contact Resistance : 20mΩ max
  4. Insulation Resistance: 1000MΩ min
- ENVIRONMENTAL**
1. Operation Temperature: -40°C to +105°C
  2. Packing : Tray
  3. No side slot "A" and "B" from 6 to 16 pin
  - No side slot "A" from 18 to 58 pin

**B**



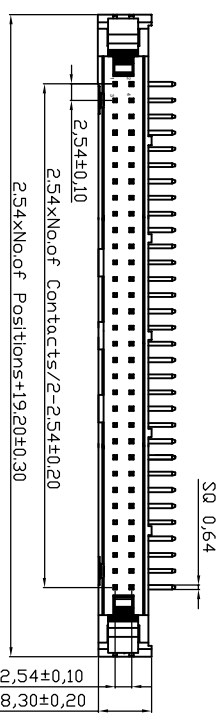


Ordering Information  
AWH XXA-02X2-T

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE#0.05)

- ③ No. of Contacts
- |       |               |                     |
|-------|---------------|---------------------|
| 06 08 | 2: Gold Flash | Latch Type          |
| 10 12 |               | 0(W/o latch)        |
| 14 16 |               | 2(with short latch) |
| 18 20 |               | 3(with long latch)  |
| 24 26 |               |                     |
| 30 34 |               |                     |
| 40 50 |               |                     |
| 60 64 |               |                     |

**D**

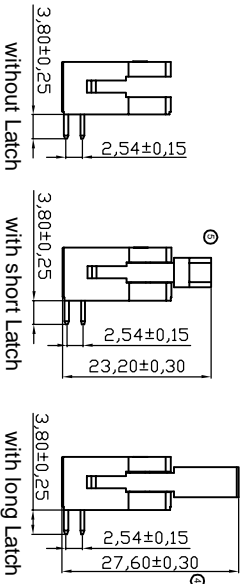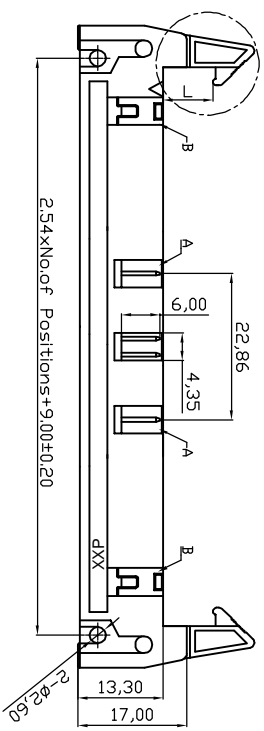

**F**

**RoHS compliant**



Scale	1:1	⑨	Add UL file no.	12.12.2013	Amy
TOLERANCE		⑧	Add the fulled Timed version	11.11.2013	Winnie
X.X	±0.40	⑦	Update	29.03.2013	Winnie
X.XXX	±0.25	⑥	Add special PCB layout	07.12.2010	Alex
X.XXX	±0.15	⑤	Correct drawing of short latch	05.05.2010	Dean
Angle	±3°	④	Change dimension	27.10.2009	Dean
		③	Id.		
			Modification		

Customer-No.		Date	25.01.2006	Name	Alex
			11.11.2013		Winnie
ASSMANN WSW-No.					
AWH XXA-02X2-T					
Drawing-No.					
ASS 2311 CO					rev09
Replace					Sheet