

SUMMARY



Image is for illustrative purpose only

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Download

[Request a quote](#)

[Catalog](#)

Series	0S
Termination type	No contacts / Accessory
IP rating	61
Cable Ø	0.00 - 0.00 mm
Matching parts	
Status	obsolete
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	BRR*: Cap spring loaded dust cap for ERA,ERN and EG receptacle or PSA and PK fixed receptacle
Keying	No keying
Housing Material	PSU (Polysulfone) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	G : Grey

Performance

Configuration
Insulator
Rated Current


Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles
 Temp (min / max): -50°C / +150°C
 Axes material: Nickel-plated brass
 Maximum operating temperature: 100°C
 Watertightness: IP61 according to IEC 60529
 IP Rating: 61

DRAWINGS

Draws

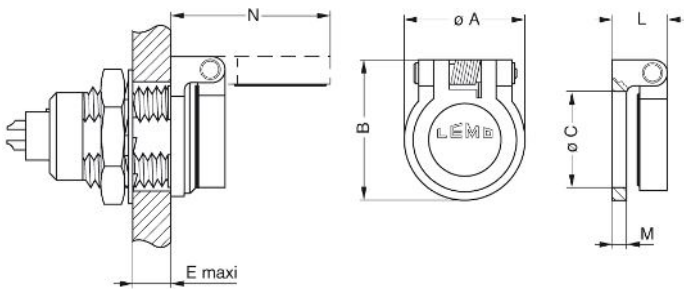

No keying

Dimensions

	A	B	C	E	L	M	N
mm.	11	13.3	9	5.8	5	1.2	15.3
in.	0,43	0,52	0,35	0,23	0,20	0,05	0,60

RECOMMENDED BY LEMO

Tools

None

Cables

121 221			
131 221			
151 221			

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

