

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	1



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Female crimp
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	CAB.015.NLC.C92A
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CK*: Fixed receptacle with two nuts (back panel mounting)
Keying	3 keys (alpha=0, gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), black
Cable Fixing	∅ 0 - 0 mm
Variant	
Weight	8.65 g

### Performance

Configuration	2P.015 : 1 Fluidic, 10 Low V.
Insulator	
Rated Current	5 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	1.15
Air clearance min. (mm) or Creepage distance min. (mm):	0.9

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*


## Others

IP Rating: 50

---

# DRAWINGS

## Draws

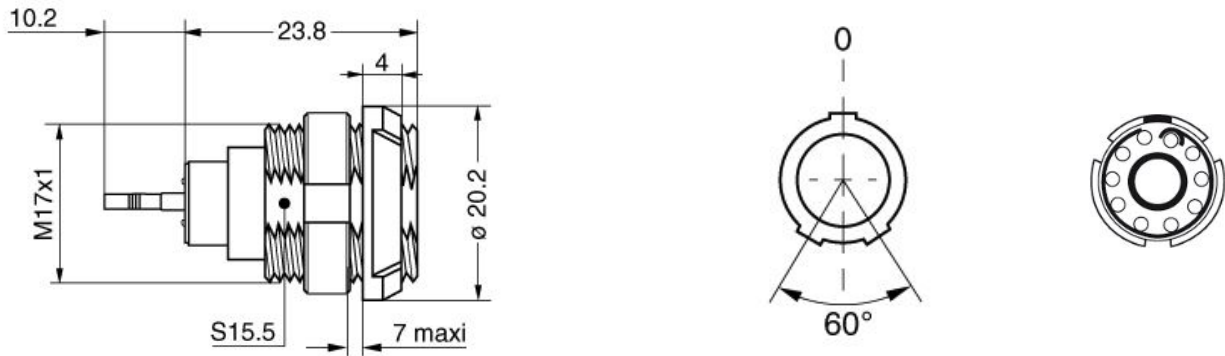

## Dimensions

	A	N	a
mm.	20.2	23.8	10.2
in.	0,80	0,94	0,40

---

# RECOMMENDED BY LEMO

## Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

Positionner: DCE.91.072.BVM

Extractor: DCF.91.070.2LT

Replacement contact: EGG.2B.655.ZZM

## Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*