

## SUMMARY



*Image is for illustrative purpose only*

### # Wires

Low	10
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Female solder
IP rating	50
Cable Ø	7.30 - 9.20 mm
Matching parts	
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CR*: Free receptacle with cable collet and nut for fitting a bend relief
Keying	3 keys (alpha=0, gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 7.3 - 9.2 mm
Variant	
Weight	11.39 g

### Performance

Configuration	2P.M10 : 8 Low V.
Insulator	
Rated Current	8 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	1.45
Air clearance min. (mm) or Creepage distance min. (mm):	0.75

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Others

F ret (min): 150 N

F ret (max): 250 N


Steam sterilization: 20 times

IP Rating: 50

---

## DRAWINGS

### Draws

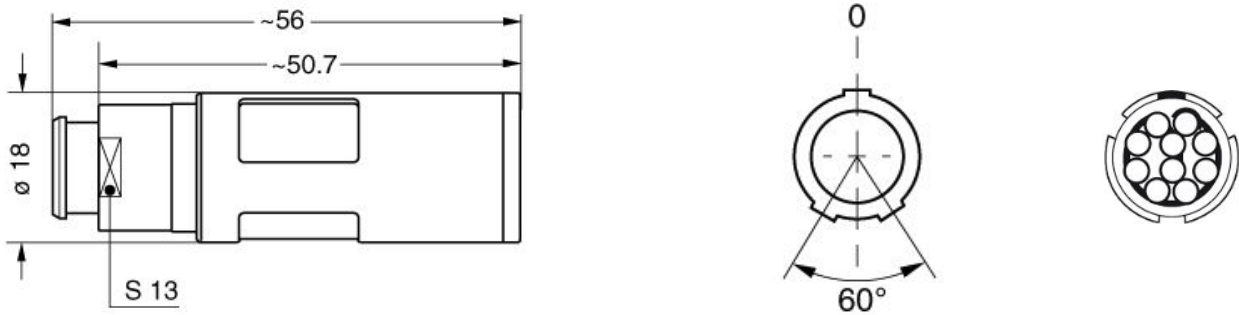

### Dimensions

	A	L
mm.	18	56
in.	0,71	2,20

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*