










Last Time Buy Date: 30 Sep 2019

Date of discontinuation: 31 Mar 2020

3.0mm max.

< List of part numbers with package codes > DEA1X3D330JC1B

Shape

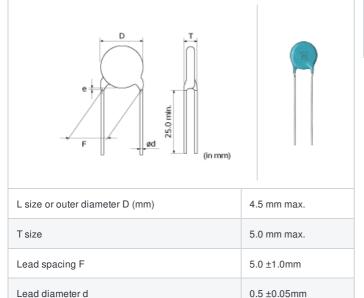

References

Packaging	Specifications	Minimum quantity
В	Packing in bulk	500

Specifications

Paint dripping e

Capacitance	33pF ±5%
Rated voltage	2000Vdc
Temperature characteristics (complied standard)	SL(JIS)
Temperature coefficient	+350 to -1000ppm/°C
Temperature range of temperature characteristics	20 to 85°C
Operating temperature range	-25 to 125°C

1 of 2




^{1.} This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





^{2.} This datasheet has only typical specifications because there is no space for detailed specifications.


Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

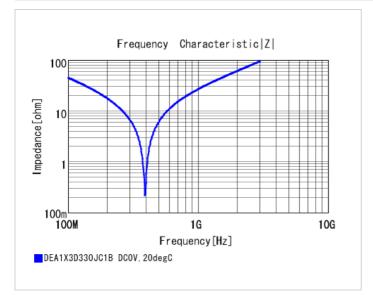


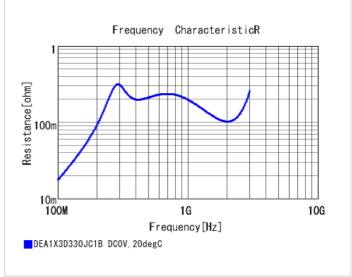



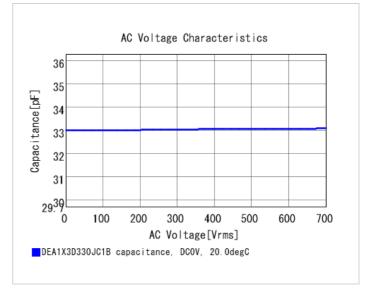

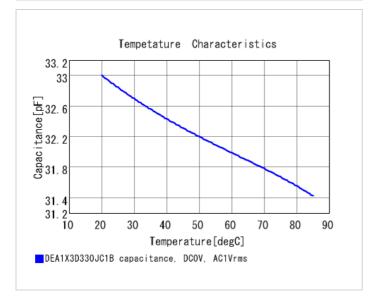

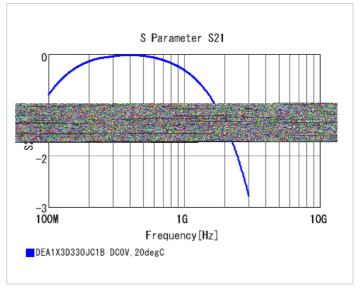

2 of 2

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.