

## SUMMARY

### # Wires

Low	36
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	1R
Termination type	Female print PCB
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	EBG*: Fixed receptacle, key (G) or key (A) with visible shell
Keying	3 keys (alpha=50,beta=30, plug: male contacts, receptacle: female contacts)
Housing Material	Crastin® PBT (Polybutylene terephthalate), gray
Cable Fixing	∅ 0 - 0 mm
Variant	
Weight	14.05 g

### Performance

Configuration	1R.336 : 36 low voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	2.5 Amps

### Specifications



Contact Type: Print (straight)

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

---

## DRAWINGS

### Draws

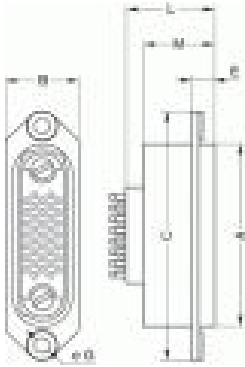

### Dimensions

	A	B	L	M
mm.	24.5	9	30.5	23.5
in.	0,96	0,35	1,20	0,93

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.