

SUMMARY



Image is for illustrative purpose only

Wires

| | |
|---------|---|
| Low | 1 |
| High | 0 |
| Coax | 0 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|----------------|
| Series | 00 |
| Termination type | Male solder |
| IP rating | 50 |
| Cable Ø | 2.20 - 2.60 mm |
| Matching parts | ERA.00.113.CTL |
| Status | active |
| Alternative part | |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | FFA*: Straight plug with cable collet |
| Keying | Circular (can rotate) |
| Housing Material | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Cable Fixing | L27: 2.2 - 2.6 mm |
| Variant | |
| Weight | 3.01 g |

Performance

| | |
|---------------|-----------------------|
| Configuration | 0.113 : 1 Low Voltage |
| Insulator | T: PTFE |
| Rated Current | 8 Amps |

Specifications

Contact Type: Solder
Vtest: 850 V (AC), 1200 V (DC)


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

IP Rating: 50

DRAWINGS

Draws

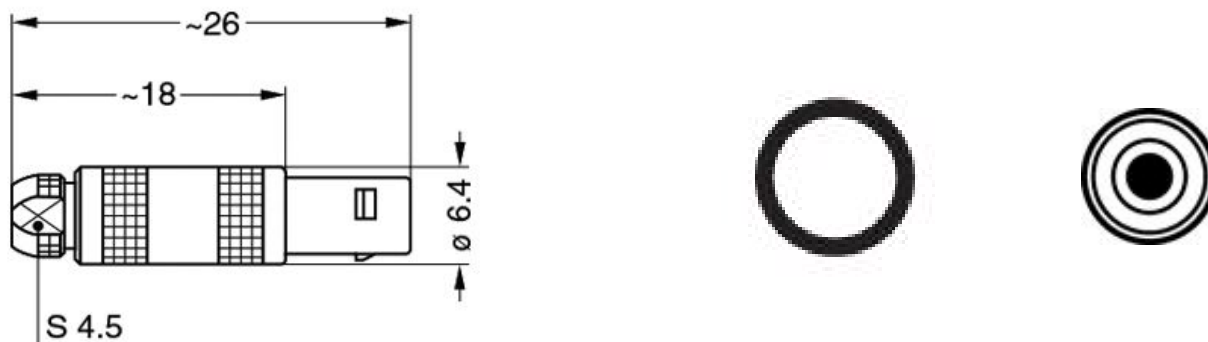

Dimensions

| | A | L | M |
|-----|------|------|------|
| mm. | 6.4 | 26 | 18 |
| in. | 0,25 | 1,02 | 0,71 |

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.00.003.PA045

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.