

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	3Y
Termination type	Male solder High-Voltage
IP rating	50
Cable Ø	0.00 - 6.00 mm
Matching parts	ERA.3Y.425.CLL
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFR*: Straight plug for cable crimping with bend relief and safety locking ring
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 6 mm
Variant	
Weight	97.45 g

### Performance

Configuration	3Y.425 : 1 High Voltage
Insulator	F: Silicon (LSR)/ Y series
Rated Current	8 Amps

### Specifications

Contact Type: Solder	
Test voltage (kV DC)	52
Test voltage (kV AC)	37

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Creepage dist. (mm): 25.5



## Others

IP Rating: 50

---

# DRAWINGS

## Draws

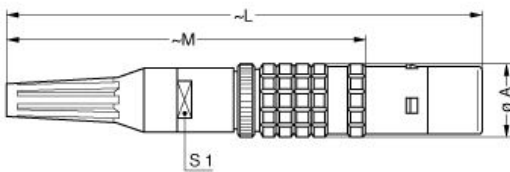

## Dimensions

	A	L	M	S1
mm.	19	120	92	15
in.	0,75	4,72	3,62	0,59

---

# RECOMMENDED BY LEMO

## Tools

None

## Cables

120 222			
121 221			
130 222			

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

131 221			
151 221			
161 221			

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*