

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	2
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	3W
Termination type	Hybrid contacts
IP rating	68
Cable Ø	0.00 - 0.00 mm
Matching parts	EVG.3W.93B.CLL
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FV_/Z*: Straight plug, cable collet and nut for fitting a bend relief
Keying	1 key (alpha=0; Plug: male contacts; Receptacle: female contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	Z : Nut for fitting a bend relief
Weight	96.20 g

### Performance

Configuration
Insulator
Rated Current

### Specifications

Contact Type: Solder

### Others


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Pressure: 30 bars  
IP Rating: 68

---

## DRAWINGS

### Draws

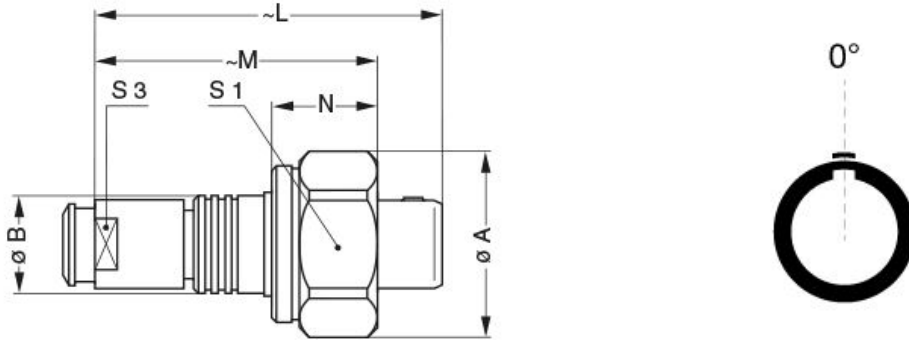

### Dimensions

	A	B	L	M	N	S1	S3
mm.	27.8	17	60.5	46.9	16.5	26	15
in.	1,09	0,67	2,38	1,85	0,65	1,02	0,59

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*