

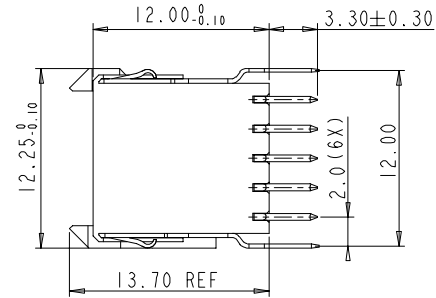
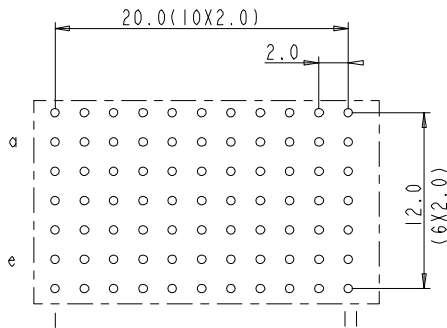


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

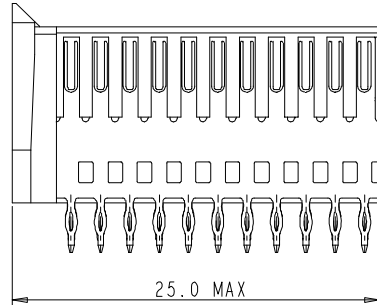

All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

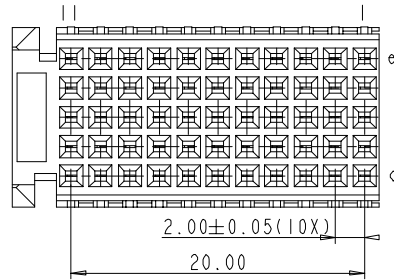

**PERFORMANCE CHARACTERISTICS**

- CURRENT RATING : 1.5A AT 20°C (FULLY LOADED)
- CURRENT RATING : 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10<sup>4</sup> MΩ MIN

- NOTES**
1. " " LEAD FREE INDICATOR : LF=LEAD FREE  
" " PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
  2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
  3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
  4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0114	ALEX E	27.11.04
C	DG05-0297	Kason	05-08-05
D	DG06-0254	Kason	06-27-06
E	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code	Heatreat	tolerance 1 DEC ± 0.2 1 DEC 2 DEC ± 0.1 2 DEC ANGLE ± 1° HOEKEN	projection size A4 Scale 2.000
Plating/Finish		Dr M.Fret 31-10-97	MM
Eng	Chr	Product family	REL Level
Appr		Model Name HM2S30PE5101	ECN
FCI		Model Revision	Rev. E
Pro/E file	catalog no	HM2S30PE5101----	CUSTOMER DRAWING sheet 1 of 1
title	MILLIPACS 2/TYPE C(W/O LOCK.PEG) SHIELDED		dwg no BSC201907010