


DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED	TOLERANCES ARE:
ONE PLACE DECIMALS ±	TWO PLACE DECIMALS ±	THREE PLACE DECIMALS ±	FOUR PLACE DECIMALS ±
			ANGLES ±

DO NOT SCALE FROM THIS PRINT

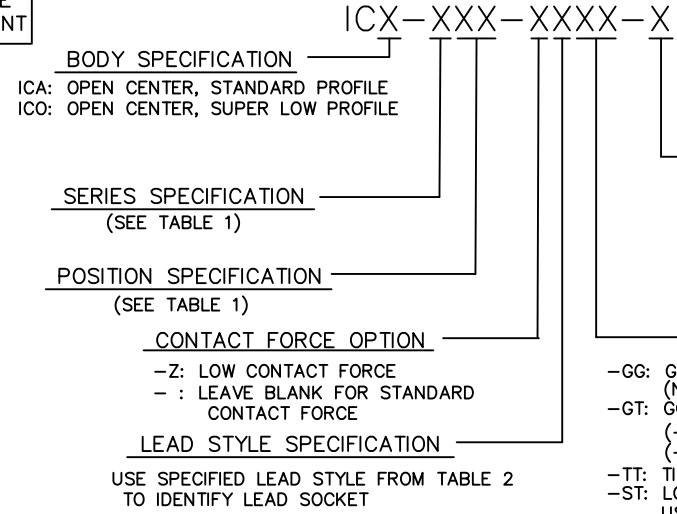

- OPTION #1**
- L: LOCKING LEAD (USE SC-1L1-GT: STYLE -S, -ZS ONLY)
 - 2: STYLE -W ONLY (SEE TABLE 2)
 - 3: STYLE -W ONLY (SEE TABLE 2)

- PLATING SPECIFICATION**
- GG: GOLD/GOLD- SPECIFY -GG IN SOCKET SUFFIX -XX (NOT AVAILABLE ON -F & -K LEAD STYLE)
 - GT: GOLD/TIN- SPECIFY -GT IN SOCKET SUFFIX -XX (-F LEAD STYLE AVAILABLE FOR EXISTING CUSTOMERS ONLY) (-E LEAD STYLE EZ-2P3 AVAILABLE FOR EXISTING CUSTOMERS ONLY)
 - TT: TIN/TIN- SPECIFY -TT IN SOCKET SUFFIX -XX (STYLES -S, -ZS, -W, -ZW, -A, -C, -L, -M, -N ONLY)
 - ST: LOW GOLD/TIN - SPECIFY -ST IN SOCKET SUFFIX -XX(-S & -ZS ONLY)(ON -L OPTION USE SC-1L1-GT OR EZ-1L1-GT ONLY)
 - EE: EXTRA HEAVY GOLD/EXTRA HEAVY GOLD-SPECIFY -EE IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)
 - EG: EXTRA HEAVY GOLD/GOLD- SPECIFY -EG IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)
 - ET: EXTRA HEAVY GOLD/TIN- SPECIFY -ET IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)
 - GE: GOLD/EXTRA HEAVY GOLD- SPECIFY -GE IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)
 - TE: TIN/EXTRA HEAVY GOLD- SPECIFY -TE IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)

- NOTES:
- MINIMUM PUSHOUT FORCES:
 ICA ASSEMBLY: 5 LBS.
 ICO ASSEMBLY: 5 LBS.
 - MAXIMUM ALLOWABLE BOW:
 .003 [.08] INCH PER INCH.
 - GG PLATING OPTION NOT AVAILABLE ON SC-2P3-XX OR EZ-1S1-XX.
 -GT PLATING OPTION NOT AVAILABLE ON SC-1S1-XX, SC-1P3-XX, OR EZ-1S1-XX.
 - GG PLATING OPTION AVAILABLE TO EXISTING CUSTOMERS ONLY ON EZ-2P3-XX.
 -GT PLATING OPTION AVAILABLE TO EXISTING CUSTOMERS ONLY ON SC-2P3-XX AND EZ-2P3-XX.

TABLE 1 (* : CUT TO LENGTH IN FIG 1) (** = EXISTING CUSTOMERS ONLY)

SERIES	POSITION	ICA	ICO
-3	06	N/R	N/R
	08	SBOA-308	SBO-308
	10	N/R	N/R
	12	N/R	N/R
	14	SBOA-314	SBO-314
	16	SBOA-316	SBO-316
	18	SBOA-318	SBO-318
	20	SBOA-320	SBO-320
	22	SBOA-324*	SBO-324*
	24	SBOA-324	SBO-324
-4	***28	ICA-328-V	N/R
	22	SBOA-422	SBO-422
	24	N/R	N/R
-6	10	N/R	N/R
	14	N/R	N/R
	16	N/R	N/R
	18	N/R	N/R
	20	N/R	N/R
	22	N/R	N/R
	24	SBOA-624	SBO-624
	28	SBOA-628	SBO-628
	32	SBOA-632	SBO-632
	40	SBOA-640	SBO-640
-9	48	SBOA-648	SBO-648
	14	N/R	N/R
	24	N/R	N/R
	28	N/R	N/R
	32	N/R	N/R
	40	N/R	N/R
	48	N/R	N/R
	50	N/R	N/R
	64	N/R	N/R

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, REPRODUCED, COPIED, OR TRANSMITTED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

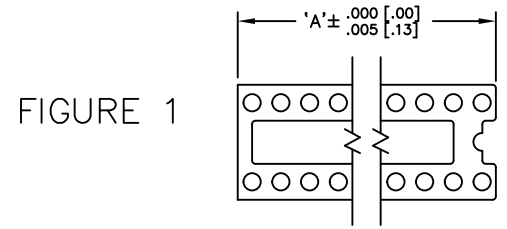


FIGURE 1

REF. PART No.	'A'
ICA-322-XXX	1.100 [27.94]
ICO-322-XXX	1.100 [27.94]

MATERIAL: INSULATOR: BLACK G.F. POLYESTER UL RATED 94V-0 SOCKET: CONTACT: 1/4 HARD BeCu SHELL: 1/2 HARD BRASS	EXISPROD\ASSEMBLY\DIP ICX-ASM1 520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150 PHONE (812) 944-6733 P.O. BOX 1147 CODE 55322	
	MADE BY: JORDAN 10-29-86 CHECKED BY: FARNSLEY 11-10-86	ENG. APPROVAL