


CMOS/ 1.8V to 3.3V/ 2.0×1.6mm

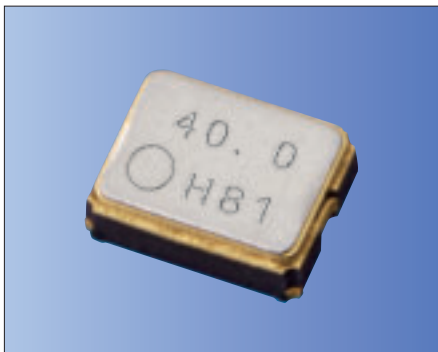

RoHS Compliant

### Features

- Ultra Miniature ceramic package  
2.0 (L) × 1.6 (W) × 0.55 (H) mm (Typ.)
- Highly reliable with seam welding
- CMOS output
- Supply voltage  $V_{CC} = 1.8V/ 2.5V/ 3.3V$   
Wide operating voltage range 1.6 to 3.63V
- Low current consumption

Table 1

Freq. Tol. Code	Tol. $\times 10^{-6}$	Operating Temperature Range (°C)	Note
0	$\pm 50$	-10 to +70	Standard specifications
S	$\pm 30$		
U	$\pm 25$	-40 to +85	Please contact us for available frequencies.
F	$\pm 100$		
G	$\pm 50$		
6	$\pm 50$	-40 to +105	

### How to Order

KC2016B 40.0000 C 1 □ E 00  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (1.8V, 2.5V, 3.3V Compatible)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%, Stand-by)
- ⑦ Individual Specification (STD Specification is "00")

Packaging (Tape & Reel 2000 pcs./ reel)


### Specifications

Item	Symbol	Conditions	Min.	Max.	Units	
Output Frequency Range	$f_o$		1.5	50	MHz	
Frequency Tolerance	$f_{tol}$	Initial tolerance, Operating temperature range, Rated power supply voltage change, Aging (1 year @25°C), Shock and vibration	Op. Temp.: -40 to +85°C	-100	+100	$\times 10^{-6}$
			Op. Temp.: -10 to +70°C/ -40 to +85°C/-40 to +105°C	-50	+50	
			Op. Temp.: -10 to +70°C	-30	+30	
			Op. Temp.: -10 to +70°C	-25	+25	
Storage Temperature Range	$T_{stg}$		-55	+125	°C	
Operating Temperature Range	$T_{use}$	Standard Specifications	-10	+70	°C	
		Extend (Option)	-40	+85		
Max. Supply Voltage	—		-0.6	+6.0	V	
Supply Voltage	$V_{CC}$		+1.6	+3.63	V	
Current Consumption (Maximum Loaded/ 1.6< $V_{CC}$ <2.0V)	$I_{CC}$	1.5< $f_o$ <24MHz	—	2.5	mA	
		24< $f_o$ <40MHz	—	3.5		
		40< $f_o$ <50MHz	—	4.5		
Current Consumption (Maximum Loaded/ 2.0< $V_{CC}$ <2.8V)	1.5< $f_o$ <24MHz	—	3.0			
	24< $f_o$ <40MHz	—	4.5			
	40< $f_o$ <50MHz	—	5.0			
Current Consumption (Maximum Loaded/ 2.8< $V_{CC}$ <3.63V)	1.5< $f_o$ <24MHz	—	3.5			
	24< $f_o$ <40MHz	—	5.0			
	40< $f_o$ <50MHz	—	6.0			
Stand-by Current	$I_{std}$		—	10	$\mu A$	
Symmetry	SYM	@50% $V_{CC}$	45	55	%	
Rise/ Fall Time (10% $V_{CC}$ to 90% $V_{CC}$ Maximum Loaded)	$t_r/ t_f$	1.6< $V_{CC}$ <2.0V	—	6.5	ns	
		2.0< $V_{CC}$ <2.8V	—	5.0		
		2.8< $V_{CC}$ <3.63V	—	4.5		
Low Level Output Voltage	$V_{OL}$	$I_{OL} = 4mA$	—	10% $V_{CC}$	V	
High Level Output Voltage	$V_{OH}$	$I_{OH} = -4mA$	90% $V_{CC}$	—	V	
CMOS Load	$L_{CMOS}$	CMOS Output	—	15	pF	
Input Voltage Range	$V_{IN}$		0	$V_{CC}$	V	
Low Level Input Voltage	$V_{IL}$		—	30% $V_{CC}$	V	
High Level Input Voltage	$V_{IH}$		70% $V_{CC}$	—	V	
Disable Time	$t_{dis}$		—	100	ns	
Enable Time	$t_{ena}$		—	5	ms	
Start-up Time	$t_{str}$	@Minimum operating voltage to be 0 sec.	—	10	ms	
1 Sigma Jitter	$J_{Sigma}$	Measured with Wavecrest SIA-3000	—	8	ps	
Peak to Peak Jitter	$J_{PK-PK}$		—	80	ps	

Note: All electrical characteristics are defined at the maximum load and operating temperature range.  
Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

### Dimensions

(Unit: mm)

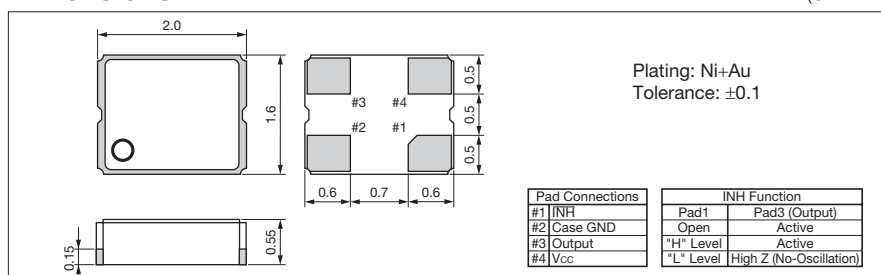

### Recommended Land Pattern

(Unit: mm)

