| muRata Inductor Data S   | Sheet       |   |  |     |  |
|--|-------------|---|--|-----|--|
| LQW15AN2N2B80# "#" indicates a package specification code.                       |             |   |  |     |  |
| In Production General 125 Wound (Non) Low Rdc High Tight Q Fight Reflow OK React |             |   |  |     |  |
| < List of part numbers with package codes > LQW15AN2N2B80D , LQW15AN2N2B80B      |             |   |  |     |  |
| Shape  |             | Note  | 25   |     |  |
|  | mj          | necessar<br>Please ap<br>operating<br>Please co | ng temperatures exceeding +85°C, der<br>y for the LQW15A_80 series.<br>oply the derating curve shown in the cha<br>temperature.<br>onsider "Notice (Rating)."<br>erences<br>Specifications<br>g 180mm Paper taping |     |  |
| L size   | 1.0 ±0.1mm  | B   | Packing in bulk  | 500 |  |
| W size   | 0.6 ±0.1mm  |   |  |     |  |
| T size   | 0.5 ±0.1mm  |   | Mass (Typ.)  |     |  |
| Size code in inch (mm)   | 0402 (1005) | 1 piece 0.0009g                                 |  |     |  |

# Specifications

| Inductance  | 2.2nH ±0.1nH |
|---|--------------|
| Inductance test frequency   | 100MHz       |
| Rated current (Itemp) (Based on Temperature rise)                   | 2530mA       |
| Max. of DC resistance   | 0.022Ω       |
| Q (min.)  | 30           |
| Q test frequency  | 250MHz       |
| Self resonance frequency (min.)                                     | 15.5GHz      |
| Operating temperature range (Self-temperature rise is not included) | -55∼125°C    |
| Series  | LQW15AN_80   |

### 🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

1 of 3



In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Derating of Rated Current




### 🔔 Attention


This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

muRata Murata Manufacturing Co., Ltd.

# Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

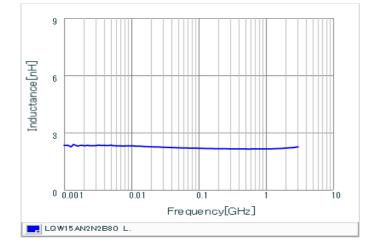

Inductance-Frequency characteristics (Typ.)

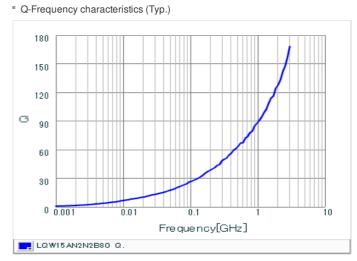

#### 🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.