

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	SP
Termination type	
IP rating	50
Cable Ø	4.00 - 5.20 mm
Matching parts	SKN.M16.NLLN
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	SA*: Straight plug, key (N) or keys (P, S and T), with black cable collet
Keying	3 keys (alpha=0, gamma=30, plug: male contacts, receptacle: female contacts)
Housing Material	Proprietary sulfone, black
Cable Fixing	∅ 4 - 5.2 mm
Variant	N : Black collet nut

### Performance

Configuration	
Insulator	
Rated Current	3.0 Amps


### Specifications

Test voltage (kV rms) Contact-contact:	0.75
Air clearance min. (mm) or Creepage distance min. (mm):	0.47

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

## DRAWINGS

### Draws

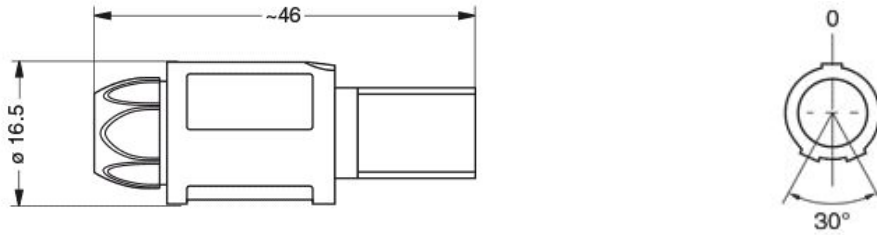

### Dimensions

	A	L
mm.	16.5	46
in.	0,65	1,81

## RECOMMENDED BY LEMO

### Tools

None

### Cables

120 222			
---------	--	--	--

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.