

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

### Download

[Request a quote](#)

[Catalog](#)

Series	SP
Termination type	
IP rating	50
Cable Ø	5.30 - 6.50 mm
Matching parts	SKN.M18.GLLG
Status	active
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	SA/Z*: Straight plug, key (N) or keys (P, S and T), with cable collet and nut for fitting a bend relief
Keying	3 keys (alpha=0, gamma=30, plug: male contacts, receptacle: female contacts)
Housing Material	Proprietary sulfone, gray
Cable Fixing	∅ 5.3 - 6.5 mm
Variant	GZ : Gray collet nut for bend relief

### Performance

Configuration	
Insulator	
Rated Current	2.5 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	0.75
Air clearance min. (mm) or Creepage distance min. (mm):	0.47

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


## Others

IP Rating: 50

---

# DRAWINGS

## Draws

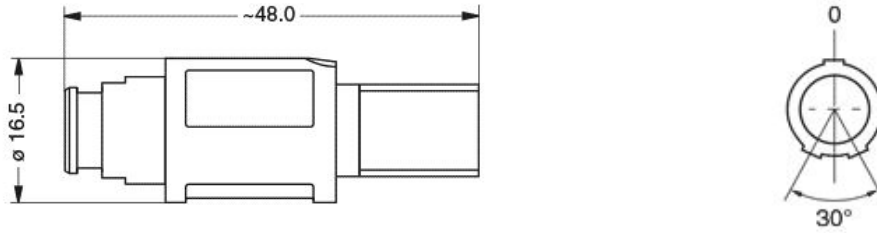

## Dimensions

	A	L
mm.	16.5	48
in.	0,65	1,89

---

# RECOMMENDED BY LEMO

## Tools

Crimp Tool: DPC.91.701.V

## Cables

130 222			
---------	--	--	--

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*