16-bit buffer/line driver; 5 V input/output tolerant; 3-stateRev. 14 — 15 June 2017Product data sheet

1 General description

The 74LVC16244A; 74LVCH16244A are 16-bit non-inverting buffer/line drivers with 3-state bus compatible outputs. The device can be used as four 4-bit buffers, two 8-bit buffers or one 16-bit buffer. It features four output enable inputs, $(1\overline{OE} \text{ to } 4\overline{OE})$ each controlling four of the 3-state outputs. A HIGH on $n\overline{OE}$ causes the outputs to assume a high-impedance OFF-state.

Inputs can be driven from either 3.3 V or 5 V devices. When disabled, up to 5.5 V can be applied to the outputs. These features allow the use of these devices in mixed 3.3 V and 5 V applications.

The 74LVCH16244A bus hold on data inputs eliminates the need for external pull-up resistors to hold unused inputs.

2 Features and benefits

- 5 V tolerant inputs/outputs for interfacing with 5 V logic
- Wide supply voltage range from 1.2 V to 3.6 V
- CMOS low power consumption
- · Multibyte flow-through standard pin-out architecture
- · Low inductance multiple power and ground pins for minimum noise and ground bounce

ne<mark>x</mark>peria


- Direct interface with TTL levels
- High-impedance when $V_{CC} = 0 V$
- All data inputs have bus hold. (74LVCH16244A only)
- · Complies with JEDEC standard:
 - JESD8-7A (1.65 V to 1.95 V)
 - JESD8-5A (2.3 V to 2.7 V)
 - JESD8-C/JESD36 (2.7 V to 3.6 V)
- ESD protection:
 - HBM JESD22-A114F exceeds 2000 V
 - MM JESD22-A115-B exceeds 200 V
 - CDM JESD22-C101E exceeds 1000 V
- Specified from -40 °C to +85 °C and -40 °C to +125 °C

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

3 Ordering information


Table 1. Ordering info	Table 1. Ordering information						
Type number	Temperature	Package					
	range	Name	Description	Version			
74LVC16244ADL	-40 °C to +125 °C	SSOP48	plastic shrink small outline package; 48 leads;	SOT370-1			
74LVCH16244ADL	-		body width 7.5 mm				
74LVC16244ADGG	-40 °C to +125 °C	TSSOP48	plastic thin shrink small outline package;	SOT362-1			
74LVCH16244ADGG	-		48 leads; body width 6.1 mm				
74LVC16244AEV	-40 °C to +125 °C	VFBGA56	plastic very thin fine-pitch ball grid array package;	e; SOT702-1			
74LVCH16244AEV	-		56 balls; body 4.5 x 7 x 0.65 mm				
74LVC16244ABX	-40 °C to +125 °C	HXQFN60	plastic compatible thermal enhanced extremely	SOT1134-2			
74LVCH16244ABX			thin quad flat package; no leads; 60 terminals; body 4 x 6 x 0.5 mm				

4 Functional diagram

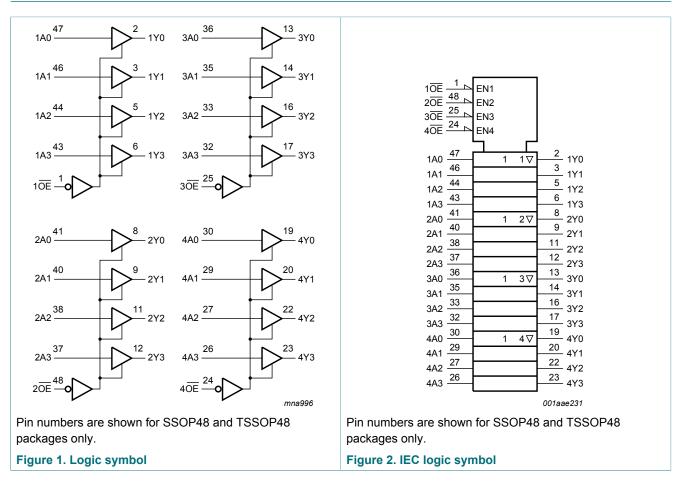


74LVC16244A; 74LVCH16244A

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

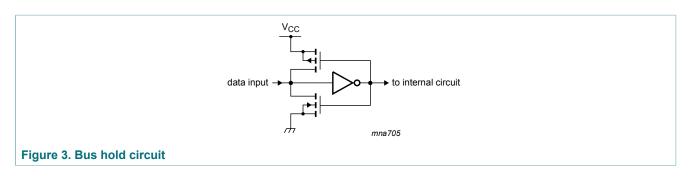

5 Pinning information

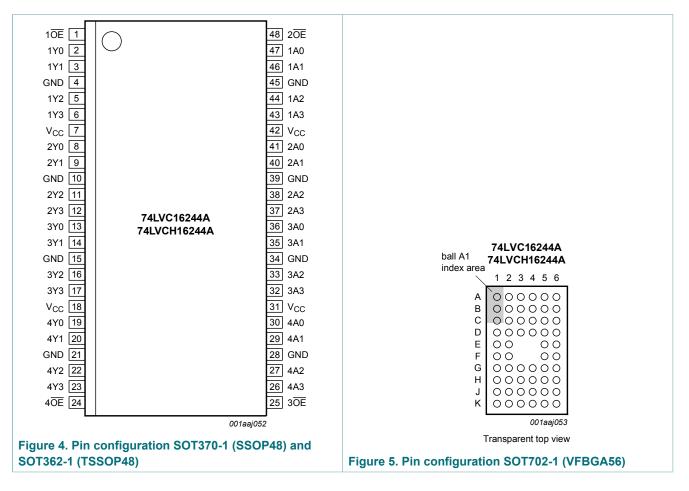

5.1 Pinning

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

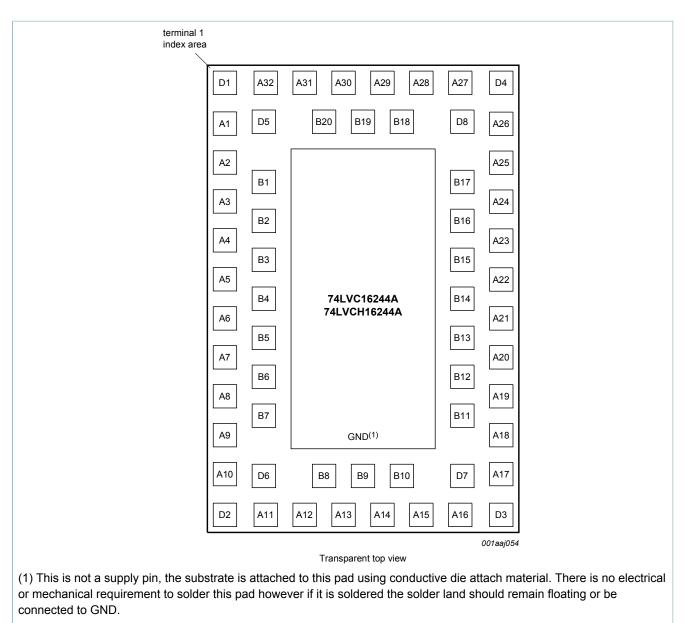


Figure 6. Pin configuration SOT1134-2 (HXQFN60)

5.2 Pin description

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

Symbol	Pin			Description	
	SOT370-1 and SOT362-1	SOT702-1	SOT1134-2		
10E, 20E, 30E, 40E	1, 48, 25, 24	A1, A6, K6, K1	A30, A29, A14, A13	output enable input (active LOW)	
1Y0 to 1Y3	2, 3, 5, 6	B2, B1, C2, C1	B20, A31, D5, D1	data output	
2Y0 to 2Y3	8, 9, 11, 12	D2, D1, E2, E1	A2, B2, B3, A5	data output	
3Y0 to 3Y3	13, 14, 16, 17	F1, F2, G1, G2	A6, B5, B6, A9	data output	
4Y0 to 4Y3	19, 20, 22, 23	H1, H2, J1, J2	D2, D6, A12, B8	data output	
GND	4, 10, 15, 21, 28,34, 39, 45	B3, B4, D3, D4, G3, G4, J3, J4	A32, A3, A8, A11, A16, A19, A24, A27	ground (0 V)	
V _{CC}	7, 18, 31, 42	C3, C4, H3, H4	A1, A10, A17, A26	supply voltage	
1A0 to 1A3	47, 46, 44, 43	B5, B6, C5, C6	B18, A28, D8, D4	data input	
2A0 to 2A3	41, 40, 38, 37	D5, D6, E5, E6	A25, B16, B15, A22	data input	
3A0 to 3A3	36, 35, 33, 32	F6, F5, G6, G5	A21, B13, B12, A18	data input	
4A0 to 4A3	30, 29, 27, 26	H6, H5, J6, J5	D3, D7, A15, B10	data input	
n.c.	-	A2, A3, A4, A5, K2, K3,K4, K5	A4, A7, A20, A23, B1,B4, B7, B9, B11, B14,B17, B19	not connected	

6 Functional description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.

Control	Input	Output
n <mark>OE</mark>	nAn	nYn
L	L	L
L	Н	Н
Н	X	Z

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

Limiting values 7

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Мах	Unit
V _{CC}	supply voltage			-0.5	+6.5	V
I _{IK}	input clamping current	V ₁ < 0 V		-50	-	mA
VI	input voltage		[1]	-0.5	+6.5	V
I _{OK}	output clamping current	$V_{\rm O}$ > $V_{\rm CC}$ or $V_{\rm O}$ < 0 V		-	±50	mA
Vo	output voltage	output HIGH or LOW	[2]	-0.5	V _{CC} + 0.5	V
		output 3-state	[2]	-0.5	+6.5	V
l _O	output current	V_{O} = 0 V to V_{CC}		-	±50	mA
I _{CC}	supply current			-	100	mA
I _{GND}	ground current			-100	-	mA
T _{stg}	storage temperature			-65	+150	°C
P _{tot}	total power dissipation	T _{amb} = -40 °C to +125 °C;				
		(T)SSOP48 package	[3]	-	500	mW
		VFBGA56 package	[4]	-	1 000	mW
		HXQFN60 package	[4]	-	1 000	mW

The minimum input voltage ratings may be exceeded if the input current ratings are observed. The output voltage ratings may be exceeded if the output current ratings are observed. Above 60 °C the value of P_{tot} derates linearly with 5.5 mW/K. Above 70 °C the value of P_{tot} derates linearly with 1.8 mW/K. [1] [2]

[3] [4]

Recommended operating conditions 8

Table 5. Recommended operating conditions

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V _{CC}	supply voltage		1.65	-	3.6	V
		functional	1.2	-	3.6	V
VI	input voltage		0	-	5.5	V
Vo	output voltage	output HIGH or LOW	0	-	V _{CC}	V
		output 3-state	0	-	5.5	V
T _{amb}	ambient temperature	in free air	-40	-	+125	°C
Δt/ΔV	input transition rise and fall rate	V _{CC} = 1.2 V to 2.7 V	0	-	20	ns/V
		V _{CC} = 2.7 V to 3.6 V	0	-	10	ns/V

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

Static characteristics 9

Table 6. Static characteristics

At recommended operating conditions. Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	-40	°C to +8	5 °C	-40 °C to +125 °C		Unit
			Min	Typ ^[1]	Max	Min	Мах	
V _{IH}	HIGH-level input	V _{CC} = 1.2 V	1.08	-	-	1.08	-	V
	voltage	V _{CC} = 1.65 V to 1.95 V	$0.65V_{CC}$	-	-	0.65V _{CC}	-	V
		V _{CC} = 2.3 V to 2.7 V	1.7	-	-	1.7	-	V
		V _{CC} = 2.7 V to 3.6 V	2.0	-	-	2.0	-	V
VIL	LOW-level input	V _{CC} = 1.2 V	-	-	0.12	-	0.12	V
	voltage	V _{CC} = 1.65 V to 1.95 V	-	-	$0.35V_{CC}$	-	$0.35V_{CC}$	V
		V_{CC} = 2.3 V to 2.7 V	-	-	0.7	-	0.7	V
		V _{CC} = 2.7 V to 3.6 V	-	-	0.8	-	0.8	V
V _{OH}	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}$						
	output voltage	I _O = -100 μA; V _{CC} = 1.65 V to 3.6 V	V _{CC} -0.2	-	-	V _{CC} -0.3	-	V
		I _O = -4 mA; V _{CC} = 1.65 V	1.2	-	-	1.05	-	V
		I _O = -8 mA; V _{CC} = 2.3 V	1.8	-	-	1.65	-	V
	I_{O} = -12 mA; V_{CC} = 2.7 V	2.2	-	-	2.05	-	V	
		I _O = -18 mA; V _{CC} = 3.0 V	2.4	-	-	2.25	-	V
		I_{O} = -24 mA; V_{CC} = 3.0 V	2.2	-	-	2.0	-	V
V _{OL}	LOW-level	$V_{I} = V_{IH} \text{ or } V_{IL}$						
	output voltage	I _O = 100 μA; V _{CC} = 1.65 V to 3.6 V	-	-	0.2	-	0.3	V
		I _O = 4 mA; V _{CC} = 1.65 V	-	-	0.45	-	0.65	V
		I _O = 8 mA; V _{CC} = 2.3 V	-	-	0.6	-	0.8	V
		I _O = 12 mA; V _{CC} = 2.7 V	-	-	0.4	-	0.6	V
		I _O = 24 mA; V _{CC} = 3.0 V	-	-	0.55	-	0.8	V
I _I	input leakage current	V _{CC} = 3.6 V; V _I = 5.5 V or GND	-	±0.1	±5	-	±20	μA
I _{OZ}	OFF-state output current ^[2]	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 3.6 \text{ V};$ $V_{O} = 5.5 \text{ V or GND};$	-	±0.1	±5	-	±20	μA
I _{OFF}	power-off leakage current	V_{CC} = 0 V; V _I or V _O = 5.5 V	-	±0.1	±10	-	±20	μA
I _{CC}	supply current	V_{CC} = 3.6 V; I _O = 0 A; V _I = V _{CC} or GND	-	0.1	20	-	80	μA
ΔI _{CC}	additional supply current	per input pin; $V_{CC} = 2.7 V \text{ to } 3.6 V;$ $V_{I} = V_{CC} - 0.6 V; I_{O} = 0 A$	-	5	500	-	5 000	μA

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

Symbol	Parameter	Conditions	-40	°C to +8	5 °C	-40 °C to	Unit	
			Min	Typ ^[1]	Мах	Min	Мах	
CI	input capacitance	V_{CC} = 0 V to 3.6 V; V _I = GND to V _{CC}	-	5.0	-	-	-	pF
I _{BHL}	bus hold LOW	V _{CC} = 1.65; V _I = 0.58 V	10	-	-	10	-	μA
	current ^{[3][4]}	V _{CC} = 2.3; V _I = 0.7 V	30	-	-	25	-	μA
		V _{CC} = 3.0; V _I = 0.8 V	75	-	-	60	_	μA
I _{BHH}	I _{BHH} bus hold HIGH	V _{CC} = 1.65; V _I = 1.07 V	-10	-	-	-10	-	μA
	current ^{[3][4]}	V _{CC} = 2.3; V _I = 1.7 V	-30	-	-	-25	-	μA
		V _{CC} = 3.0; V _I = 2.0 V	-75	-	-	-60	-	μA
I _{BHLO}	bus hold LOW	V _{CC} = 1.95 V	200	-	-	200	_	μA
	overdrive current ^{[3][5]}	V _{CC} = 2.7 V	300	-	-	300	-	μA
		V _{CC} = 3.6 V	500	-	-	500	-	μA
I _{BHHO}	-	V _{CC} = 1.95 V	-200	-	-	-200	-	μA
	overdrive current ^{[3][5]}	V _{CC} = 2.7 V	-300	-	-	-300	-	μA
		V _{CC} = 3.6 V	-500	-	-	-500	-	μA

All typical values are measured at V_{CC} = 3.3 V and T_{amb} = 25 °C. [1]

[2] [3] The bus hold circuit is switched off when $V_I > V_{CC}$ allowing 5.5 V on the input terminal.

Valid for data inputs only. Control inputs do not have a bus hold circuit.

[4] [5] The specified sustaining current at the data input holds the input below the specified V_I level.

The specified overdrive current at the data input forces the data input to the opposite logic input state.

10 Dynamic characteristics

Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V). For test circuit see Figure 9.

Symbol	Parameter	Conditions	-40	°C to +8	5 °C	-40 °C to	+125 °C	Unit
			Min	Typ ^[1]	Max	Min	Max	
t _{pd}	propagation	nAn to nYn; see <u>Figure 7</u> ^[2]						
	delay	V _{CC} = 1.2 V	-	11.0	-	-	-	ns
		V _{CC} = 1.65 V to 1.95 V	1.5	4.8	10.7	1.5	11.3	ns
		V _{CC} = 2.3 V to 2.7 V	1.0	2.6	5.3	1.0	5.9	ns
		V _{CC} = 2.7 V	1.0	2.6	4.7	1.0	6.0	ns
		V _{CC} = 3.0 V to 3.6 V	1.1	2.2	4.1	1.1	5.5	ns
t _{en}	enable time	nOE to nYn; see Figure 8 [2]						
		V _{CC} = 1.2 V	-	15.0	-	-	-	ns
		V _{CC} = 1.65 V to 1.95 V	1.5	6.2	12.1	1.5	12.7	ns
		V _{CC} = 2.3 V to 2.7 V	1.0	3.5	6.4	1.0	7.1	ns
		V _{CC} = 2.7 V	1.0	3.3	5.8	1.0	7.5	ns
		V _{CC} = 3.0 V to 3.6 V	1.0	2.8	4.6	1.0	6.0	ns

74LVC16244A; 74LVCH16244A

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

Symbol	Parameter	Conditions		-40	°C to +8	5 °C -40 °C to +125 °C			Unit
				Min	Typ ^[1]	Max	Min	Max	
t _{dis}	disable time	n OE to nYn; see <u>Figure 8</u>	[2]						
		V _{CC} = 1.2 V		-	10.0	-	-	-	ns
		V _{CC} = 1.65 V to 1.95 V		2.5	4.4	8.7	2.5	9.4	ns
		V _{CC} = 2.3 V to 2.7 V		1.0	2.4	4.9	1.0	5.3	ns
		V _{CC} = 2.7 V		1.0	3.2	6.2	1.0	8.0	ns
		V _{CC} = 3.0 V to 3.6 V		1.8	3.1	5.2	1.8	6.5	ns
C _{PD}	power	per input; V_I = GND to V_{CC}	[3]						
	dissipation capacitance	V _{CC} = 1.65 V to 1.95 V		-	4.8	-	-	-	pF
		V_{CC} = 2.3 V to 2.7 V		-	8.3	-	-	-	pF
		V _{CC} = 3.0 V to 3.6 V		-	11.4	-	-	-	pF

[1] [2] Typical values are measured at T_{amb} = 25 °C and V_{CC} = 1.2 V, 1.8 V, 2.5 V, 2.7 V and 3.3 V respectively.

 t_{pd} is the same as t_{PLH} and $t_{\text{PHL}}.$

t_{en} is the same as t_{PZL} and t_{PZH}.


 t_{dis} is the same as t_{PLZ} and t_{PHZ} . \widetilde{C}_{PD} is used to determine the dynamic power dissipation (P_D in μ W). [3] $P_{D} = C_{PD} \times V_{CC}^{2} \times f_{i} \times N + \sum (C_{L} \times V_{CC}^{2} \times f_{o}) \text{ where:}$ f_i = input frequency in MHz; f_o = output frequency in MHz C_L = output load capacitance in pF

V_{CC} = supply voltage in Volts

N = number of inputs switching

 $\Sigma(C_L \times V_{CC}^2 \times f_0)$ = sum of the outputs.

10.1 Waveforms and test circuit



Measurement points are given in Table 8.

Logic levels: V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Figure 7. The input (nAn) to output (nYn) propagation delays

74LVC16244A; 74LVCH16244A

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

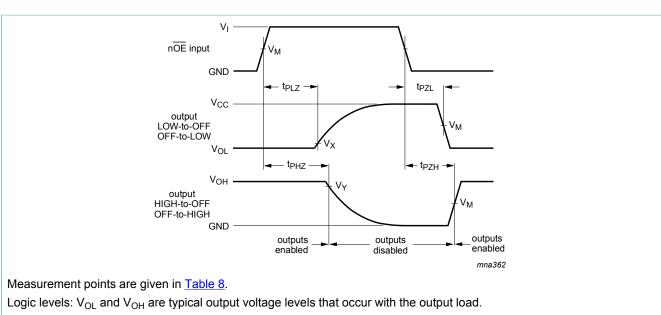


Figure 8. 3-state enable and disable times

Supply voltage	V _M	Input			
V _{cc}		VI	$t_r \equiv t_f$	V _X	V _Y
1.2 V	$0.5 \times V_{CC}$	V _{CC}	≤ 2.5 ns	V _{OL} + 0.15 V	V _{OH} - 0.15 V
1.65 V to 1.95 V	$0.5 \times V_{CC}$	V _{CC}	≤ 2.5 ns	V _{OL} + 0.15 V	V _{OH} - 0.15 V
2.3 V to 2.7 V	$0.5 \times V_{CC}$	V _{CC}	≤ 2.5 ns	V _{OL} + 0.15 V	V _{OH} - 0.15 V
2.7 V	1.5 V	2.7 V	≤ 2.5 ns	V _{OL} + 0.3 V	V _{OH} - 0.3 V
3.0 V to 3.6 V	1.5 V	2.7 V	≤ 2.5 ns	V _{OL} + 0.3 V	V _{OH} - 0.3 V

74LVC16244A; 74LVCH16244A

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

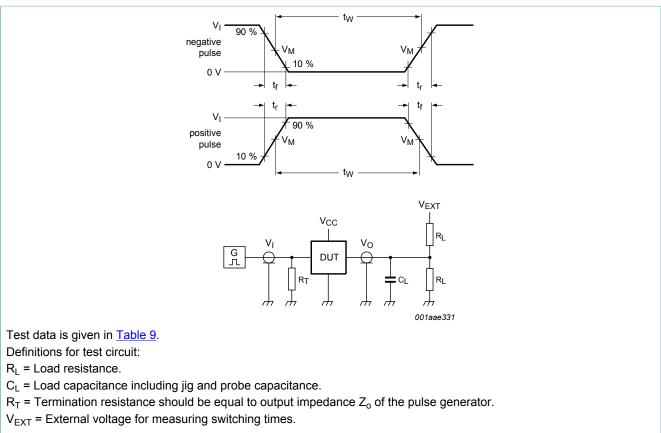



Figure 9. Test circuit for measuring switching times

Supply voltage	Input		Load		V _{EXT}		
	VI	t _r , t _f	CL	RL	t _{PLH} , t _{PHL}	t _{PLZ} , t _{PZL}	t _{PHZ} , t _{PZH}
1.2 V	V _{CC}	≤ 2 ns	30 pF	1 kΩ	open	$2 \times V_{CC}$	GND
1.65 V to 1.95 V	V _{CC}	≤ 2 ns	30 pF	1 kΩ	open	$2 \times V_{CC}$	GND
2.3 V to 2.7 V	V _{CC}	≤ 2 ns	30 pF	500 Ω	open	$2 \times V_{CC}$	GND
2.7 V	2.7 V	≤ 2.5 ns	50 pF	500 Ω	open	$2 \times V_{CC}$	GND
3.0 V to 3.6 V	2.7 V	≤ 2.5 ns	50 pF	500 Ω	open	$2 \times V_{CC}$	GND


74LVC_LVCH16244A

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

11 Package outline

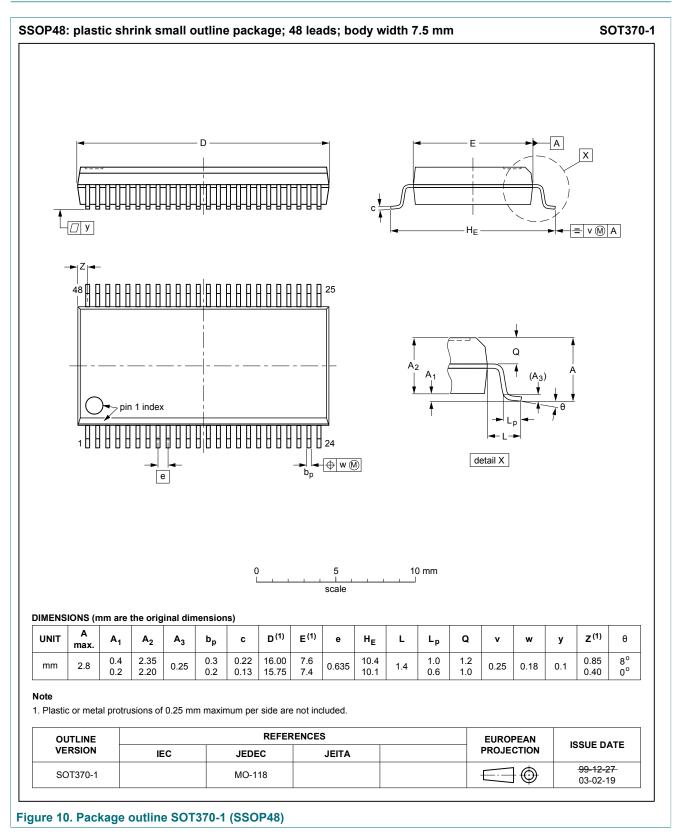

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

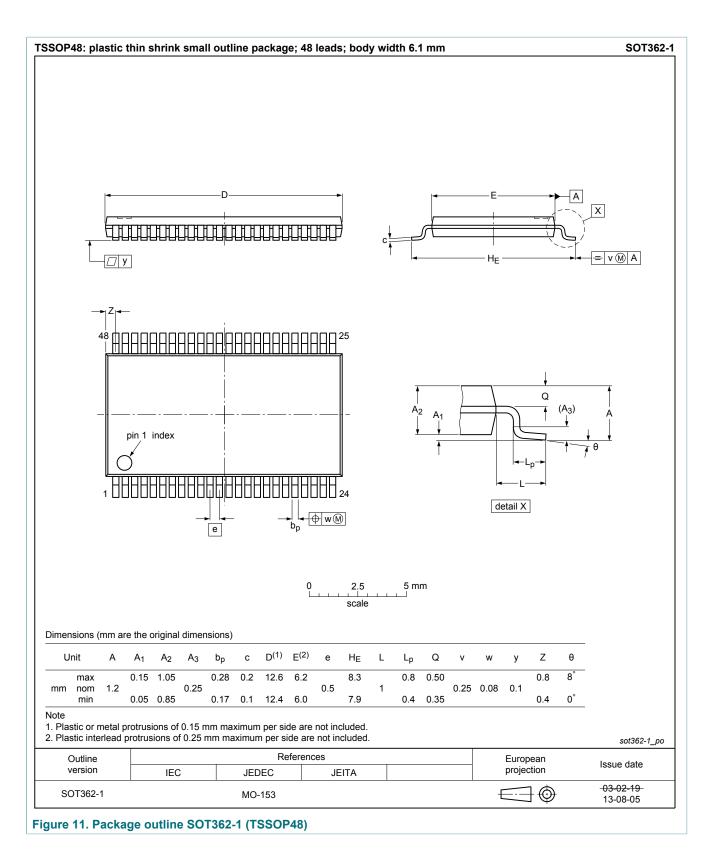

74LVC_LVCH16244A

74LVC16244A; 74LVCH16244A

16-bit buffer/line driver; 5 V input/output tolerant; 3-state


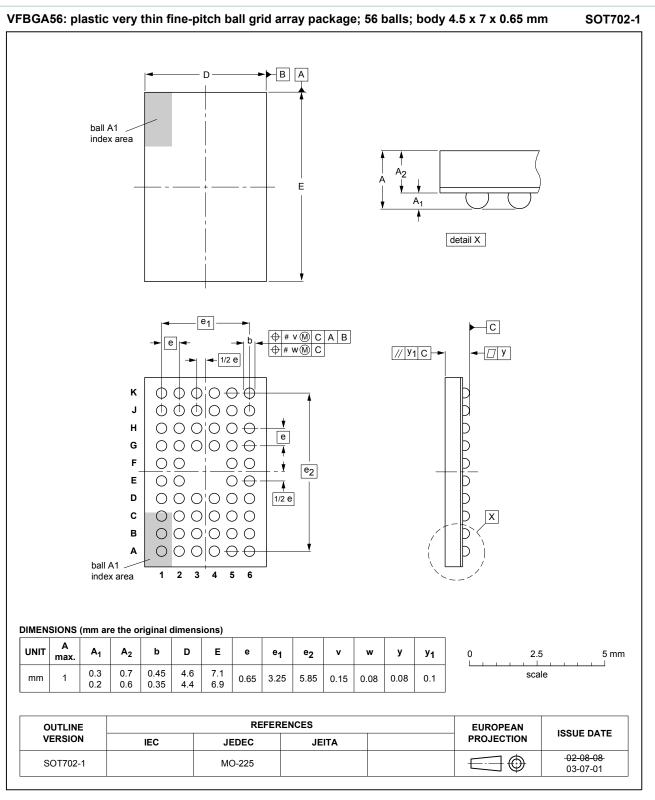


Figure 12. Package outline SOT702-1 (VFBGA56)

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

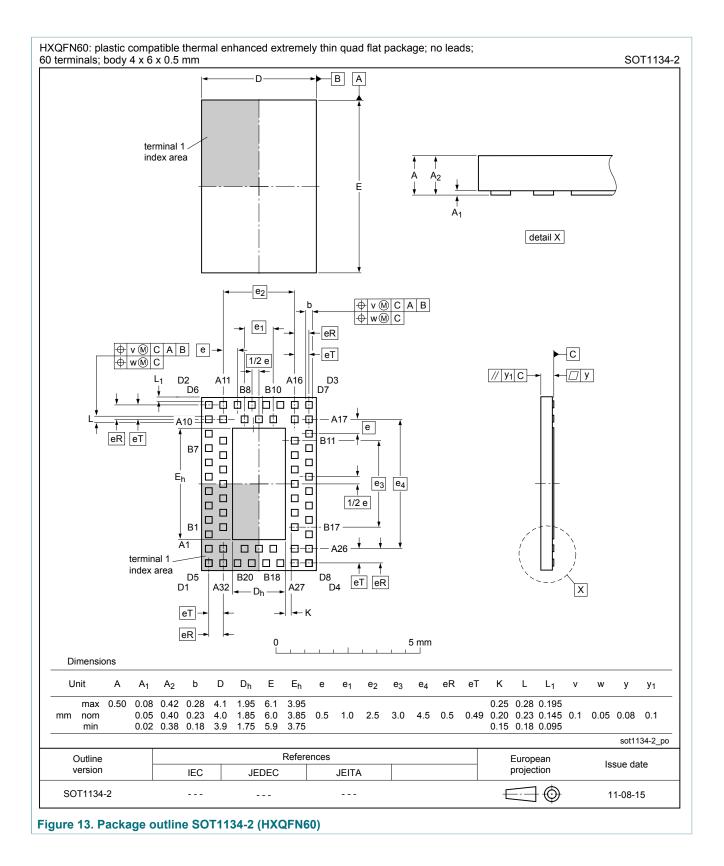

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

12 Abbreviations

Table 10. Abbreviations					
Acronym	Description				
CDM	Charged Device Model				
CMOS	mplementary Metal Oxide Semiconductor				
DUT	Device Under Test				
ESD	ElectroStatic Discharge				
НВМ	Human Body Model				
MM	Machine Model				
TTL	Transistor-Transistor Logic				

13 Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes		
74LVC_LVCH16244A v.14	20170615	Product data sheet	-	74LVC_LVCH16244A v.13		
Modifications:	 The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia. Legal texts have been adapted to the new company name where appropriate. Figure 1 updated. 					
74LVC_LVCH16244A v.13	20140207	Product data sheet	-	74LVC_LVCH16244A v.12		
Modifications:	Table 5: Minimum V _{CC} changed from 2.3 V to 1.65 V (errata).					
74LVC_LVCH16244A v.12	20120305	Product data sheet	-	74LVC_LVCH16244A v.11		
74LVC_LVCH16244A v.11	20111027	Product data sheet	-	74LVC_LVCH16244A v.10		
74LVC_LVCH16244A v.10	20110429	Product data sheet	-	74LVC_LVCH16244A v.9		
74LVC_LVCH16244A v.9	20100318	Product data sheet	-	74LVC_LVCH16244A v.8		
74LVC_LVCH16244A v.8	20081117	Product data sheet	-	74LVC_LVCH16244A v.7		
74LVC_LVCH16244A v.7	20031208	Product specification	-	74LVC_LVCH16244A v.6		
74LVC_LVCH16244A v.6	20030130	Product specification	-	74LVC_LVCH16244A v.5		
74LVC_LVCH16244A v.5	20021030	Product specification	-	74LVC_H16244A v.4		
74LVC_H16244A v.4	19971028	Product specification	-	74LVC16244A_ 74LVCH16244A v.3		
74LVC16244A_ 74LVCH16244A v.3	19971028	Product specification	-	74LVC16244A v.2		
74LVC16244A v.2	19970630	Product specification	-	74LVC16244A v.1		
74LVC16244A v.1	-	-	-	-		

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

14 Legal information

14.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

Please consult the most recently issued document before initiating or completing a design. [1]

The term 'short data sheet' is explained in section "Definitions".

[2] [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

14.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

14.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia

Right to make changes - Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use - Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale - Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer

No offer to sell or license - Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer

design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

16-bit buffer/line driver; 5 V input/output tolerant; 3-state

Contents

1	General description	1
2	Features and benefits	1
3	Ordering information	2
4	Functional diagram	2
5	Pinning information	3
5.1	Pinning	
5.2	Pin description	4
6	Functional description	
7	Limiting values	
8	Recommended operating conditions	
9	Static characteristics	7
10	Dynamic characteristics	8
10.1	Waveforms and test circuit	
11	Package outline	
12	Abbreviations	
13	Revision history	
14	Legal information	

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2017.

All rights reserved.

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 15 June 2017 Document identifier: 74LVC_LVCH16244A