


Pitch

Width

Pitch

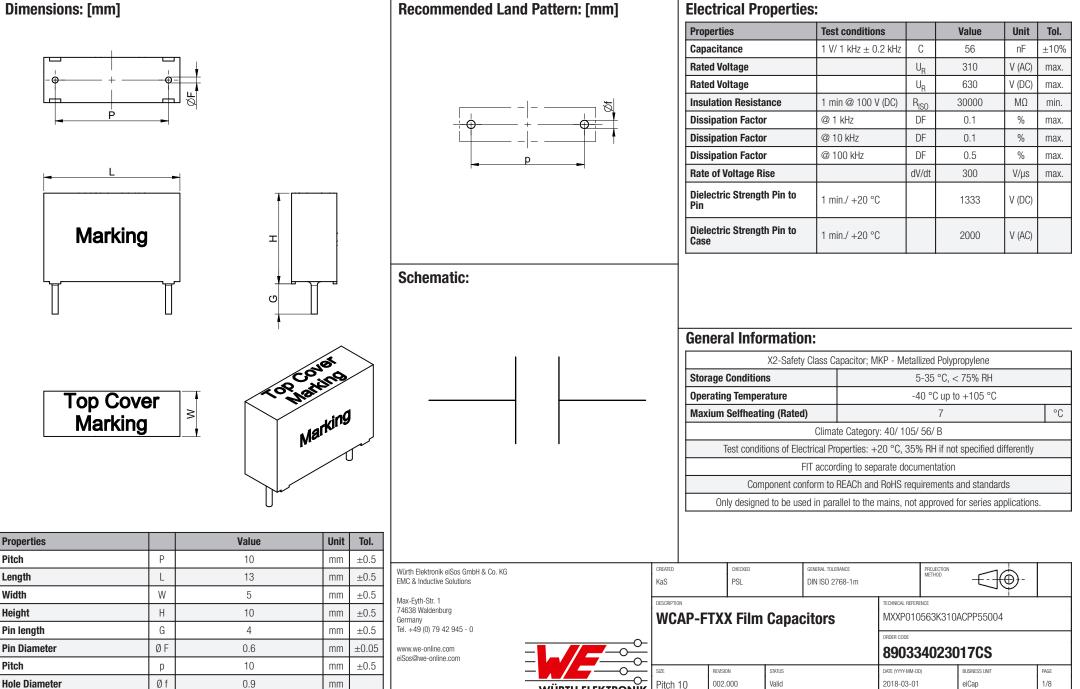

This electronic component has been designed and developed for usage in general electronic equipment only. This product is neasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG products are neither designed or intended for use in areas such as military, aerospace, aviation, nuclear control, ship control, train control, ship cont

WÜRTH ELEKTRONIK

## **Product Marking:**

| 1 <sup>st</sup> Line right   | Matchcode: FTXX                                   |
|------------------------------|---|
| 2 <sup>nd</sup> Line right   | Rated Voltage: 310 V~                             |
| 3 <sup>rd</sup> Line right   | Climate Category: 40/ 105/ 56/ B                  |
| 2 <sup>nd</sup> Line left    | Capacitance & Tolerance Code: 563K (Basis pF)     |
| Bottom Line                  | Certificates: ENEC, cULUS, CQC & Internal Marking |
| Top Cover Marking P < 15     | Date Code: YWW                                    |
| Top Cover Marking $P \ge 15$ | Date Code & Capacitance & Tolerance Code          |

### **Certification:**

| Properties                                     | Standard     | File        |
|--|--------------|-------------|
| ENEC10 by VDE                                  | IEC 60384-14 | 40038405    |
| <b>cULus</b> UL 60384-14 / CAN/CSA - E60384-14 |              | E345659     |
| CQC  | IEC 60384-14 | 13001104051 |

## **Mechanical Properties:**

| Properties             | Test Conditions     |           | Lead Diameter [mm]        | Force [N] | condition     |
|------------------------|---------------------|-----------|---------------------------|-----------|---------------|
| Termination Robustness | IEC 600668 - 2 - 21 | Pull Test | $0.5 \text{ to} \le 0.8$  | 10        | min. 10 sec.  |
|                        |                     |           | $0.9 \text{ to} \le 1.25$ | 20        | min. 10 sec.  |
|                        |                     | Bend Test | $0.5 \text{ to} \le 0.8$  | 5         | min. 2 cycles |
|                        |                     |           | $0.9 \text{ to} \le 1.25$ | 10        | min. 2 cycles |


## **Environmental Tests:**

| Properties              | Standard          |  |  |  |  |  |
|-------------------------|-------------------|--|--|--|--|--|
| Active<br>Flammability  | IEC 60384-14      | max. 24 surge pulses @ 2.5 kV (one pulse every 5 seconds)                      |  |  |  |  |
| Passive<br>Flammability | IEC 60384-14      | in combination with IEC 60381 - 1 & IEC 60695 - 11 - 5                         |  |  |  |  |
| Vibration               | IEC 60068 - 2 - 6 | all 3 directions, 2 hours each @ 10 - 55 - 10 Hz, amplitude 0.75 mm or 10 g $$ |  |  |  |  |

| Properties                | Standard           |   |
|---------------------------|--------------------|---|
| Damp Heat                 | IEC 60068 - 2 - 78 | 40°C, 95% RH, 56 days   |
| Temperature<br>Cycles     | IEC 60068 - 2 - 14 | 5 cycles, upper and lower temperature 30 min. each, 30 sec. transfer time |
| Charge/<br>Discharge Test | IEC 60384 - 14     | √2 x UR @ 100 V/µs  |
| Surge Test                | IEC 60384 - 14     | 2.5 kV Surge impulses   |


|  |                |                           |          |                                      |                |  |    |               | _    |
|--|----------------|---------------------------|----------|--------------------------------------|----------------|--|----|---------------|------|
| Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions               | CREATED<br>KaS | CHECKED<br>PSL            |          | GENERAL TOLERANCE<br>DIN ISO 2768-1m |                | PROJECTION<br>METHOD                           |    |               |      |
| Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany<br>Tel. +49 (0) 79 42 945 - 0 |                | WCAP-FTXX Film Capacitors |          |                                      |                | TECHNICAL REFERENCE<br>MXXP010563K310ACPP55004 |    |               |      |
| www.we-online.com  |                |                           |          |                                      |                |  |    |               |      |
| eiSos@we-online.com  |                |                           |          |                                      | 890334023017CS |  |    |               |      |
| —  |                | SIZE                      | REVISION | STATUS                               |                | DATE (YYYY-MM-DD                               | J) | BUSINESS UNIT | PAGE |
| _  |                | Pitch 10                  | 002.000  | Valid                                |                | 2018-03-01                                     |    | eiCap         | 2/8  |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety restriction. Quipment of were leactrical cruited because severe personal injury or death, unless the parties have executed an agreement specifically governing such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in the require injury and reliability relations or performance.

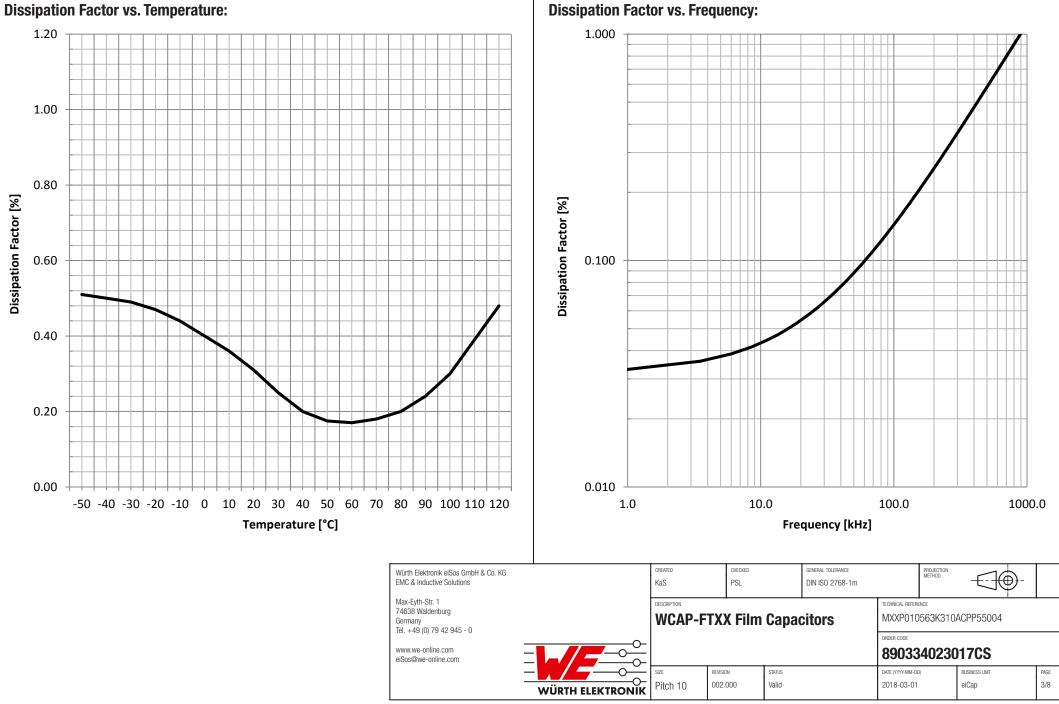


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in effectival crustel severation (automotive control, train control, ship control), train control, ship control, train control, ship cont

### **Dissipation Factor vs. Frequency:**

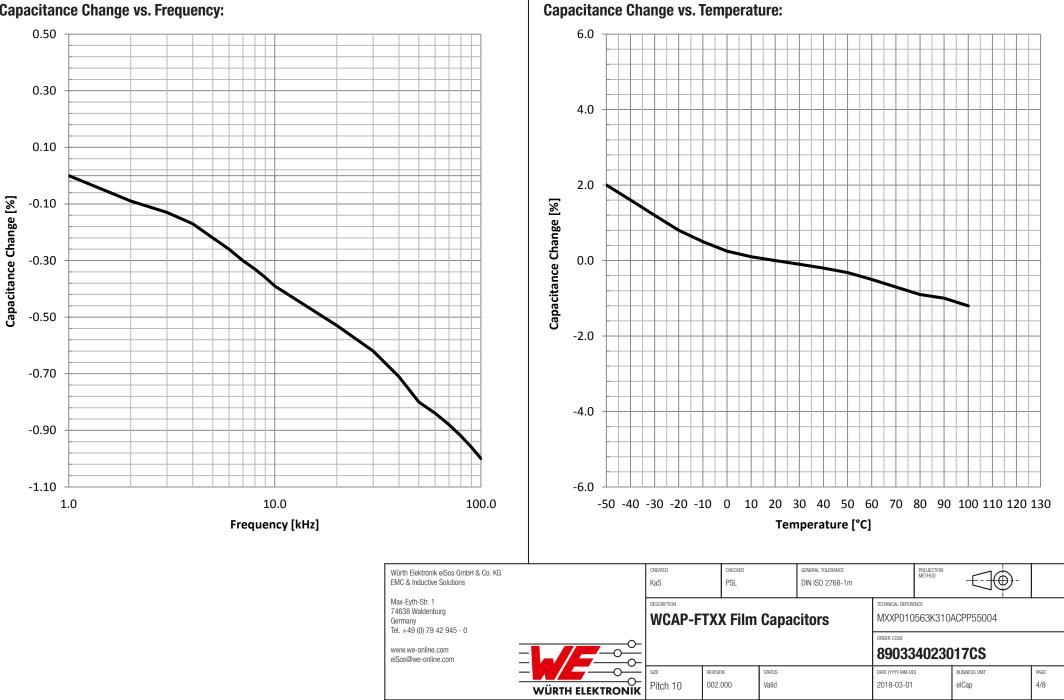


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in effectival crustel severation (automotive control, train control, ship control), train control, ship control, train control, ship cont

## **Capacitance Change vs. Frequency:**

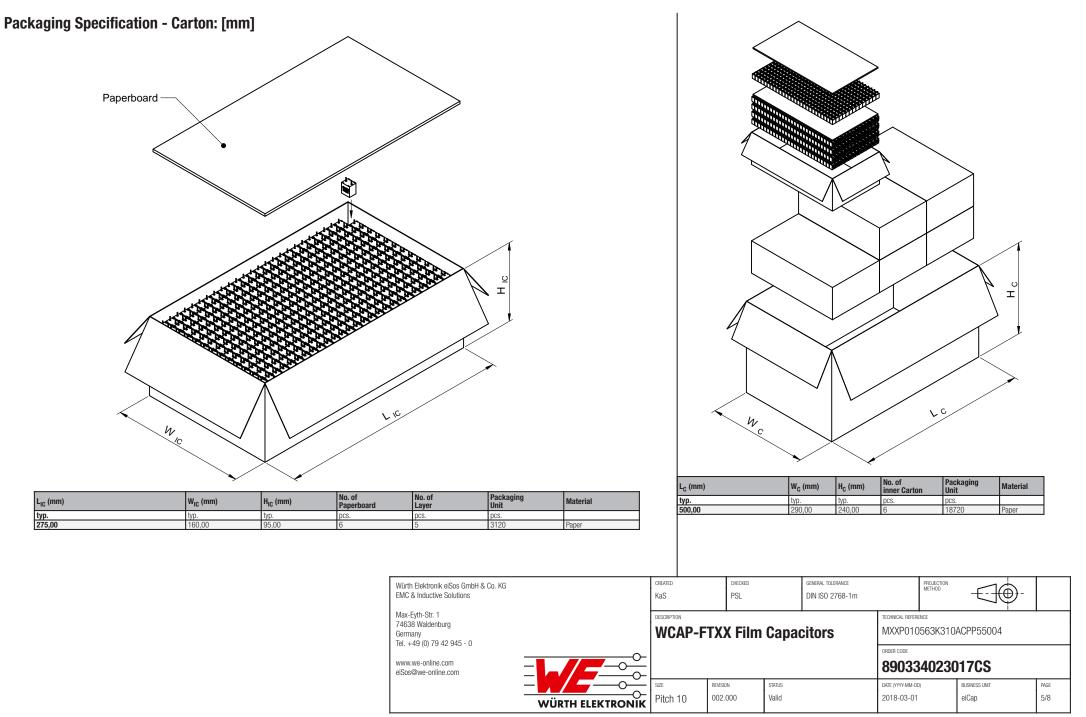

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel


## **Classification Wave Soldering Profile:**

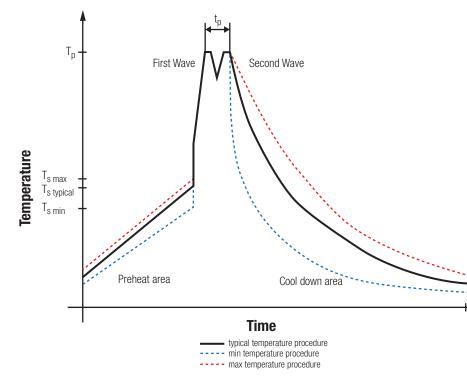

## **Classification Wave Soldering Profile:**

| Profile Feature                                    |                        | Pb-Free Assembly                            | Sn-Pb Assembly                              |
|--|------------------------|---|---|
| Preheat Temperature Min                            | T <sub>s min</sub>     | 100 °C                                      | 100 °C                                      |
| Preheat Temperature Typical                        | T <sub>s typical</sub> | 120 °C                                      | 120 °C                                      |
| Preheat Temperature Max                            | T <sub>s max</sub>     | 130 °C                                      | 130 °C                                      |
| Preheat Time $t_s$ from $T_{s min}$ to $T_{s max}$ | t <sub>s</sub>         | 70 seconds                                  | 70 seconds                                  |
| Ramp-up Rate                                       | ΔT                     | 150 °C max.                                 | 150 °C max.                                 |
| Peak temperature                                   | Т <sub>р</sub>         | 250 °C - 260 °C                             | 235 °C - 260 °C                             |
| Time of actual peak temperature                    | tp                     | max. 10 seconds<br>max. 5 seconds each wave | max. 10 seconds<br>max. 5 seconds each wave |
| Ramp-down Rate, Min                                |                        | ~ 2 K/ second                               | ~ 2 K/ second                               |
| Ramp-down Rate, Typical                            |                        | ~ 3.5 K/ second                             | ~ 3.5 K/ second                             |
| Ramp-down Rate, Max                                |                        | ~ 5 K/ second                               | ~ 5 K/ second                               |
| Time 25°C to 25°C                                  |                        | 4 minutes                                   | 4 minutes                                   |

refer to EN61760-1:2006

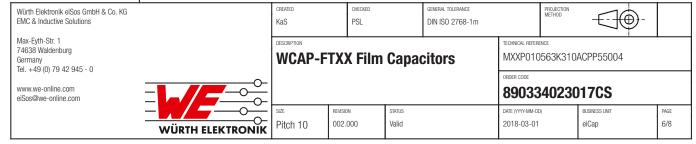

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equivalent is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information network etc.. Wurth Elektronik elSos GmbH & Co KG must be information intended to use is electronic component which is used in electrical circuits there adjust high standard is especially caused in the electronic component which is used in electrical circuits there are electrical circuits th

## **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of WCAP-FTXX of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General:

The capacitor is engineered, designed and manufactured to be used within the datasheet specified values. Do not use the capacitor neither short term nor long term outside the specified values, which are given in the data sheet.

#### 2. Product specific:

Follow all instructions mentioned in the data sheet, especially:

- The soldering profile has to be complied with according to the technical reflow soldering specification, otherwise this will void the warranty.
- Wave soldering is only allowed after evaluation and approval.
- Do not exceed the lower and/ or upper specified temperature!
- Do not use the capacitor with other than specified voltage!
- Prevent any kind of mechanical stress to the capacitor terminals!
- Do not use the soldered capacitor on a PCB for any movement or transportation to avoid any tensile force to the capacitor!
- Do not apply any kind of flexural or compressive force onto soldered or unsoldered component!
- Prevent the capacitor surface from any damage or scratches with sharp edges (e.g. chassis, screwdrivers, pincers).
- The capacitor must be placed on a PCB while using the recommended drill hole pattern without changing of the specific lead pitch!
- Avoid any other than specified temperature and / or time conditions during soldering!
- Avoid any overload or conditions that are not specified in the capacitors datasheet!
- Avoid any water or heavy dust on capacitors surface which may cause electrical leakage, damage, overheating or corrosion!
- FTXX is not recommended to be used in ther series to mains application.

#### 3. Storage conditions:

These film capacitors must be stored in stable climatic conditions, which are listed within the general information on front of data sheet.

#### 4. Storage duration:

All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be ensured.

#### 5. Flammability:

Avoid any external energy or open fire (passive flammability).

#### 6. Vibration resistance:

Do not exceed the vibration limits given by IEC60068-2-6.

#### 7. Cleaning:

Do not use any other cleaning solvents for box-typed capacitors except: ethanol, isopropanol, n-propanol - water mixtures. After cleaning a drying process with temperatures not exceeding 65°C and not longer than 4 hours is mandatory to prevent any kind of electrical damage.

#### 8. Full covered or embedded capacitors in final applications:

If final assemblies will be placed completely in any plastic resin, physical, chemical and thermal influences must be considered. If any specific evaluation or test is necessary please contact the related Würth Elektronik Capacitor Business Division.

| Würth Elektronik eiSos GmbH & Co. KG<br>EMC & Inductive Solutions            |                        | CREATED<br>KaS   | CHECKED<br>PSL      |                 | GENERAL TOLERANCE<br>DIN ISO 2768-1m |                                | PROJECTION<br>METHOD |                        | -  |             |  |  |
|--|------------------------|------------------|---------------------|-----------------|--------------------------------------|--------------------------------|----------------------|------------------------|--|-------------|--|--|
| Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany<br>Tel. +49 (0) 79 42 945 - 0 | 338 Waldenburg<br>many |                  |                     |                 | WCAP-FTXX Film Capacitors            |                                |                      |                        | TECHNICAL REFERENCE<br>MXXP010563K310ACPP55004 |             |  |  |
| www.we-online.com<br>eiSos@we-online.com                                     |                        |                  |                     |                 | ORDER CODE                           | 40230                          | )17CS                |                        |  |             |  |  |
|  |                        | size<br>Pitch 10 | REVISION<br>002.000 | status<br>Valid |                                      | DATE (YYYY-MM-DE<br>2018-03-01 | ,                    | BUSINESS UNIT<br>eiCap |  | page<br>7/8 |  |  |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential tracium signal, advantine, transportation (automotive control, train control, ship control), train control, ship control, train control, train control, train control, ship control, train control, ship control, train control, trai

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

| Würth Elektronik eiSos GmbH & Co. KG<br>EMC & Inductive Solutions            |             | CREATED<br>KaS   | CHECKED<br>PSL      |                 | GENERAL TOLERANCE<br>DIN ISO 2768-1m |                                | PROJECTION<br>METHOD |                        |             |
|--|-------------|------------------|---------------------|-----------------|--------------------------------------|--------------------------------|----------------------|------------------------|-------------|
| Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany<br>Tel. +49 (0) 79 42 945 - 0 | DESCRIPTION | TXX Film         | Capa                | citors          | TECHNICAL REFER                      |                                | ACPP55004            |                        |             |
| www.we-online.com<br>eiSos@we-online.com                                     |             |                  |                     |                 | ORDER CODE                           | 40230                          | )17CS                |                        |             |
|  |             | size<br>Pitch 10 | REVISION<br>002.000 | status<br>Valid |                                      | DATE (YYYY-MM-DE<br>2018-03-01 | ))                   | BUSINESS UNIT<br>eiCap | PAGE<br>8/8 |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential submit and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be information intervork etc... Würth Elektronik elSos GmbH & Co KG must be information intervork etc... Würth Elektronik elSos GmbH & Co KG must be information component which is used in electrical circuits that require high state the require high state electrical circuits that require high state electrical circuits that