Cree® XLamp® CXB3050 LED



PRODUCT DESCRIPTION

The XLamp® CXB3050 LED Array is a member of the second generation of the CXA family that delivers up to 30% higher efficacy and up to 20% higher lumens than the first generation in the same LES. The higher performance second generation CXA LED Arrays provide a drop-in performance upgrade to existing CXA LED designs to shorten product development time. In addition, the CXB LEDs also allow lighting manufacturers to achieve the same or better performance with a smaller LES, enabling a smaller, more impactful luminaire. Available in 2-step, 3-step and 5-step EasyWhite® bins, the CXB3050 LED delivers high lumen output and high efficacy in a single, easy-to-use package that eliminates the need for reflow soldering.

The CX Family LED Design Guide provides basic information on the requirements to use the CXB3050 LED successfully in luminaire designs.

FEATURES

- · 23-mm optical source
- Mechanical and optical design consistent with other CXA30 and CXB30 LEDs
- Available in 70-, 80- and 90-minimum CRI options
- Cree EasyWhite® 2-, 3- and 5-step binning
- · Forward voltage option: 36-V class
- · 85 °C binning and characterization
- Extremely uniform color over viewing angle
- · Top-side solder connections
- Thermocouple attach point
- NEMA SSL-3 2011 standard flux bins
- · RoHS and REACh compliant
- UL® recognized component (E349212)

TABLE OF CONTENTS

Characteristics	2
Operating Limits	2
Flux Characteristics, EasyWhite® Order	
Codes and Bins	3
Relative Spectral Power Distribution	6
Electrical Characteristics	6
Relative Luminous Flux	7
Typical Spatial Distribution	8
Performance Groups - Brightness	8
Performance Groups - Chromaticity	9
Cree EasyWhite® Bins Plotted on the	
1931 CIE Color Space	10
Bin and Order Code Formats	11
Mechanical Dimensions	11
Thermal Design	12
Notes	13
Packaging	14





CHARACTERISTICS


Characteristics	Unit	Minimum	Typical	Maximum
Viewing angle (FWHM)	degrees		115	
ESD withstand voltage (HBM per Mil-Std-883D)	V			8000
DC forward current	mA			2500*
Reverse current	mA			0.1
Forward voltage (@ 1400 mA, $T_j = 85 ^{\circ}\text{C}$)	V		34.8	38

^{*} Refer to the Operating Limits section.

OPERATING LIMITS

The maximum current rating of the CXB3050 depends on the case temperature (Tc) when the LED has reached thermal equilibrium under steady-state operation. The graph shown below assumes that the system design employs good thermal management (thermal interface material and heat sink) and may vary when poor thermal management is employed. Please refer to the Mechanical Dimensions section on page 11 for the location of the Tc measurement point.

Another important factor in good thermal management is the temperature of the Light Emitting Surface (LES). Cree recommends a maximum LES temperature of 135 °C to ensure optimal LED lifetime. Please refer to the Thermal Design section on page 12 for more information on LES temperature measurement.

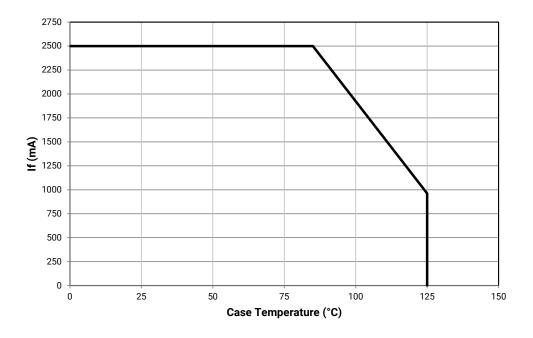



FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS (I_F = 1400 mA, T_I = 85 °C)

The following table provides order codes for XLamp CXB3050 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 11).

Nominal	CRI*		Minimum Luminous Flux		2-Step		3-Step		5-Step					
CCT	Min	Тур	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C**	Group	Order Code	Group	Order Code	Group	Order Code			
			Y4	6910	7648						CXB3050-0000- 000N0BY465E			
	70		Z2	7390	8179					65E	CXB3050-0000- 000N0BZ265E			
6500 K			Z4	7945	8793						CXB3050-0000- 000N0BZ465E			
6500 K			Y2	6430	7116						CXB3050-0000- 000N0HY265E			
	80	80	80 \	Y4	6910	7648					65E	CXB3050-0000- 000N0HY465E		
						Z2	7390	8179						CXB3050-0000- 000N0HZ265E
						Y4	6910	7648						CXB3050-0000- 000N0BY457E
	70	70	Z2	7390	8179					57E	CXB3050-0000- 000N0BZ257E			
5700 K			Z4	7945	8793			CXB3050-0000- 000N0BZ457E						
3700 K			Y2	6430	7116						CXB3050-0000- 000N0HY257E			
	80		Y4	6910	7648					57E	CXB3050-0000- 000N0HY457E			
					Z2	7390	8179						CXB3050-0000- 000N0HZ257E	

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 13).
- Cree XLamp CXB3050 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * For 80 CRI minimum LEDs, CRI R9 minimum is 0 with a ±2 tolerance. For 90 CRI minimum LEDs, CRI R9 typical is 60.
- ** Flux values @ 25 °C are calculated and for reference only.



FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS (I_F = 1400 mA, T_I = 85 °C) - CONTINUED

Naminal	CRI*		Minimum Luminous Flux		2-Step		3-Step		5-Step					
CCT	Min	Тур	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C**	Group	Order Code	Group	Order Code	Group	Order Code			
			Y4	6910	7648						CXB3050-0000- 000N0BY450E			
	70		Z2	7390	8179					50E	CXB3050-0000- 000N0BZ250E			
			Z4	7945	8793						CXB3050-0000- 000N0BZ450E			
			Y2	6430	7116				CXB3050-0000- 000N0HY250G		CXB3050-0000- 000N0HY250E			
5000 K	80		Y4	6910	7648			50G	CXB3050-0000- 000N0HY450G	50E	CXB3050-0000- 000N0HY450E			
			Z2	7390	8179				CXB3050-0000- 000N0HZ250G					
	90 92					X4	6010	6652				CXB3050-0000- 000N0UX450G		
		92	Y2	6430	7116			50G	CXB3050-0000- 000N0UY250G					
			Y4	6910	7648				CXB3050-0000- 000N0UY450G					
			Y4	6910	7648						CXB3050-0000- 000N0BY440E			
	70		Z2	7390	8179					40E	CXB3050-0000- 000N0BZ240E			
			Z4	7945	8793						CXB3050-0000- 000N0BZ440E			
				Y2	6430	7116		CXB3050-0000- 000N0HY240H		CXB3050-0000- 000N0HY240G				
4000 K	80		Y4	6910	7648	40H	CXB3050-0000- 000N0HY440H	40G	CXB3050-0000- 000N0HY440G					
			Z2	7390	8179		CXB3050-0000- 000N0HZ240H		CXB3050-0000- 000N0HZ240G					
			X2	5590	6187		CXB3050-0000- 000N0UX240H		CXB3050-0000- 000N0UX240G					
	90	92	X4	6010	6652	40H	CXB3050-0000- 000N0UX440H	40G	CXB3050-0000- 000N0UX440G					
			Y2	6430	7116		CXB3050-0000- 000N0UY240H		CXB3050-0000- 000N0UY240G					

Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 13).
- Cree XLamp CXB3050 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * For 80 CRI minimum LEDs, CRI R9 minimum is 0 with a ±2 tolerance. For 90 CRI minimum LEDs, CRI R9 typical is 60.
- ** Flux values @ 25 °C are calculated and for reference only.



FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS (I_F = 1400 mA, T_I = 85 °C) - CONTINUED

Nominal	CF	? I*	Minin	num Lumino	ous Flux		2-Step	3-Step			5-Step
CCT	Min	Тур	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C**	Group	Order Code	Group	Order Code	Group	Order Code
	80		Y2	6430	7116	35H	CXB3050-0000- 000N0HY235H	35G	CXB3050-0000- 000N0HY235G		
	80		Y4	6910	7648	350	CXB3050-0000- 000N0HY435H	35G	CXB3050-0000- 000N0HY435G		
3500 K			X2	5590	6187		CXB3050-0000- 000N0UX235H		CXB3050-0000- 000N0UX235G		
	90	92	X4	6010	6652	35H	CXB3050-0000- 000N0UX435H	35G	CXB3050-0000- 000N0UX435G		
			Y2	6430	7116		CXB3050-0000- 000N0UY235H		CXB3050-0000- 000N0UY235G		
			X4	6010	6652		CXB3050-0000- 000N0HX430H		CXB3050-0000- 000N0HX430G		
	80		Y2	Y2 6430 7	7116	30H	CXB3050-0000- 000N0HY230H	30G	CXB3050-0000- 000N0HY230G		
3000 K			Y4	6910	7648		CXB3050-0000- 000N0HY430H		CXB3050-0000- 000N0HY430G		
3000 K		92	W4	5225	5783		CXB3050-0000- 000N0UW430H		CXB3050-0000- 000N0UW430G		
	90		X2	5590	6187	30H	CXB3050-0000- 000N0UX230H	30G	CXB3050-0000- 000N0UX230G		
			X4	6010	6652		CXB3050-0000- 000N0UX430H		CXB3050-0000- 000N0UX430G		
	80		X4	6010	6652	27H	CXB3050-0000- 000N0HX427H	27G	CXB3050-0000- 000N0HX427G		
	80		Y2	6430	7116	2/П	CXB3050-0000- 000N0HY227H	2/G	CXB3050-0000- 000N0HY227G		
2700 K			W2	4860	5379		CXB3050-0000- 000N0UW227H		CXB3050-0000- 000N0UW227G		
	90	92	W4	5225	5783	27H	CXB3050-0000- 000N0UW427H	27G	CXB3050-0000- 000N0UW427G		
			X2	5590	6187		CXB3050-0000- 000N0UX227H		CXB3050-0000- 000N0UX227G		
2200 K	80		X2	5590	6187			22G	CXB3050-0000- 000N0HX222G		


Notes

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 13).
- Cree XLamp CXB3050 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * For 80 CRI minimum LEDs, CRI R9 minimum is 0 with a ±2 tolerance. For 90 CRI minimum LEDs, CRI R9 typical is 60.
- ** Flux values @ 25 °C are calculated and for reference only.




RELATIVE SPECTRAL POWER DISTRIBUTION

The following graph is the result of a series of pulsed measurements at 1400 mA and T_1 = 85 °C.

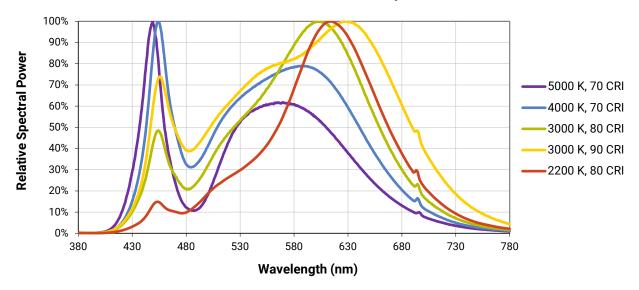

ELECTRICAL CHARACTERISTICS

The following graph is the result of a series of steady-state measurements.

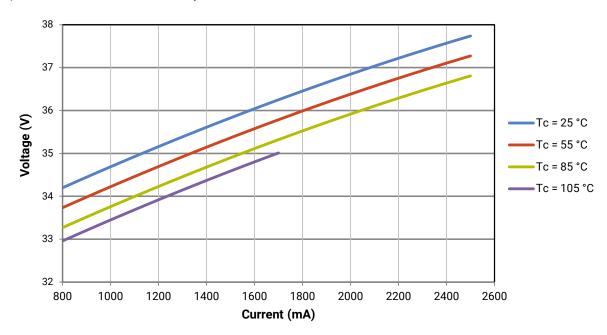




RELATIVE LUMINOUS FLUX

The relative luminous flux values provided below are the ratio of:


- · Measurements of CXB3050 at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 1400 mA at T_J = 85 °C.

For example, at steady-state operation of Tc = 25 °C, I_F = 1600 mA, the relative luminous flux ratio is 120% in the chart below. A CXB3050 LED that measures 6010 lm during binning will deliver 7212 lm (6010 * 1.2) at steady-state operation of Tc = 25 °C, I_F = 1600 mA.

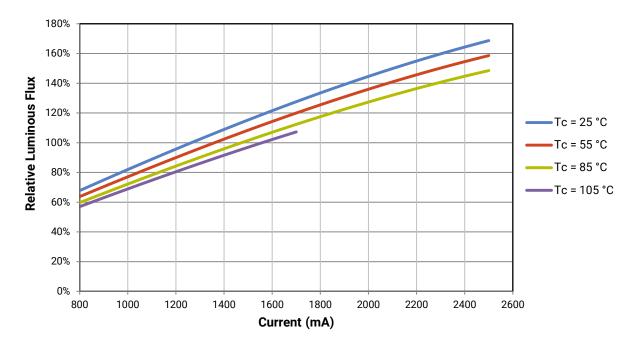



TYPICAL SPATIAL DISTRIBUTION

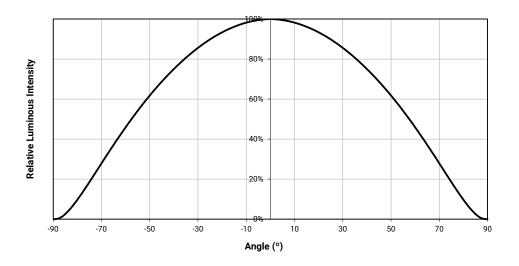

PERFORMANCE GROUPS - BRIGHTNESS (I_F = 1400 mA, T_J = 85 °C)

XLamp CXB3050 LEDs are tested for luminous flux and placed into one of the following bins.

Group Code	Minimum Luminous Flux	Maximum Luminous Flux
W2	4860	5225
W4	5225	5590
X2	5590	6010
X4	6010	6430
Y2	6430	6910
Y4	6910	7390
Z2	7390	7945
Z4	7945	8500
AB	8500	9000



PERFORMANCE GROUPS - CHROMATICITY (T₁ = 85 °C)

XLamp CXB3050 LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.


EasyWhite Color Temperatures - 2-Step							
Code	CCT	х	у				
		0.3777	0.3739				
40H	4000 K	0.3797	0.3816				
4 0П	4000 K	0.3861	0.3855				
		0.3838	0.3777				
		0.4022	0.3858				
35H	3500 K	0.4053	0.3942				
ээп		0.4125	0.3977				
		0.4091	0.3891				
		0.4287	0.3975				
30H	3000 K	0.4328	0.4064				
зип		0.4390	0.4086				
		0.4347	0.3996				
		0.4524	0.4048				
27H	2700 K	0.4574	0.4140				
2/П	2700 K	0.4633	0.4154				
		0.4581	0.4062				

EasyWhite Color Temperatures - 3-Step Ellipse									
Bin Code	сст	Cente	r Point	Major Axis	Minor Axis	Rotation Angle			
Bill Code	CCI	х	у	а	b	(°)			
50G	5000 K	0.3447	0.3553	0.00840	0.00312	65.0			
40G	4000 K	0.3818	0.3797	0.00939	0.00402	53.7			
35G	3500 K	0.4073	0.3917	0.00927	0.00414	54.0			
30G	3000 K	0.4338	0.4030	0.00834	0.00408	53.2			
27G	2700 K	0.4577	0.4099	0.00834	0.00420	48.5			
22G	2200 K	0.5066	0.4158	0.00980	0.00480	45.5			

EasyWhite Color Temperatures - 5-Step Ellipse									
Din Code	n Code CCT	Cente	r Point	Major Axis	Minor Axis	Rotation Angle			
Bill Code		x	у	а	b	(°)			
65E	6500 K	0.3123	0.3282	0.01110	0.00550	61.0			
57E	5700 K	0.3287	0.3417	0.01230	0.00600	72.0			
50E	5000 K	0.3447	0.3553	0.01400	0.00520	65.0			
40E	4000 K	0.3818	0.3797	0.01565	0.00670	53.7			




CREE EASYWHITE® BINS PLOTTED ON THE 1931 CIE COLOR SPACE

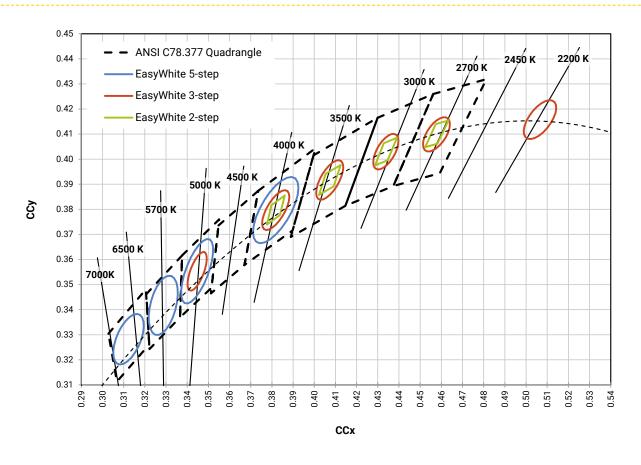




BIN AND ORDER CODE FORMATS

Bin codes and order codes are configured as follows:

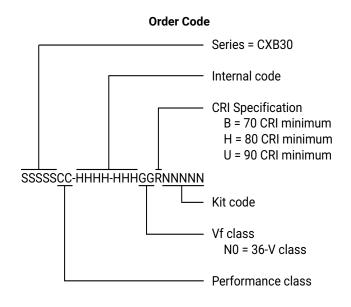



MECHANICAL DIMENSIONS

Dimensions are in mm.


Tolerances unless otherwise

specified: ±.13

x° ±1°

Meaning of B3050N

B3050N = 36-V CXB3050

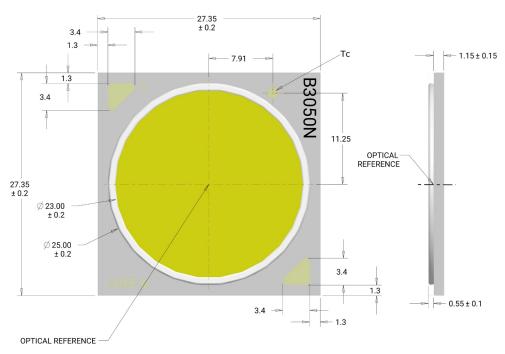




THERMAL DESIGN

The CXB family of LED arrays can include over a hundred different LED die inside one package, and thus over a hundred different junction temperatures (T_j) . Cree has intentionally removed junction-temperature-based operating limits and replaced the commonplace maximum T_j calculations with maximum ratings based on forward current (I_F) and case temperature (T_C) . No additional calculations are required to ensure that the CXB LED is being operated within its designed limits. LES temperature measurement provides additional verification of good thermal design. Please refer to page 2 for the Operating Limit specifications.

There is no need to calculate for T_J inside the package, as the thermal management design process, specifically from T_{SP} to ambient (T_a) , remains identical to any other LED component. For more information on thermal management of Cree XLamp LEDs, please refer to the Thermal Management application note. For CXB soldering recommendations and more information on thermal interface materials (TIM), LES temperature measurement, and connection methods, please refer to the Cree XLamp CX Family LEDs soldering and handling document. The CX Family LED Design Guide provides basic information on the requirements to use Cree XLamp CXB LEDs successfully in luminaire designs.

To keep the CXB3050 LED at or below the maximum rated Tc, the case to ambient temperature thermal resistance (R_c-a) must be at or below the maximum R_c-a value shown on the following graph, depending on the operating environment. The y-axis in the graph is a base 10 logarithmic scale.

As the figure at right shows, the R_c -a value is the sum of the thermal resistance of the TIM (R_t im) plus the thermal resistance of the heat sink (R_t).

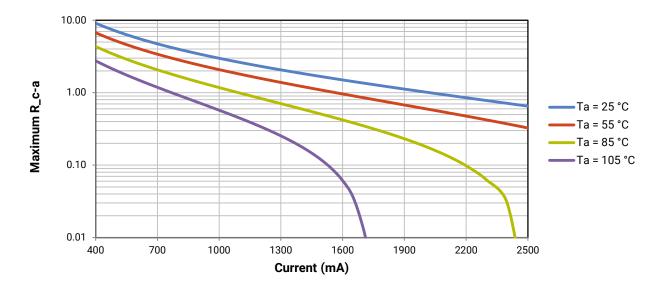



NOTES

Measurements

The luminous flux, radiant power, chromaticity, forward voltage and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree's control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended or provided as specifications.

Pre-Release Qualification Testing

Please read the LED Reliability Overview for details of the qualification process Cree applies to ensure long-term reliability for XLamp LEDs and details of Cree's pre-release qualification testing for XLamp LEDs.

Lumen Maintenance

Cree now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public LM-80 results document.

Please read the Long-Term Lumen Maintenance application note for more details on Cree's lumen maintenance testing and forecasting. Please read the Thermal Management application note for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Ecology section of the Cree website.

REACh Compliance

REACh substances of very high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACh Declaration. REACh banned substance information (REACh Article 67) is also available upon request.

UL® Recognized Component

This product meets the requirements to be considered a UL Recognized Component with Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/UL 8750.

Vision Advisory

WARNING: Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the LED Eye Safety application note.



PACKAGING

Cree CXB3050 LEDs are packaged in trays of 20. Five trays are sealed in an anti-static bag and placed inside a carton, for a total of 100 LEDs per carton. Each carton contains 100 LEDs from the same performance bin.

