


U - -


Order No.: 2968360

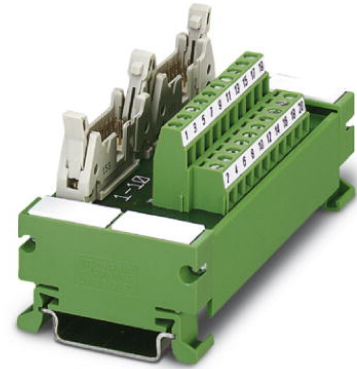

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2968360>

VARIOFACE COMPACT LINE, interface module for Allen-Bradley Controll-Logix, with Controll-Logix-specific labeling, no. of positions: 2 x 14, module width: 98 mm



Commercial data	
GTIN (EAN)	 4 017918 587765
Note	Made-to-order
sales group	I631
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 201 (IF-2007)

Product notes

WEEE/RoHS-compliant since:
07/28/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Nominal voltage U_N	< 50 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Max. total current of voltage supply	max. 3 A (/Byte)

Width	98 mm
Height	45 mm
Depth	50 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min.)
Test voltage contact/contact	0.5 kV AC
Mounting position	Any
Standards/regulations	IEC 60664 DIN VDE 0109-11
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	Field level
Type of connection	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14
Stripping length	6 mm
Screw thread	M3
Connection 2	Control system level
Number of connections	2
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14

certification **global**




Certification

GOST

Diagram

Circuit diagram

UM 45-2FLK14/AB-1756 connection scheme

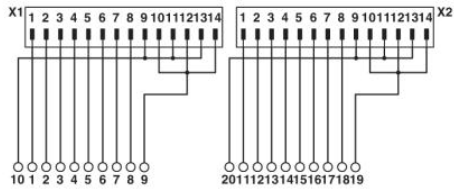

re

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;