
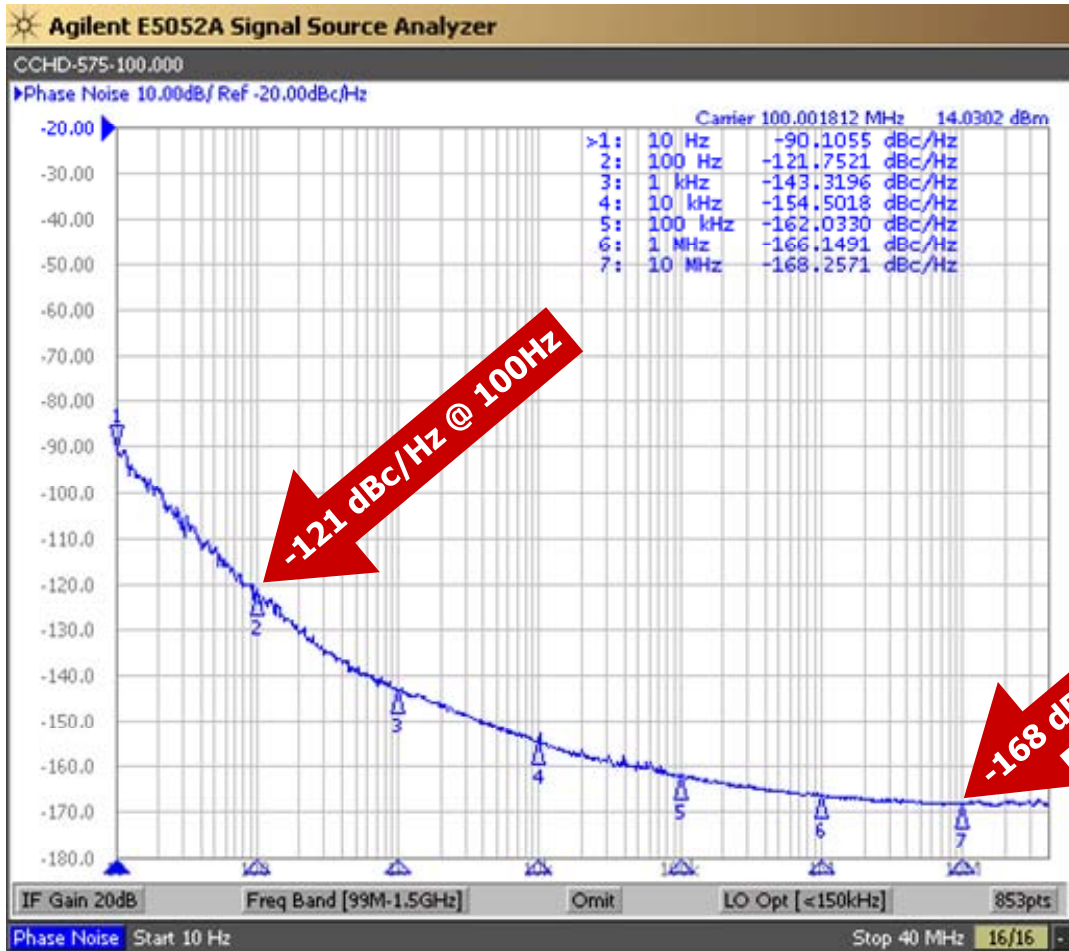


CCHD-575

Ultra-Low Phase Noise Oscillator

CCHD-575 Model
5×7.5 mm SMD, 3.3V, HCMOS



Model CCHD-575 is the industry's lowest jitter clock oscillator in a 5×7.5 mm package. It features a typical phase jitter of 82 fSec RMS at 100 MHz. Close-in phase noise is -90 dBc/Hz @ 10 Hz while its floor is at -168 dBc/Hz. This oscillator may be small in size but it packs a punch inside. Its output driver is capable of driving ±24mA. This translates to a rise/fall time of ~600ps at 100 MHz with a 15pF load.

Applications include
DACs
ADCs
Low Phase Signal Sources
Test and Measurement

Rev: T
Date: 02-Oct-2017
Page 1 of 4

CCHD-575

Ultra-Low Phase Noise Oscillator



CCHD-575 Model

5x7.5 mm SMD, 3.3V, HCMOS





Frequency Range:	12 MHz to 125 MHz*
Temperature Range:	0°C to +70°C
(Option M)	-20°C to +70°C
(Option X)	-40°C to +85°C
Storage:	-45°C to 90°C
Input Voltage:	3.3V ±0.3V
Input Current:	15mA Typical, 25mA Max
Output:	HCMOS
Symmetry:	45/55% Max @ 50% Vdd
Rise/Fall Time:	2ns Max @ 20% to 80% Vdd
Logic:	“0” = 10% Vdd Max “1” = 90% Vdd Min
Load:	15pF
Output Current:	±24mA Max
Phase Jitter: (12kHz~80MHz)	82 fs RMS Typical @ 100 MHz
Phase Noise Typical:	See plot
Phase Noise Floor:	-168 dBc/Hz Typical, -165 dBc/Hz Max
Sub-harmonics:	None
Aging:	<3ppm 1 st year, <1ppm thereafter




CCHD-575 Options:	
Temperature Range:	0°C to +70°C (±20ppm, ±25ppm, ±50ppm) -20°C to +70°C (±25ppm, ±50ppm) -40°C to +85°C (±25ppm, ±50ppm)

Part Number Example:
CCHD-575X-25-100.000 = 3.3V, 45/55, -40°C to +85°C (±25ppm), 100 MHz

RECOMMENDED REFLOW SOLDERING PROFILE

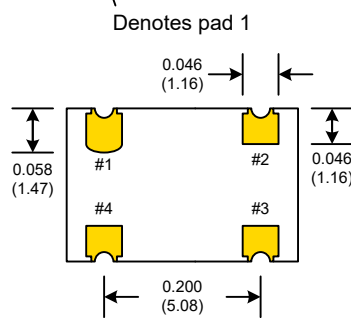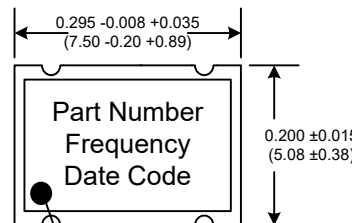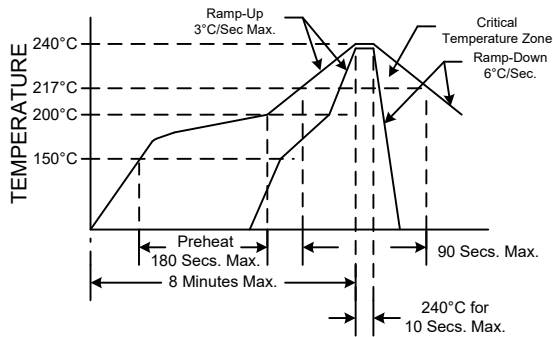

SUGGESTED PAD LAYOUT

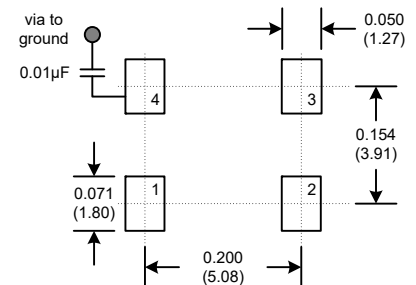

*Standard Frequencies (MHz)	
12.000	48.000
16.924400	49.152
22.579200	50.000
24.000	54.000
24.576	80.000
27.000	100.000
40.000	125.000
45.158400	

Pad	Connection
1	NC
2	GND
3	Output
4	Vdd

PAD FINISH: Immersion Gold (ENIG); 5 micro inches maximum



Rev: T
Date: 02-Oct-2017
Page 2 of 4

Specifications subject to change without notice.

CCHD-575

Ultra-Low Phase Noise Oscillator

CCHD-575 Model
5×7.5 mm SMD, 3.3V, HCMOS

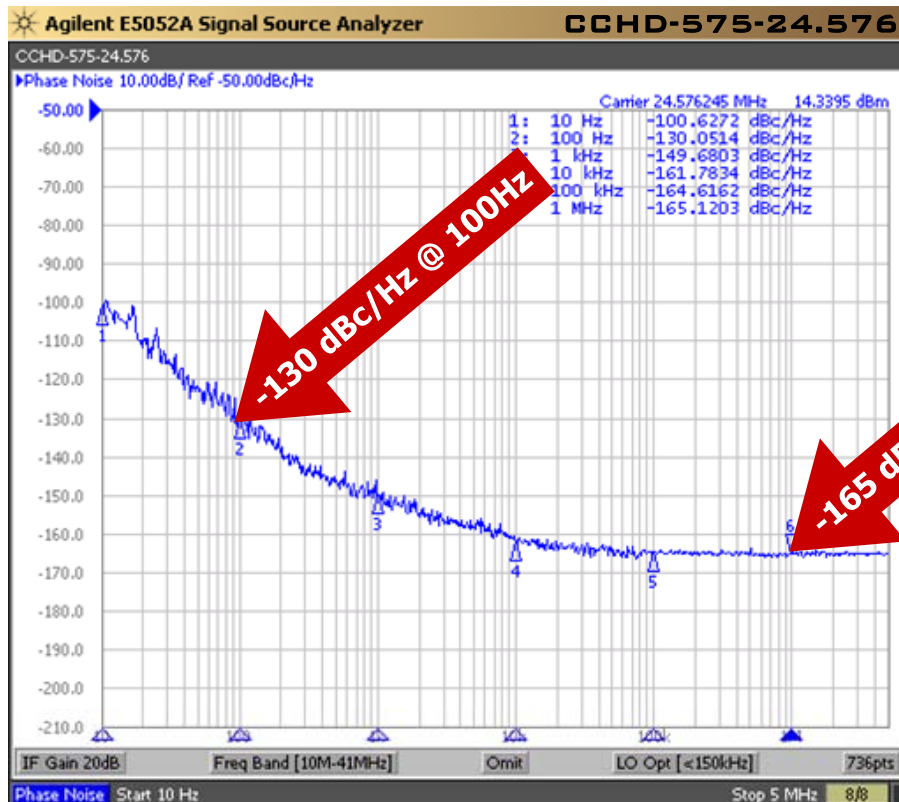
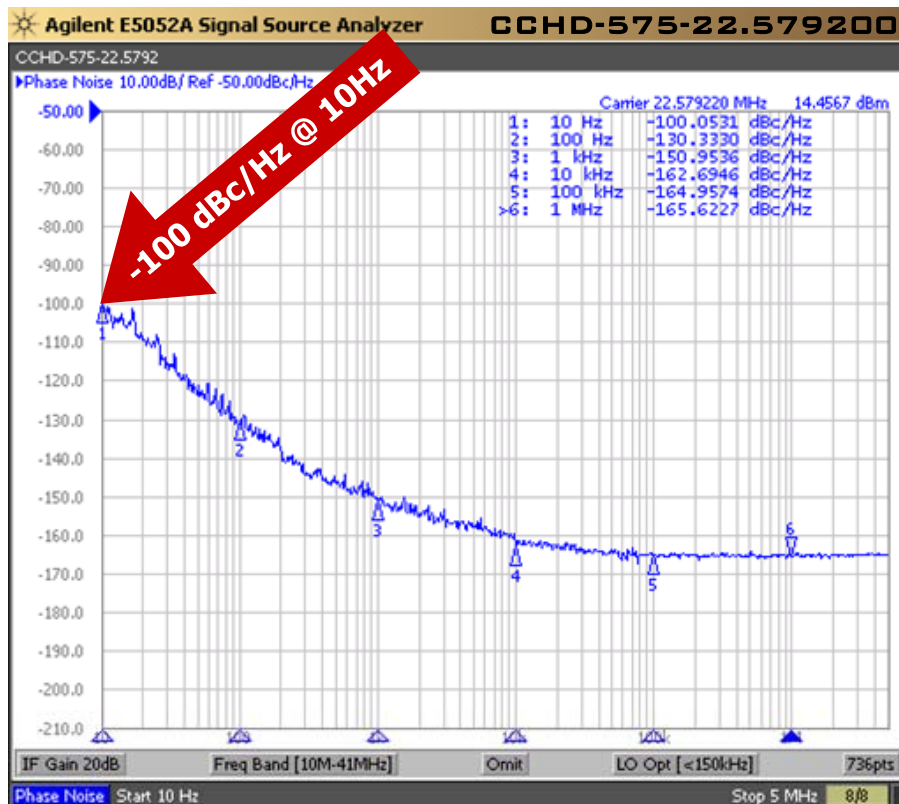


Rev: T
Date: 02-Oct-2017
Page 3 of 4

CCHD-575

Ultra-Low Phase Noise Oscillator

CCHD-575 Model
5×7.5 mm SMD, 3.3V, HCMOS

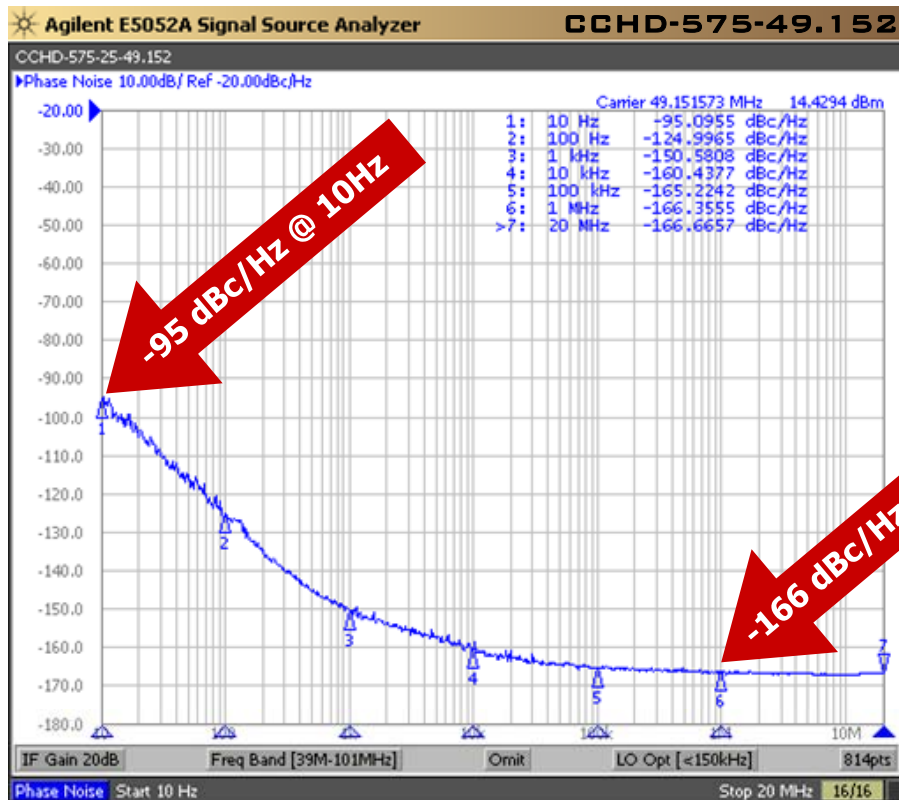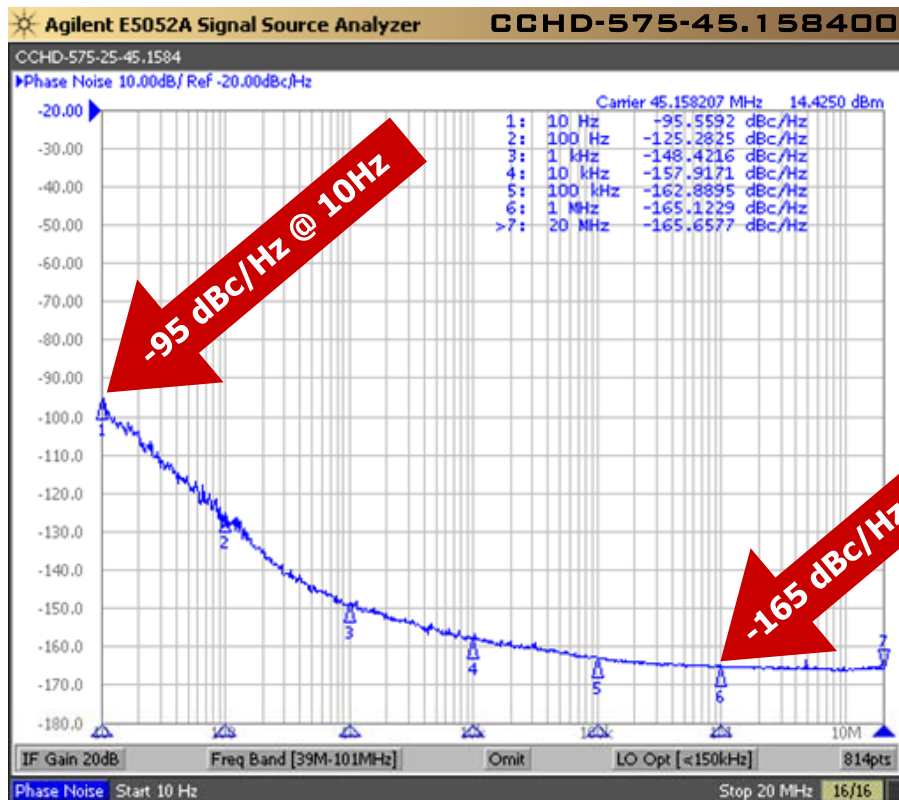

Rev: T
Date: 02-Oct-2017
Page 4 of 4