

ALUMINUM ELECTROLYTIC CAPACITORS

UWP

5.5mmL Chip Type, Bi-Polarized




- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).



Specifications


Item	Performance Characteristics												
Category Temperature Range	-40 to +85°C												
Rated Voltage Range	6.3 to 50V												
Rated Capacitance Range	0.1 to 100μF												
Capacitance Tolerance	±20% at 120Hz, 20°C												
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.05CV or 10 (μA), whichever is greater.												
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C												
	Rated voltage (V) tan δ (MAX.)	6.3 0.24	10 0.20	16 0.17	25 0.17	35 0.15	50 0.15						
Stability at Low Temperature	Measurement frequency : 120Hz												
	Rated voltage (V) Impedance ratio ZT / Z20 (MAX.)	6.3 Z-25°C / Z+20°C Z-40°C / Z+20°C	10 4 8	16 3 6	25 2 4	35 2 4	50 2 3						
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C with the polarity inverted every 250 hours.		<table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>					Capacitance change	Within ±20% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value
Capacitance change	Within ±20% of the initial capacitance value												
tan δ	200% or less than the initial specified value												
Leakage current	Less than or equal to the initial specified value												
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.												
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.		<table border="1"> <tr> <td>Capacitance change</td> <td>Within ±10% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>					Capacitance change	Within ±10% of the initial capacitance value	tan δ	Less than or equal to the initial specified value	Leakage current	Less than or equal to the initial specified value
Capacitance change	Within ±10% of the initial capacitance value												
tan δ	Less than or equal to the initial specified value												
Leakage current	Less than or equal to the initial specified value												
Marking	Black print on the case top.												

Chip Type

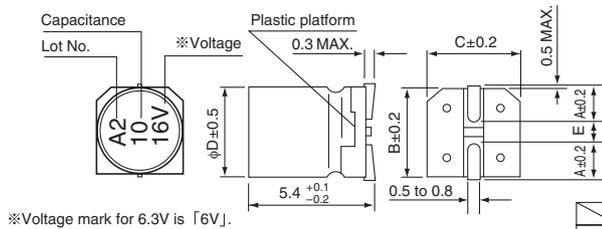

φD	4	5	6.3	8
A	1.8	2.1	2.4	3.3
B	4.3	5.3	6.6	8.3
C	4.3	5.3	6.6	8.3
E	1.0	1.3	2.2	2.3

Type numbering system (Example : 16V 10μF)

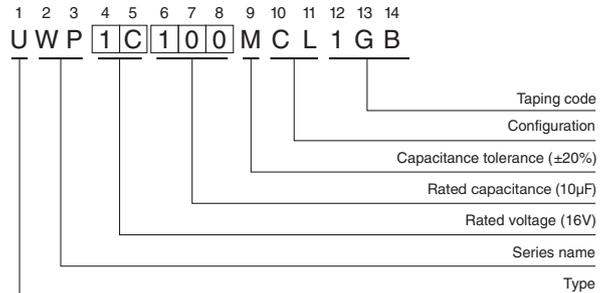

Dimensions

Cap. (μF)	Code	V		6.3		10		16		25		35		50	
		0J	1A	1C	1E	1V	1H								
0.1	0R1													4	1.0
0.22	R22													4	2.0
0.33	R33													4	2.8
0.47	R47													4	4.0
1	010													4	8.4
2.2	2R2													5	13
3.3	3R3													5	17
4.7	4R7													6.3	20
10	100			4	17	5	23	6.3	27	6.3	29	8	36		
22	220	5	28	6.3	33	6.3	37	8	50	8	54				
33	330	6.3	37	6.3	41	6.3	49	8	61						
47	470	6.3	45	8	61	8	75								
100	101	8	82												

Rated ripple current (mArms) at 85°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUN(p.164) if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.