

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	1




Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Male crimp
IP rating	50
Cable Ø	7.30 - 9.20 mm
Matching parts	
Status	active
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	CA*: Straight plug with cable collet
Keying	3 keys (alpha=0, gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), black
Cable Fixing	∅ 7.3 - 9.2 mm
Variant	
Weight	10.88 g

Performance

Configuration	2P.015 : 1 Fluidic, 10 Low V.
Insulator	
Rated Current	5 Amps

Specifications

Test voltage (kV rms) Contact-contact:	1.15
Air clearance min. (mm) or Creepage distance min. (mm):	0.9


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

IP Rating: 50

DRAWINGS

Draws

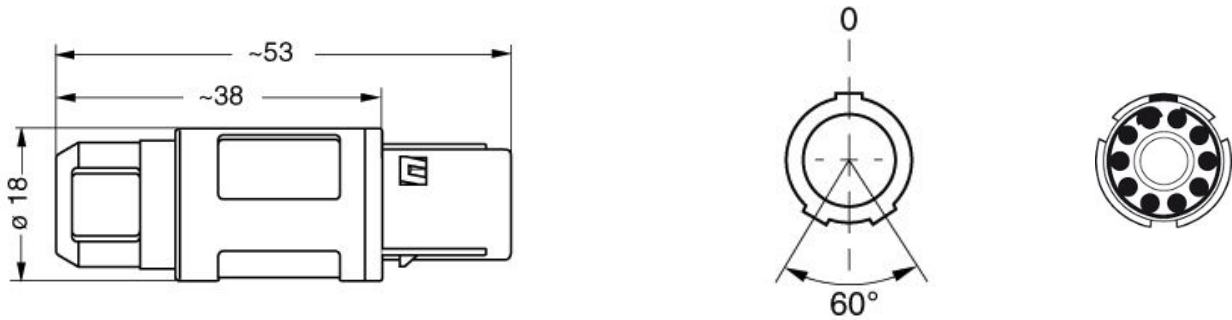

Dimensions

	A	L
mm.	18	53
in.	0,71	2,09

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

Positionner: DCE.91.072.BVC

Extractor: DCF.91.070.2LT

Replacement contact: FGG.2B.555.ZZC

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.