


# SMD Power Inductor CDRH5D18



Halogen Free



## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 6.0 × 6.0 × 2.0 mm Max.
- Product weight: 220mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -40°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +100°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging
- 13.0" diameter reel
- 2000pcs per reel


## Applications

- Ideally used in Mobile phone, MP3, PDA, HDD, DSC/DVC, Game machine, etc as DC-DC converter inductors.

## Dimension - [mm]

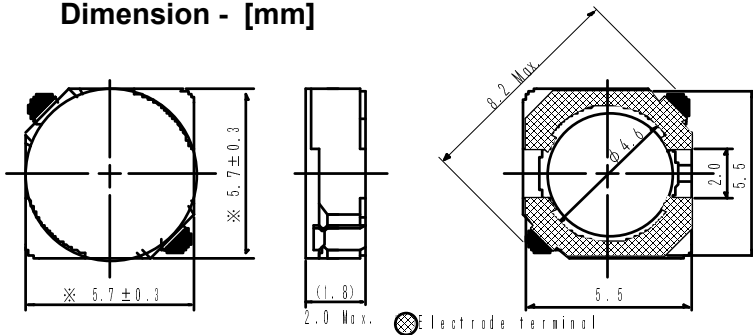

## Land pattern and Schematics - [mm]

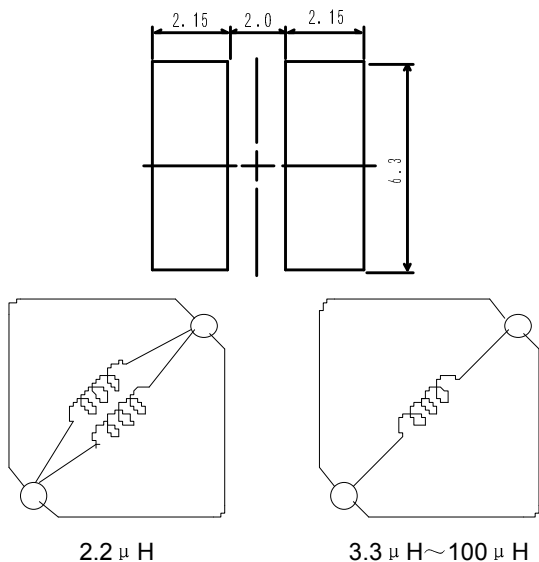

# SMD Power Inductor CDRH5D18



## Electrical Characteristics

PART NO.	STAMP	INDUCTANCE ( $\mu$ H) [WITHIN] ※1	D.C.R. ( $\Omega$ ) [MAX.] (TYP.) (at 20°C)※2	RATED CURRENT (A) ※2
CDRH5D18NP-2R2NC	2R2	2.2 $\mu$ H $\pm$ 30%	37m (27m)	2.4
CDRH5D18NP-3R3NC	3R3	3.3 $\mu$ H $\pm$ 30%	47m (35m)	2.0
CDRH5D18NP-4R1NC	4R1	4.1 $\mu$ H $\pm$ 30%	57m (42m)	1.95
CDRH5D18NP-5R4NC	5R4	5.4 $\mu$ H $\pm$ 30%	76m (56m)	1.60
CDRH5D18NP-6R2NC	6R2	6.2 $\mu$ H $\pm$ 30%	96m (71m)	1.40
CDRH5D18NP-8R9NC	8R9	8.9 $\mu$ H $\pm$ 30%	116m (86m)	1.25
CDRH5D18NP-100NC	100	10 $\mu$ H $\pm$ 30%	124m (92m)	1.20
CDRH5D18NP-120NC	120	12 $\mu$ H $\pm$ 30%	153m (113m)	1.10
CDRH5D18NP-150NC	150	15 $\mu$ H $\pm$ 30%	196m (145m)	0.97
CDRH5D18NP-180NC	180	18 $\mu$ H $\pm$ 30%	210m (155m)	0.85
CDRH5D18NP-220NC	220	22 $\mu$ H $\pm$ 30%	290m (215m)	0.80
CDRH5D18NP-270NC	270	27 $\mu$ H $\pm$ 30%	330m (245m)	0.75
CDRH5D18NP-330NC	330	33 $\mu$ H $\pm$ 30%	385m (285m)	0.65
CDRH5D18NP-390NC	390	39 $\mu$ H $\pm$ 30%	520m (385m)	0.57
CDRH5D18NP-470NC	470	47 $\mu$ H $\pm$ 30%	595m (440m)	0.54
CDRH5D18NP-560NC	560	56 $\mu$ H $\pm$ 30%	665m (493m)	0.50
CDRH5D18NP-680NC	680	68 $\mu$ H $\pm$ 30%	840m (622m)	0.43
CDRH5D18NP-820NC	820	82 $\mu$ H $\pm$ 30%	978m (725m)	0.41
CDRH5D18NP-101NC	101	100 $\mu$ H $\pm$ 30%	1.2 (895m)	0.36

※1. Inductance measuring condition: at 10kHz.


※2. Rated current: The DC current at which the inductance decreases to 65% of it's nominal value or when  $\Delta t=30^{\circ}\text{C}$ , whichever is lower ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDRH5D18



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$

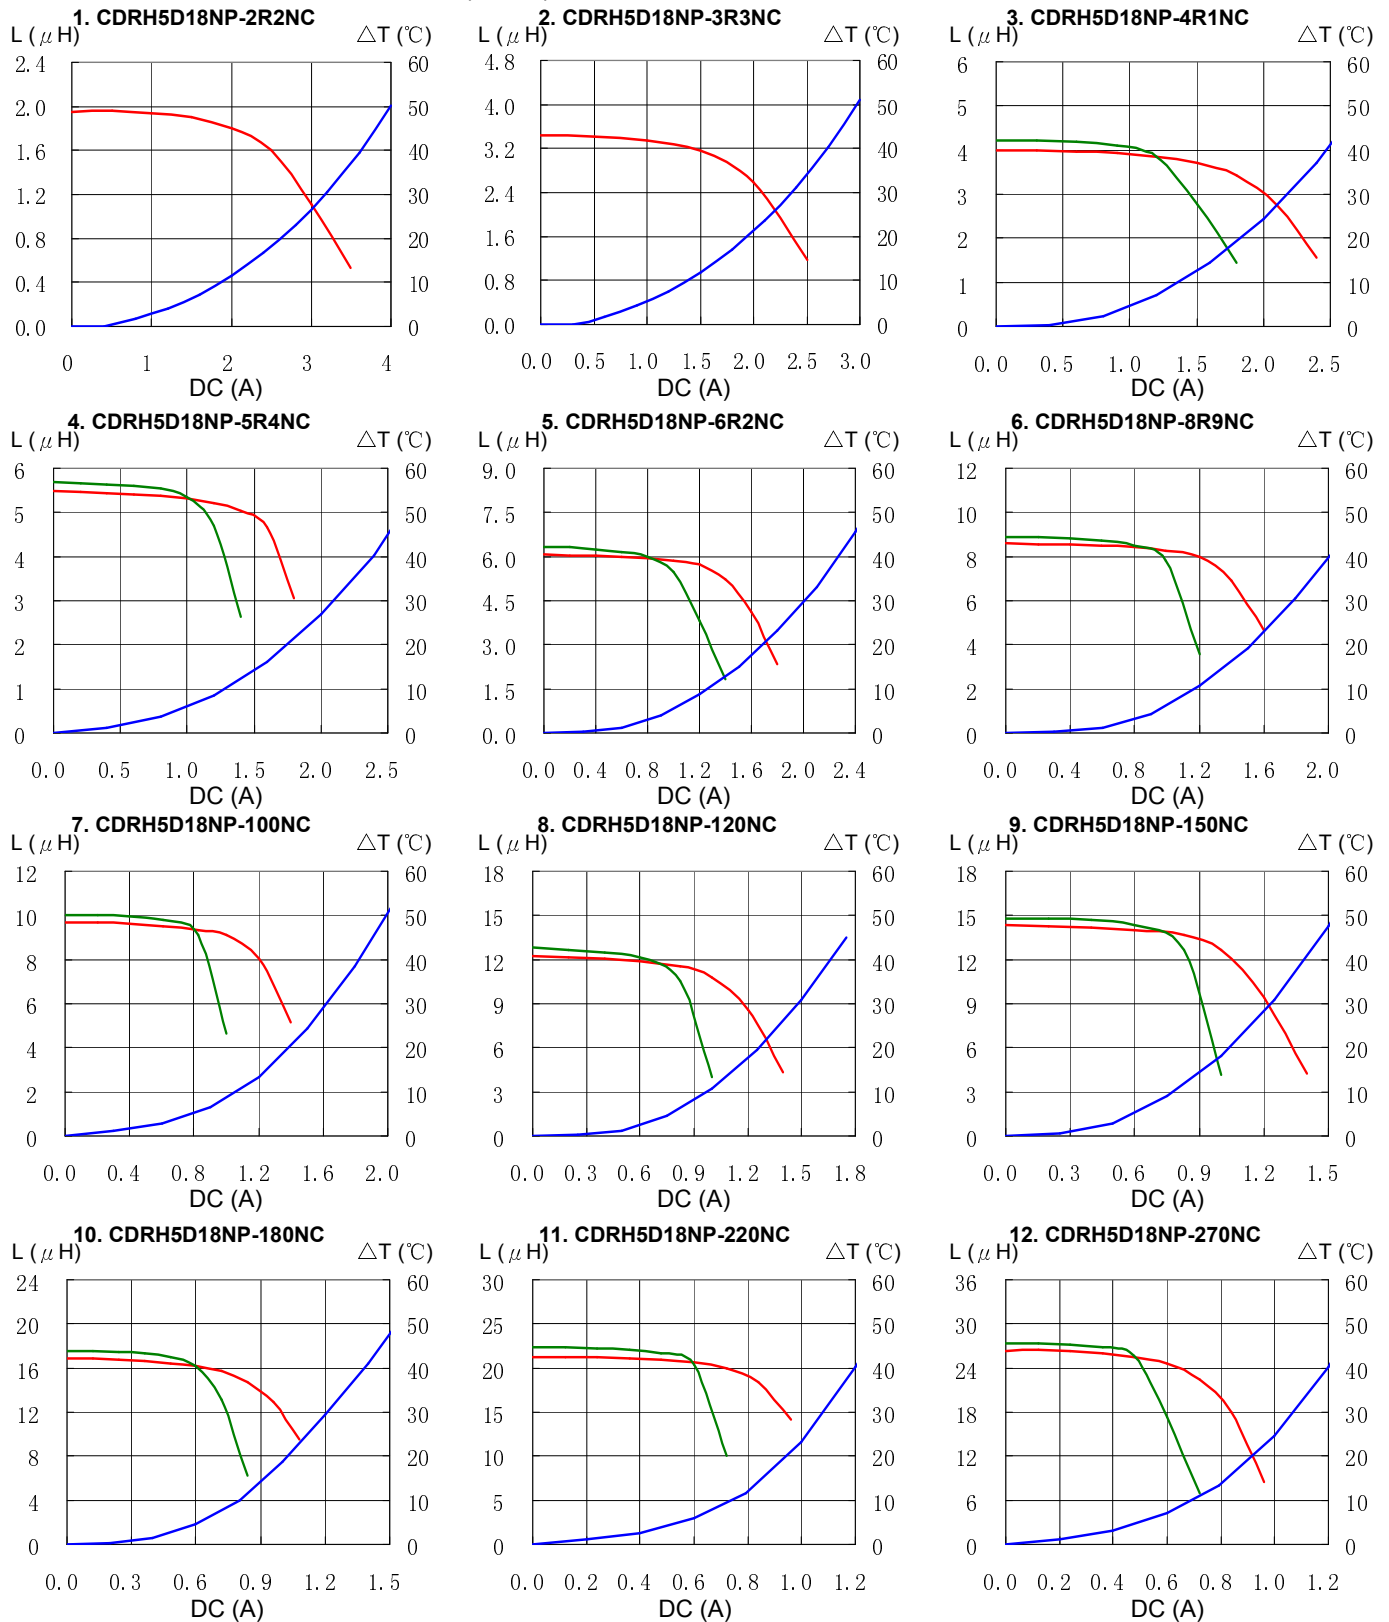


# SMD Power Inductor CDRH5D18




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) —  $\Delta T$


13. CDRH5D18NP-330NC

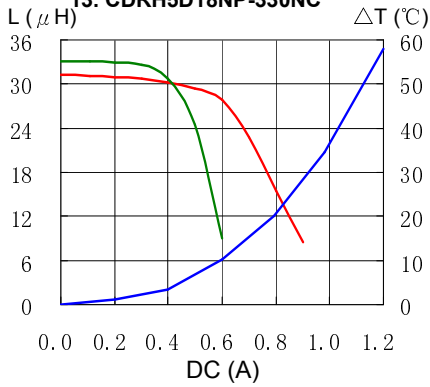


14. CDRH5D18NP-390NC

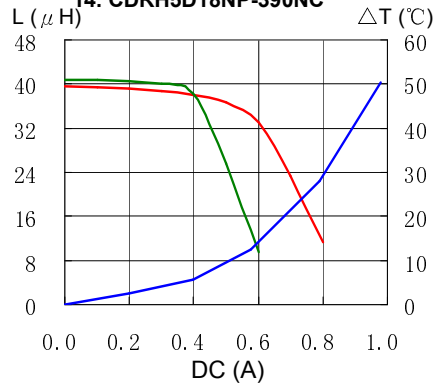


15. CDRH5D18NP-470NC

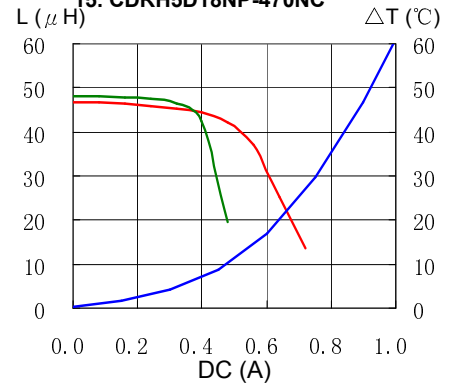


16. CDRH5D18NP-560NC

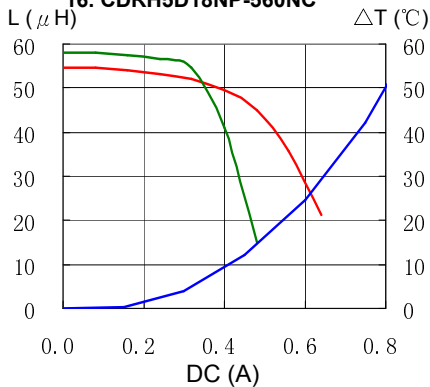


17. CDRH5D18NP-680NC

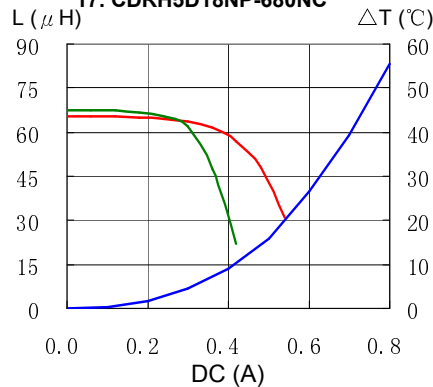

18. CDRH5D18NP-820NC

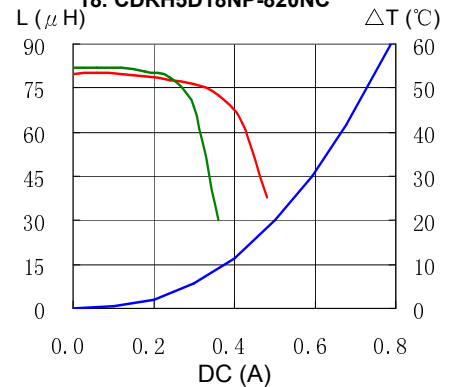



19. CDRH5D18NP-101NC

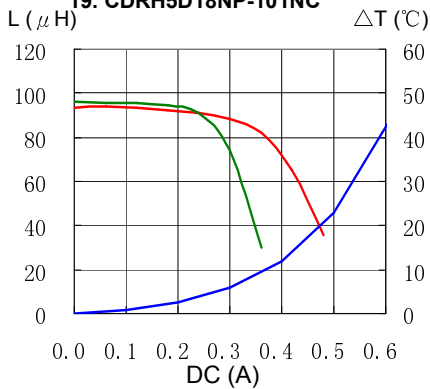

# SMD Power Inductor CDRH5D18



## Solder Reflow Condition

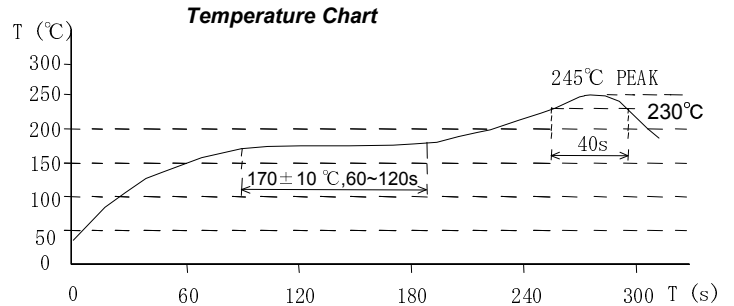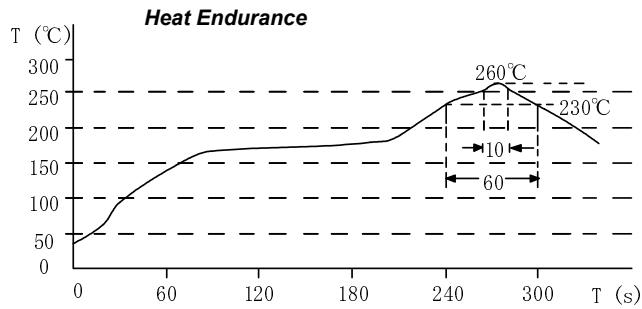

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)