LQH3NPN150NJ0# "#" indicates a package specification code.














Last Time Buy Date: 31 Mar 2018

Date of discontinuation: 30 Apr 2018

< List of part numbers with package codes > LQH3NPN150NJ0L , LQH3NPN150NJ0K

Shape

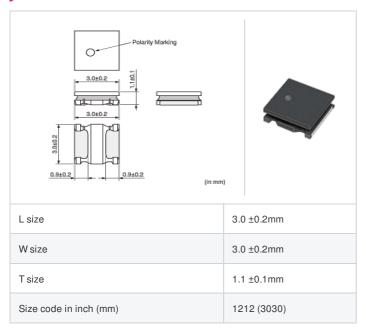



Notes

When applied Rated current to the Products, Inductance will be within ±30% of nomonal Inductance value.

When applied Rated current to the Products, temperature rise caused by self-generated heat shall be limited to 40°C max.

Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.

References

Packaging code	Specifications	Minimum quantity
L	φ180mm Embossed taping	1000
K	φ330mm Embossed taping	5000

Mass (Typ.)	
1 piece	0.045g

Specifications

Inductance	15μH ±30%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	440mA
Rated current (Itemp) (Based on Temperature rise)	590mA
Max. of DC resistance	0.528Ω
Avg. of DC resistance	0.440Ω±20%
Self resonance frequency (min.)	30MHz
Operating temperature range (Self-temperature rise is included)	-40~125°C
Operating temperature range (Self-temperature rise is not included)	-40~85°C
Class of magnetic shield	Magnetic Resin
Series	LQH3NPN_J0

1 of 2





^{1.} This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




^{2.} This datasheet has only typical specifications because there is no space for detailed specifications

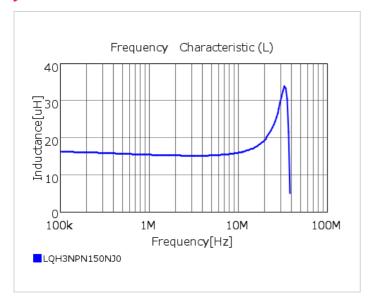

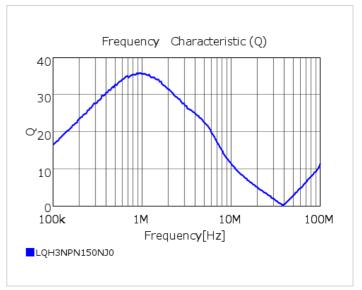

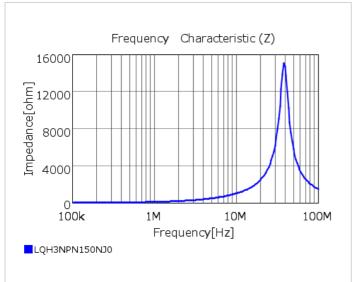

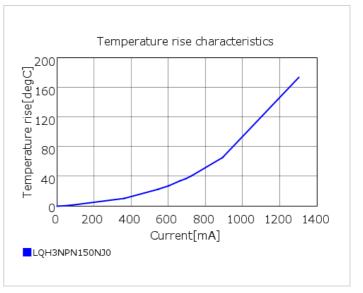

2 of 2



^{1.} This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

^{2.} This datasheet has only typical specifications because there is no space for detailed specifications.