

SUMMARY

Wires

Low	14
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Male solder
IP rating	50
Cable Ø	4.00 - 5.20 mm
Matching parts	
Status	active
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PR*: Free receptacle with cable collet
Keying	2 keys (beta=170; plug: female contacts, receptacle: male contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 4 - 5.2 mm
Variant	
Weight	4.75 g

Performance

Configuration	1P.M14 : 14 Low Voltage
Insulator	
Rated Current	2 Amps

Specifications

Contact Type: Solder
Max. Matings: 2000
Contact Dia.: 0.5 mm (0.0201in)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.


Bucket Dia.: 0.45 mm (0.018in)
 Max. Solid Conductor: 0.09 mm² (AWG 28)
 Max. Stranded Conductor: 0.09 mm² (AWG 28)
 R (max): 8.5 mOhm
 Test voltage (kV rms) Contact-contact: 0.6
 Air clearance min. (mm) or Creepage distance min. (mm): 0.5

Others

F ret (min): 50 N
 F ret (max): 150 N
 R leak (He) (max): 0.0000001 mbar*l/s (if vacuum-tested)
 IP Rating: 50

DRAWINGS

Draws

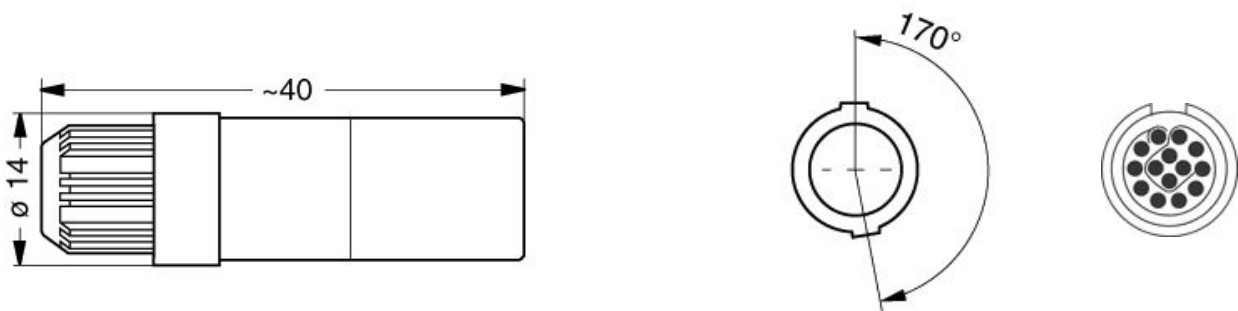

Dimensions

	A	L
mm.	14	40
in.	0,55	1,57

RECOMMENDED BY LEMO

Tools

None

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.